
THIS DOCUMENT CONTAINS DATA PROPRIETARY TO PROJECTS UNLIMITED, INC. ANY USE OR REPRODUCTION, IN ANY FORM, WITHOUT PRIOR WRITTEN PERMISSION OF PROJECTS UNLIMITED, INC. IS PROHIBITED.

© 2005, Projects Unlimited Inc.

**SPECIFICATIONS** 

REVISIONS							
LTR	DESCRIPTION	DATE	APPROVED				
_	RELEASED FROM ENGINEERING	1/27/06					

PARAMETERS	VALUES	UNITS
DIRECTIVITY	OMNIDIRECTIONAL	1
SENSITIVITY	-46±3	dB
STANDARD OPERATING VOLTAGE	2	Vdc
MAX OPERATING VOLTAGE	10	Vdc
CURRENT CONSUMPTION (MAX)	0.5	mΑ
IMPEDANCE	2.2	k0hm
SIGNAL TO NOISE RATIO (MIN.)	60	dB
TERMINAL	SOLDER PADS	-
INTERNAL CAPACITOR	N/A	pF

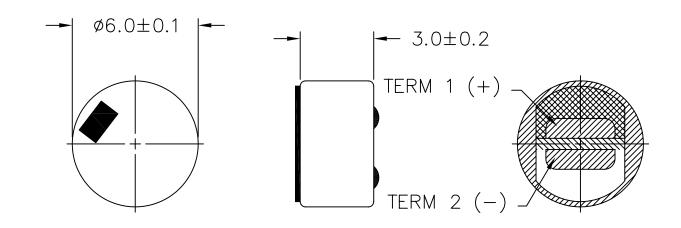

POM-3046L-R.DWG

## NOTES:

- 1. ALL DIMENSIONS ARE IN MILLIMETERS.
- 2. SPECIFICATION SUBJECT TO CHANGE OR WITHDRAWAL WITHOUT NOTICE.
- 3. THIS PART IS RoHS 2002/95/EC COMPLIANT.

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS, TOLERANCES ARE ± ANGLES ARE ±3*.	projects ® unlimited Dayton , Ohio					
APPROVALS	MICROPHONE					
DRAWN J.A.F.	01/06					
CHECKED E.P.	01/06	SIZE A		DRAWING		
APPROVED B.R.	01/06	A	POM-3046L-R			
DO NOT SCALE DRAV	MING	SCALE: N.T.S.			SHEET 1 OF	1