



SKiiP 82 AC 06 - SKiiP 82 AC 06 I

Absolute Maximum Ratings		Values	Units
Symbol	Conditions ¹⁾		
Inverter			
V _{CES}		600	V
V _{GES}		± 20	V
I _C	T _{heatsink} = 25 / 80 °C	64 / 44	A
I _{CM}	t _p < 1 ms; T _{heatsink} = 25 / 80 °C	128 / 88	A
I _F = -I _C	T _{heatsink} = 25 / 80 °C	75 / 50	A
I _{FM} = -I _{CM}	t _p < 1 ms; T _{heatsink} = 25 / 80 °C	150 / 100	A
T _j		- 40 ... + 150	°C
T _{stg}		- 40 ... + 125	°C
V _{isol}	AC, 1 min.	2500	V

Characteristics		min.	typ.	max.	Units
Symbol	Conditions ¹⁾				
IGBT - Inverter					
V _{CEsat}	I _C = 60 A T _j = 25 (125) °C	-	2,1(2,2)	2,7(2,8)	V
t _{d(on)}	V _{CC} = 300 V; V _{GE} = ± 15 V I _C = 60 A; T _j = 125 °C R _{gon} = R _{goff} = 15 Ω inductive load	-	50	100	ns
t _r		-	80	160	ns
t _{d(off)}		-	250	370	ns
t _f		-	500	750	ns
E _{on} + E _{off}		-	8,0	-	mJ
C _{ies}	V _{CE} = 25 V; V _{GE} = 0 V, 1 MHz	-	3,2	-	nF
R _{thjh}	per IGBT	-	-	0,85	K/W
Diode ²⁾ - Inverter					
V _F = V _{EC}	I _F = 75 A T _j = 25 (125) °C	-	1,45(1,4)	1,7(1,7)	V
V _{TO}	T _j = 125 °C	-	0,85	0,9	V
r _T	T _j = 125 °C	-	7	11	mΩ
I _{RRM}	I _F = 75 A, V _R = - 300 V	-	53	-	A
Q _{rr}	di _F /dt = - 800 A/μs	-	6,0	-	μC
E _{off}	V _{GE} = 0 V, T _j = 125 °C	-	2,3	-	mJ
R _{thjh}	per diode	-	-	1,0	K/W
Current sensor for three phase output ac current (SKiiP 82 AC 06 I)					
I _{p RMS}	Continuous current, T = 100 °C, V _{suppl} = ± 15 V	-	50	-	A
I _{pmax RMS}	t ≤ 2 s	-	-	80	A
I _{p peak}	t ≤ 10 μs	-	1000	-	A
R _{out}	terminating resistance	-	50	-	Ω
I _{s RMS}	rated sensor current at I _p = 50 A _{RMS}	-	25	-	mA
I _p : I _s	transfer ratio	-	1 : 2000	-	
Offset _{error}	I _p = 0 A, T = - 40 ... 100 °C	-	± 0,2	-	mA
Linearity		-	0,1	-	%
delay time	I _p = 10 % - 80 % 90 % - 20 %	-	< 1	-	μs
Bandwidth		-	< 1	-	μs
		-	0 - 100 (- 3dB)	-	kHz
Temperature Sensor					
R _{TS}	T = 25 / 100 °C		1000 / 1670		Ω
Mechanical Data					
M ₁	case to heatsink, SI Units	2,5	-	3,5	Nm
Case	mechanical outline see pages B 16 - 11 and B 16 - 12		M8		

MiniSKiiP 8
SEMIKRON integrated
intelligent Power
SKiiP 82 AC 06
SKiiP 82 AC 06 I ³⁾
IGBT
3-phase bridge inverter

Case M8

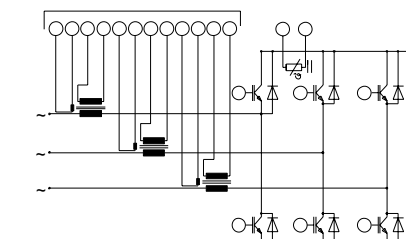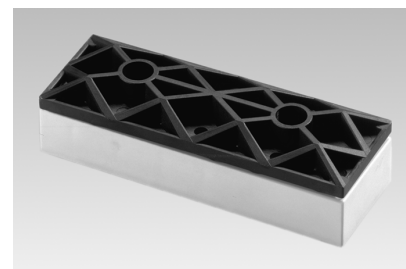

UL recognized file no. E63532

- more detailed characteristics of current sensors and temperature sensor please refer to part A
- common characteristics see page B 16 - 3

Options

- also available with faster IGBTs (type ... 063), data sheet on request

- ¹⁾ T_{heatsink} = 25 °C, unless otherwise specified
- ²⁾ CAL = Controlled Axial Lifetime Technology (soft and fast recovery)
- ³⁾ With integrated closed loop current sensors

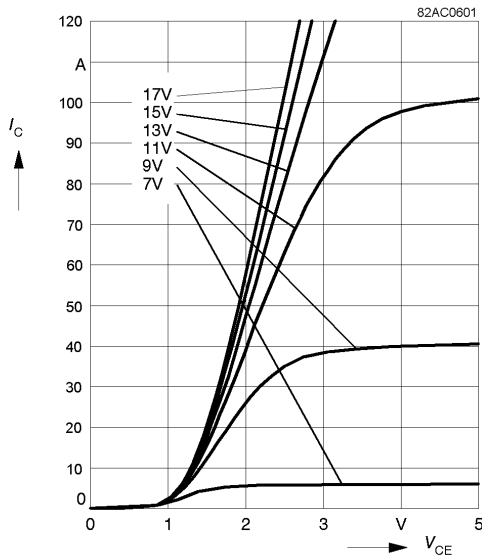


Fig. 1 Typ. output characteristic, $t_p = 80 \mu s$; $25 \text{ }^\circ\text{C}$

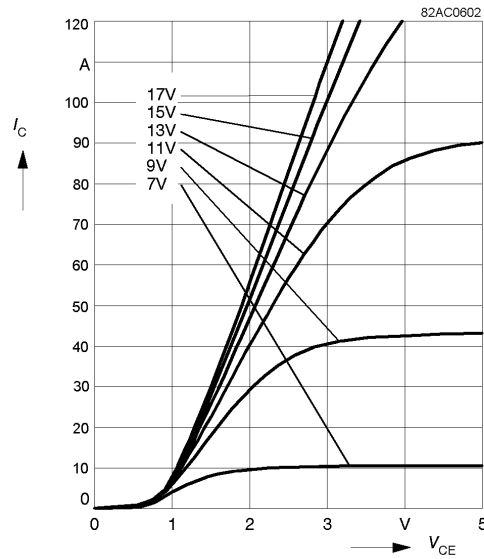


Fig. 2 Typ. output characteristic, $t_p = 80 \mu s$; $125 \text{ }^\circ\text{C}$

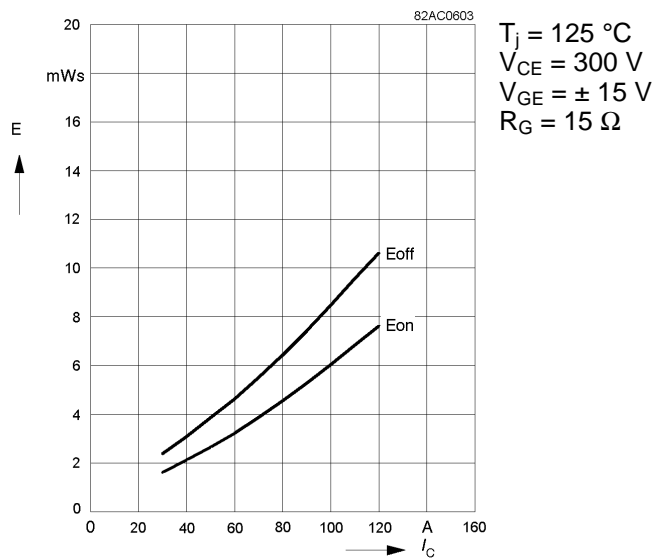


Fig. 3 Turn-on /-off energy = $f(I_c)$

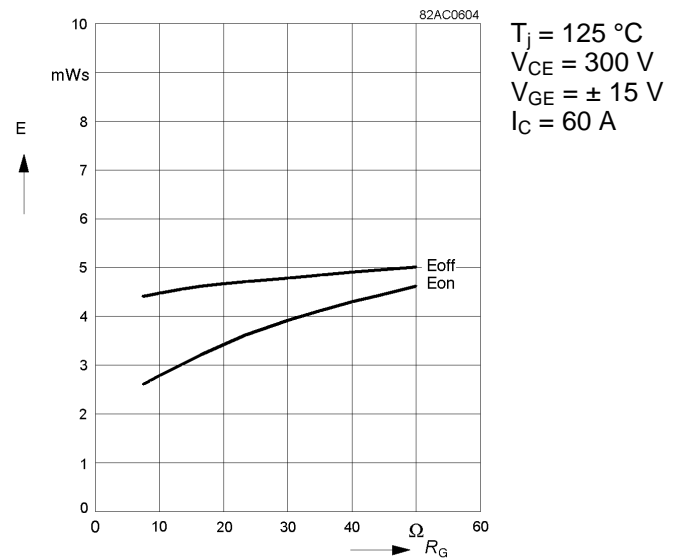


Fig. 4 Turn-on /-off energy = $f(R_G)$

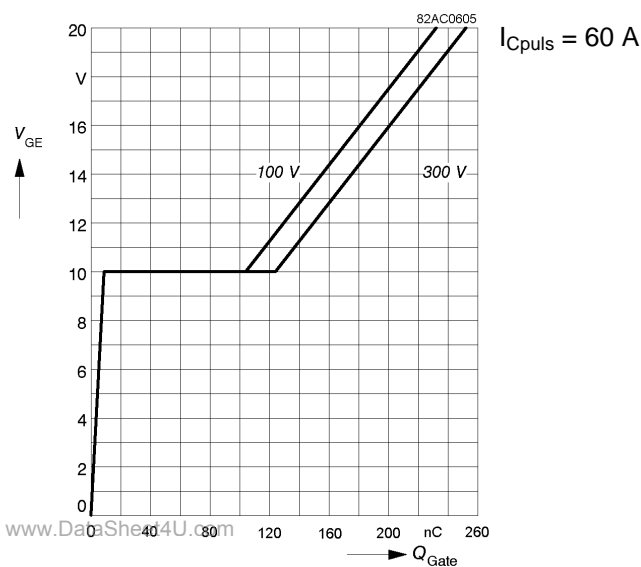


Fig. 5 Typ. gate charge characteristic

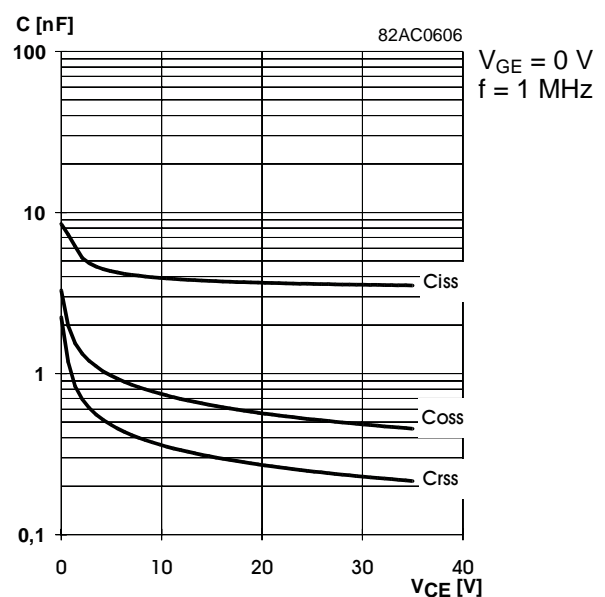


Fig. 6 Typ. capacitances vs. V_{CE}

2. Common characteristics of MiniSKiiP

MiniSKiiP 600 V

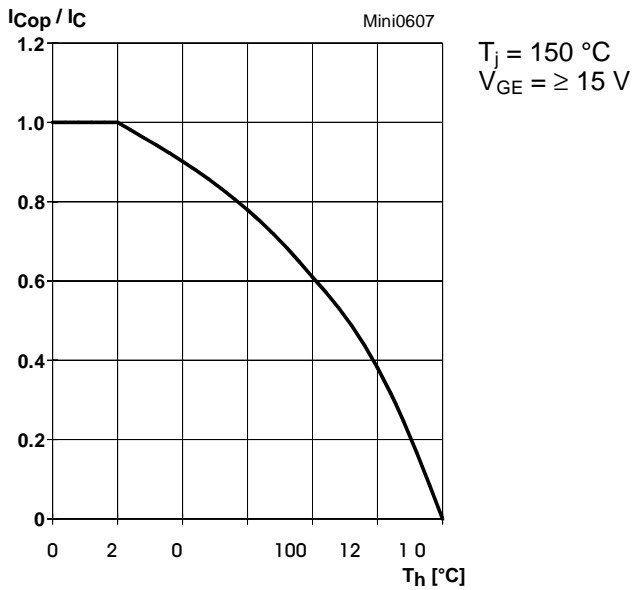


Fig. 7 Rated current of the IGBT $I_{COP} / I_C = f(T_h)$

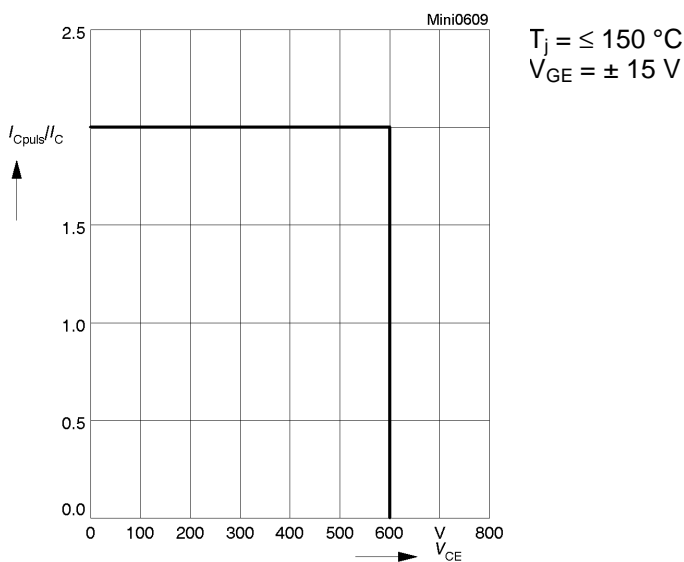


Fig. 9 Turn-off safe operating area (RBSOA) of the IGBT

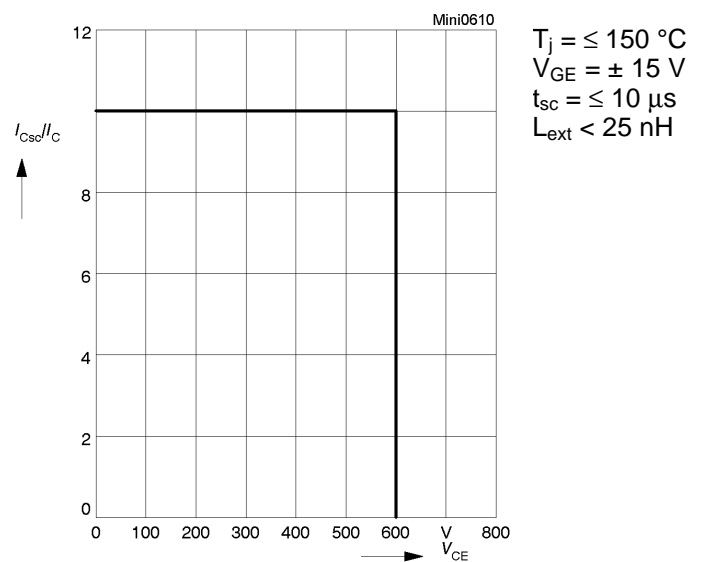


Fig. 10 Safe operating area at short circuit of the IGBT

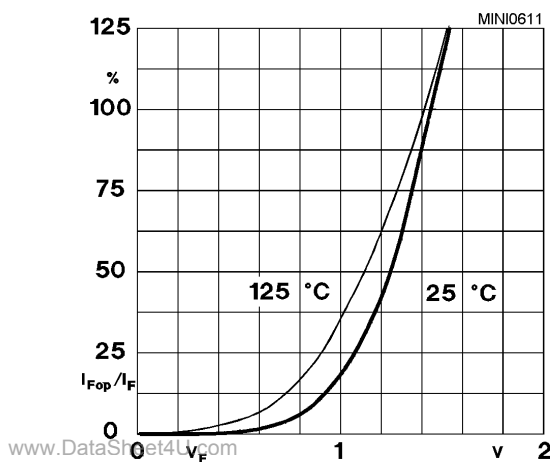


Fig. 11 Typ. freewheeling diode forward characteristic

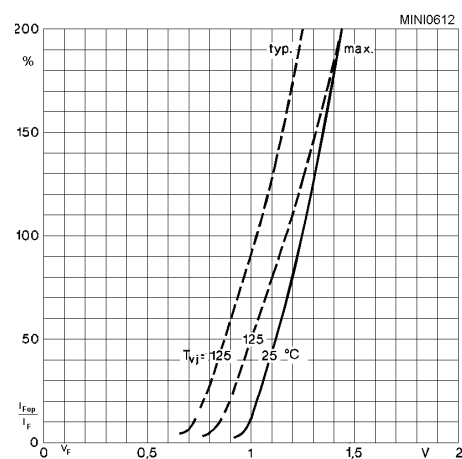


Fig. 12 Forward characteristic of the input bridge diode



MiniSKiiP 8

Inverter part

- SKiiP 82 AC 06 ...
- SKiiP 83 AC 06 ...
- SKiiP 81 AC 12 ...
- SKiiP 82 AC 12 ...
- SKiiP 83 AC 12 ...

Circuit
Case M8


Note: The current sensors are available only by option I

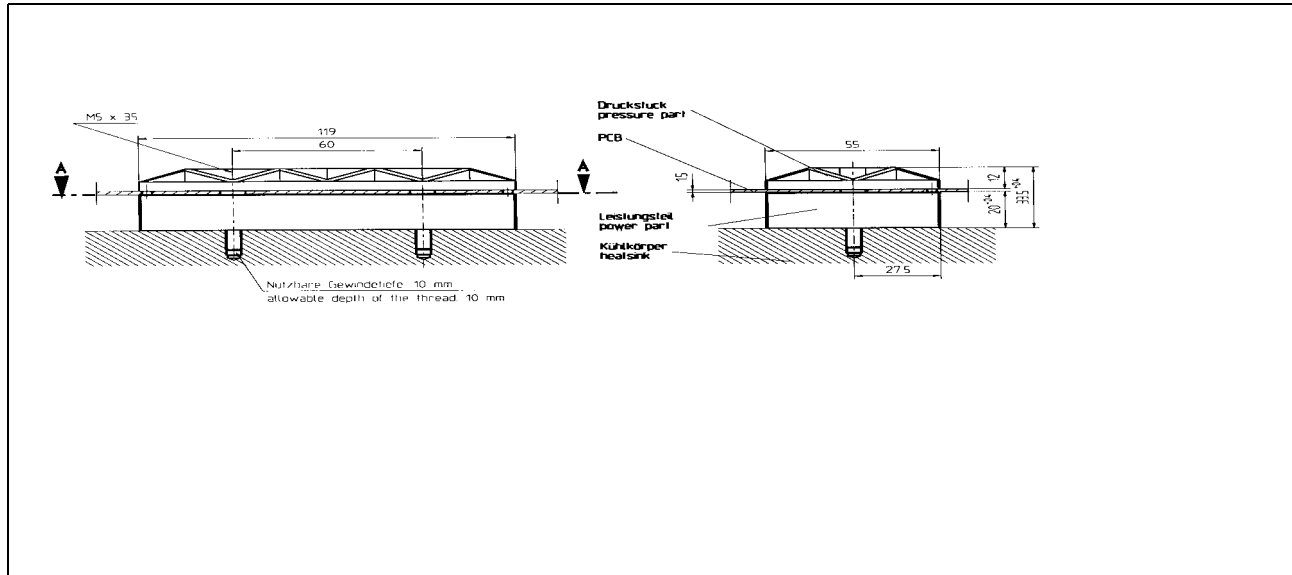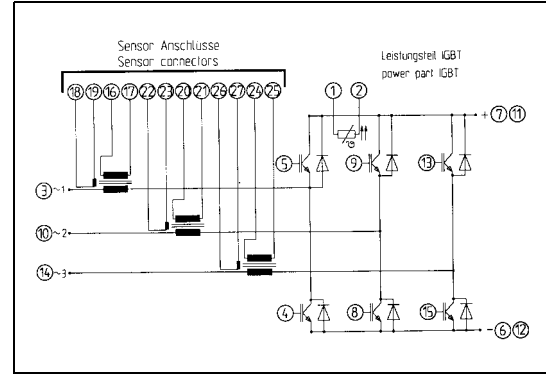

MiniSKiiP 8

Inverter part

- SKiiP 82 AC 06 ... Case M8
- SKiiP 83 AC 06 ... Layout and connections for the
- SKiiP 81 AC 12 ... customer's printed circuit board
- SKiiP 82 AC 12 ...
- SKiiP 83 AC 12 ...

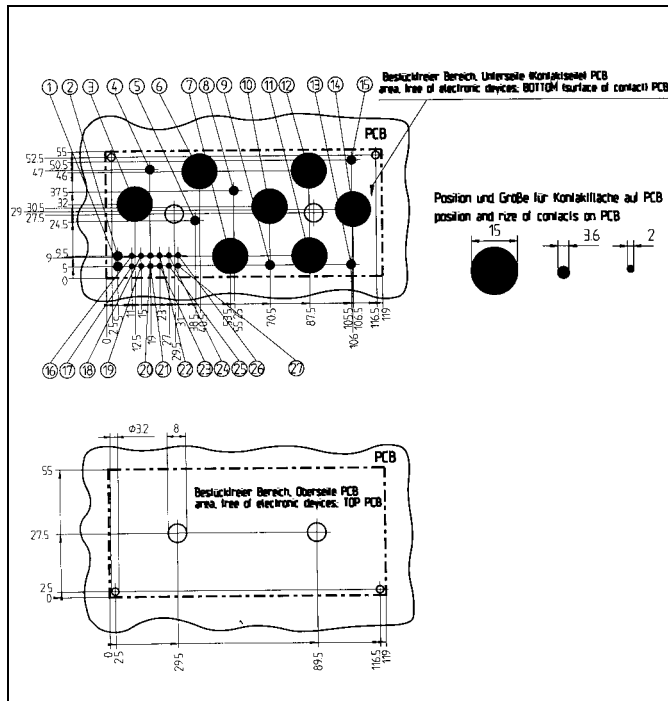

pin	connection	optional
1	T +	
2	T -	
3	~1 ET1 CB1	
4	GB1	
5	GT1	
6	- EB1 EB2 EB3	
7	+ CT1 CT2 CT3	
8	GB2	
9	GT2	
10	~2 ET2 CB2	
11	+ CT1 CT2 CT3	
12	- EB1 EB2 EB3	
13	GT3	
14	~3 ET3 CB3	
15	GB3	
16	K1 for ~1	X
17	K2 for ~1	X
18	S1 for ~1	X
19	S2 for ~1	X
20	K1 for ~2	X
21	K2 for ~2	X
22	S1 for ~2	X
23	S2 for ~2	X
24	K1 for ~3	X
25	K2 for ~3	X
26	S1 for ~3	X
27	S2 for ~3	X