


**MECHANICAL DATA**

Dimensions in mm (inches)

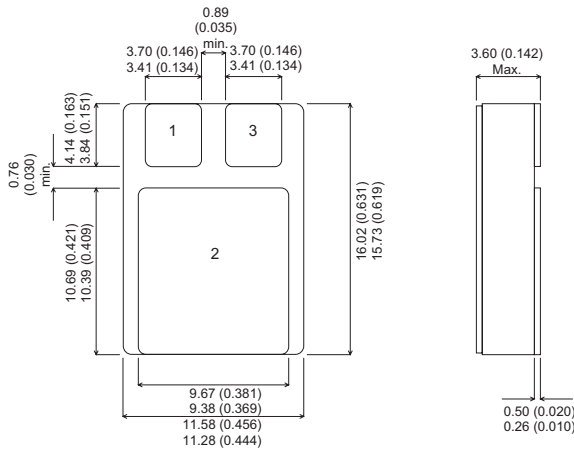

**COMMON CATHODE  
SCHOTTKY DIODE IN  
HERMETIC CERAMIC  
SURFACE MOUNT PACKAGE  
FOR HIGH RELIABILITY  
APPLICATIONS**

**PACKAGE SMD1 (TO-276AB)**

**Underside View**

PAD 1 — Anode 1 PAD 2 — Cathode PAD 3 — Anode 2

**ABSOLUTE MAXIMUM RATINGS** ( $T_C = 25^\circ\text{C}$  unless otherwise stated)

$V_{RRM}$	Repetitive Peak Reverse Voltage	150V
$I_{FAV}$	Average Forward Current $T_C = 25^\circ\text{C}$	23A
	$T_C = 90^\circ\text{C}$	17A
$I_{FSM}$	Maximum source forward current $T_{vj} = 45^\circ\text{C}; t_p = 10\text{ms}$ (50Hz), sine	30A
$T_{vj}$	Virtual Junction Temperature	-55 + 175°C
$T_{stg}$	Storage Temperature	-55 + 150°C
$P_{tot}$	$T_C = 25^\circ\text{C}$	60W
$R_{thjc}$	Thermal Characteristics	2°C/W

**ELECTRICAL CHARACTERISTICS** ( $T_A = 25^\circ\text{C}$  unless otherwise stated)

Parameter	Test Conditions	Min.	Typ.	Max.	Unit
$I_R^*$	$T_{VJ} = 25^\circ\text{C}$ $V_R = V_{RRM}$			2.0	mA
	$T_{VJ} = 125^\circ\text{C}$ $V_R = V_{RRM}$		2.0		
$V_F^*$	$I_F = 7.5\text{A}$ $T_{VJ} = 125^\circ\text{C}$	0.8			V
	$I_F = 7.5\text{A}$ $T_{VJ} = 25^\circ\text{C}$	0.8		1.0	
$C_J$	$V_R = 100\text{V}$ $T_{VJ} = 125^\circ\text{C}$	33			pF

Semelab Plc reserves the right to change test conditions, parameter limits and package dimensions without notice. Information furnished by Semelab is believed to be both accurate and reliable at the time of going to press. However Semelab assumes no responsibility for any errors or omissions discovered in its use. Semelab encourages customers to verify that datasheets are current before placing orders.

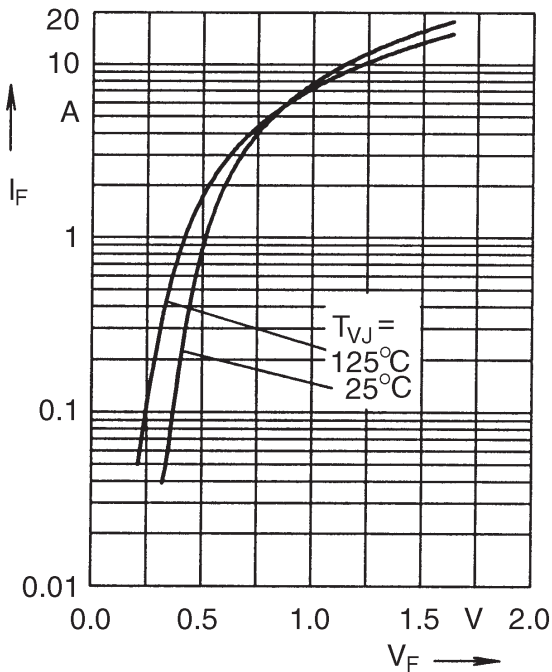


FIG. 1 TYP. FORWARD CHARACTERISTICS

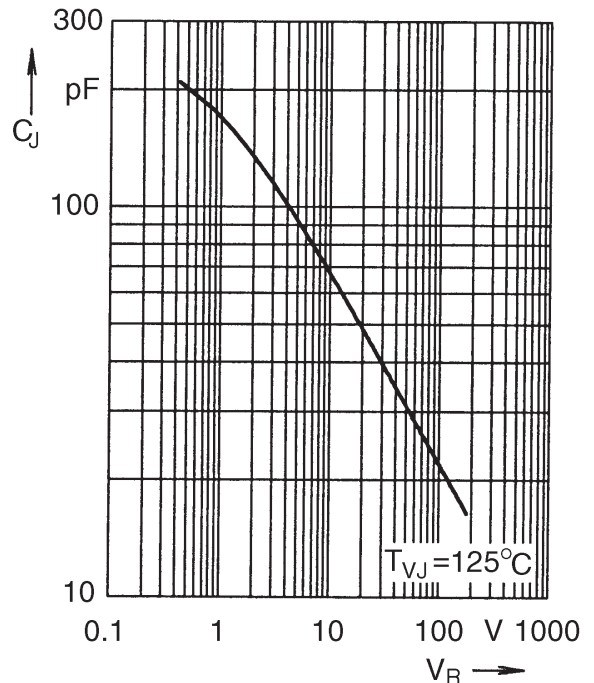


FIG. 2 TYP. JUNCTION CAPACITY VERSUS BLOCKING VOLTAGE

**NOTE:**

Explanatory comparison for the basic operational behaviour of rectifier diodes and Gallium Arsenide Schottky diodes.

	Rectifier Diode	GaAs Schottky Diodoe
Conduction	by majority + minority carriers	by majority carriers only
forward characteristics	$V_F(I_F)$	$V_F(I_F)$ , See Fig 1
turn off characteristics	extraction of excess carriers causes temperature dependant reverse recovery ( $t_{rr}$ , $I_{RM}$ , $Q_{rr}$ )	reverse current charges junction capacity $C_j$ , see Fig 2;
turn on characteristics	delayed saturation leads to $V_{FR}$	not temperature dependant no turn on overvoltage peak.

Semelab Plc reserves the right to change test conditions, parameter limits and package dimensions without notice. Information furnished by Semelab is believed to be both accurate and reliable at the time of going to press. However Semelab assumes no responsibility for any errors or omissions discovered in its use. Semelab encourages customers to verify that datasheets are current before placing orders.