



Tape Sealed SIP Sockets

Tape Seal available on all sockets.



Features:

- Removable tape seal protects plated contact in harsh environments.
- Sealed socket will not allow dirt and other contaminants to enter socket chamber and become entrapped behind contact fingers.
- Spray flux without contaminating contact area.
- When ordering add 3M to end of part number.
- See SIP pages 42 - 47 for additional material and dimensional information.

Terminals and Contacts:

Terminal: Brass - Copper Alloy 360, ASTM-B-16

Contact: Beryllium Copper - Copper Alloy 172, ASTM-B-194

Plating:

Terminal: Gold over Nickel or Tin-Lead over Nickel

Contact: Gold over Nickel or Tin-Lead over Nickel

Body Material:










SS/LSS/NB/LNB - Glass filled thermoplastic Polyester (P.B.T.)
U.L. Rated 94V-O, -60°C to 140°C (-76°F to 284°F)

KSS - Polyimide Film Temp. range -269°C to 400°C (-452°F to 752°F)

Tape Seal::


Silicone Backed Polyimide Film,
-74°C to 260°C (-100°F to 500°F)
Intermittent to 371°C (700°F)

Terminal Information



Quick turn delivery available on standard terminal types.
Additional terminal types available.
See terminal section for detailed terminal information.

How To Order

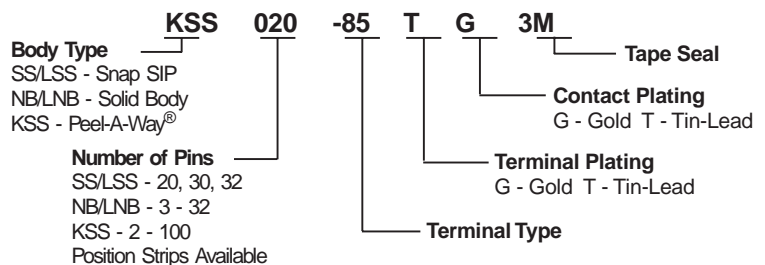

Single In-Line