

Power Cord with IEC Appliance Plug C, straight, 70°C

new



C

 70° C

**Description**

Interconnection Cord, Protection class II, Pin temperature 70 °C, Cable

Approvals

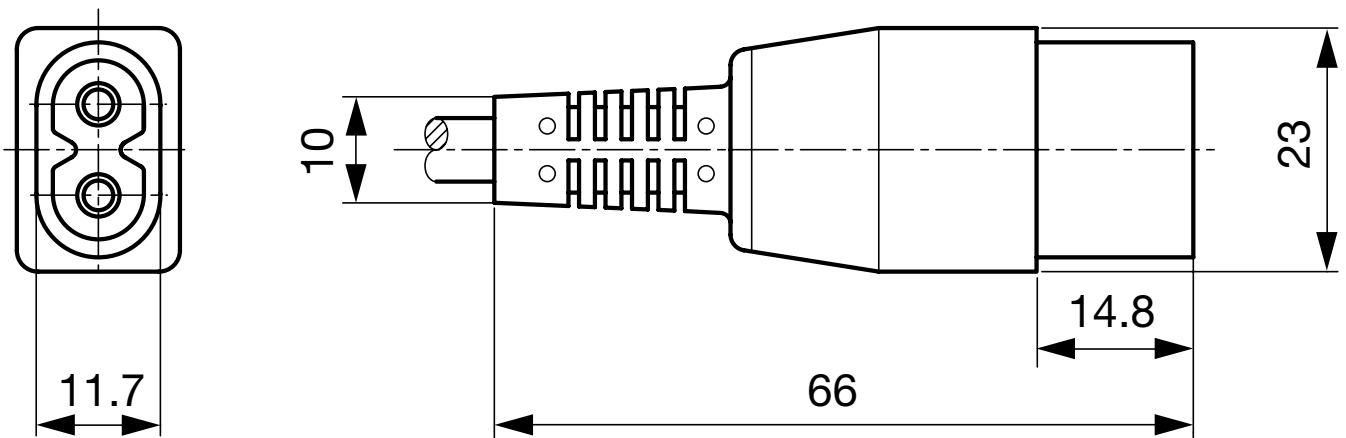
- VDE License Number: 40005801
- UL License Number: E45116
- CSA License Number: 1020530

Weblinks

[Approvals](#), [RoHS](#), [CHINA-RoHS](#), [e-Store](#), [SCHURTER-Stock-Check](#),
[Distributor-Stock-Check](#), [Product Configurator](#)

Technical Data

Ratings IEC	2.5 A / 250 VAC; 50 Hz	Appliance-Inlet/-Outlet	C acc. to IEC/EN 60320-1
Ratings UL/CSA	2.5 A / 250 VAC; 60 Hz		UL 498, CSA C22.2 no. 42 (for cold conditions) pin-temperature 70 °C, 2.5 A, Protection class II
Dielectric Strength	> 2 kVDC between L-N > 2 kVAC between L/N-PE (1 min/50 Hz)		
Allowable Operation Temp.	-25 °C to 70 °C		
Degree of Protection	from front side IP 20 acc. to IEC 60529		
Protection Class	Suitable for appliances with protection class II acc. to IEC 61140		
Terminal	moulded		
Material: Housing	black or grey		

DimensionsLength  23 mm

Order Code

Product Configurator

2730 - R - Type - D - Length

The characters are placeholders for the correspondingly keys of selections from the key tables.
Typ steht für die Dose bzw. 2. Seite, Länge ist die Leitungslänge in mm.

2730 - R - Type - D - Length = corde type

corde type	Configuration key
H03VV-F 2x0,75mm ²	A
H03VWH2-F 2x0,75mm ²	B
H05VV-F 2x0,75mm ²	D
H05VWH2-F 2x0,75mm ²	E
SVT 2x18AWG	M
special cord	Z

General Product Information see page XXX

2730 - R - Type - D - Length = cord end 2

cord end 2
zzzz, 2510, 2511, 4810

2730 - R - Type - D - Length = Color

Color	Configuration key
jet black; RAL9005	A
silver grey; RAL7001	B
Standard color: black	

2730 - R - Type - D - Length = Leitungslänge

Leitungslänge
zzzz, 000500, 001000, 001500, 002000, 002500, 003000, 005000
cord length in mm

Mating Outlets/Connectors

Category / Description



Appliance Outlet

IEC appliance outlet D, snap-in mounting, front side, solder terminal	5083
IEC appliance outlet D, screw-on mounting, front side, solder terminal	5088



Connector

IEC appliance outlet D, screw-on mounting, front side, solder terminal	5084
IEC appliance outlet D, insert mounting, solder terminal	5086



Power Supply or Interconnection Cord

Power Cord with IEC Appliance Plug C7, straight 70°C	2510
Power Cord with IEC Appliance Plug C7, angled, 70°C	2511
Power Cord with IEC Appliance Plug C7, angled, 70°C	2514
Power Cord with IEC Appliance Plug C7, straight 70°C	4810