
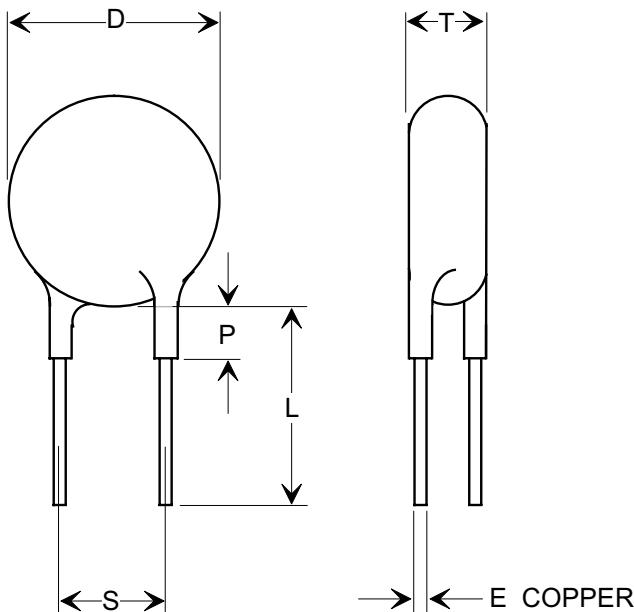


This drawing is the property of
Tusonix, Inc., and may not be
used, reproduced, published or
disclosed to others without ex-
pressed authorization by Tusonix Inc.

Electrical Testing
per Tusonix standard
test plans and Mil-Std-202
Test Methods.

MARKETING SALES DRAWING
DIMENSIONS IN INCHES - DO NOT SCALE THIS DRAWING
DIMENSIONS IN METRIC - []



SPECIFICATIONS

D (Diameter):		.360 [9.14] MAX.
T (Thickness):		.156 [3.96] MAX.
S (Lead Wire Spacing):		.250 ±.031 [6.35 ±0.79]
L (Lead Wire Length):		1.5 [38.10] MIN.
E (Lead Wire Diameter):		.025 [0.63] (# 22 AWG.)
P (Coating on Leads Max.):		.125 [3.17]
Capacitance Value:		10,000 pF
Capacitance Tolerance:		+80, -20%
Temperature Coefficient:		Z5V
Voltage:	Working:	500 VDC
	Test:	1500 VDC
	Life:	1000 VDC

Marking: TMK, CAP, TOL. & T.C.

NOTES:

1. TUSONIX STANDARD PART
NUMBER: 801-000-Z5V0-103Z
TUSONIX RoHS COMPLIANT PART
NUMBER: 801-000-Z5V0-103Z LF
CUSTOMER MUST SPECIFY STANDARD
OR RoHS PART NUMBER WHEN
ORDERING.
2. LEAD FINISH: STANDARD PART #:
60/40 SOLDER PLATED. RoHS PART #:
100% TIN PLATED.
3. PART MARKING: TMK, CAP, TOL, T.C. &
WVDC.
STANDARD PART: WHITE INK.
RoHS PART: WHITE INK AND GREEN
STRIPE IDENTIFIER.
4. CONFORMAL COATING IS PHENOLIC
RESIN (DUREZ) WITH WAX
IMPREGNATION.

REVISION RECORD Original Release C.O. 19980604-7-01 DRAWING WAS 801-000-Z5U0- 103Z. S.M. 06-29-06 20060629-4-01	0	1		--TOLERANCES-- Unless Otherwise Specified	Title DISC CAPACITOR	
				DECIMAL ±	Drawn S.M. 06-29-06	
				ANGLES ±	Approved B.Mc. 06-29-06	
				TUSONIX TUCSON, ARIZONA	A	801-000-Z5V0-103Z