

# fischer connectors

*4032 Series*  
Plastic connectors



*MEDICAL*



*PORTABLE  
EQUIPMENT*



*DATA  
ACQUISITION*




*INSTRUMENTATION*

*HIGH-PERFORMANCE IN A  
VERSATILE PACKAGE*





PERFECT PACKAGE

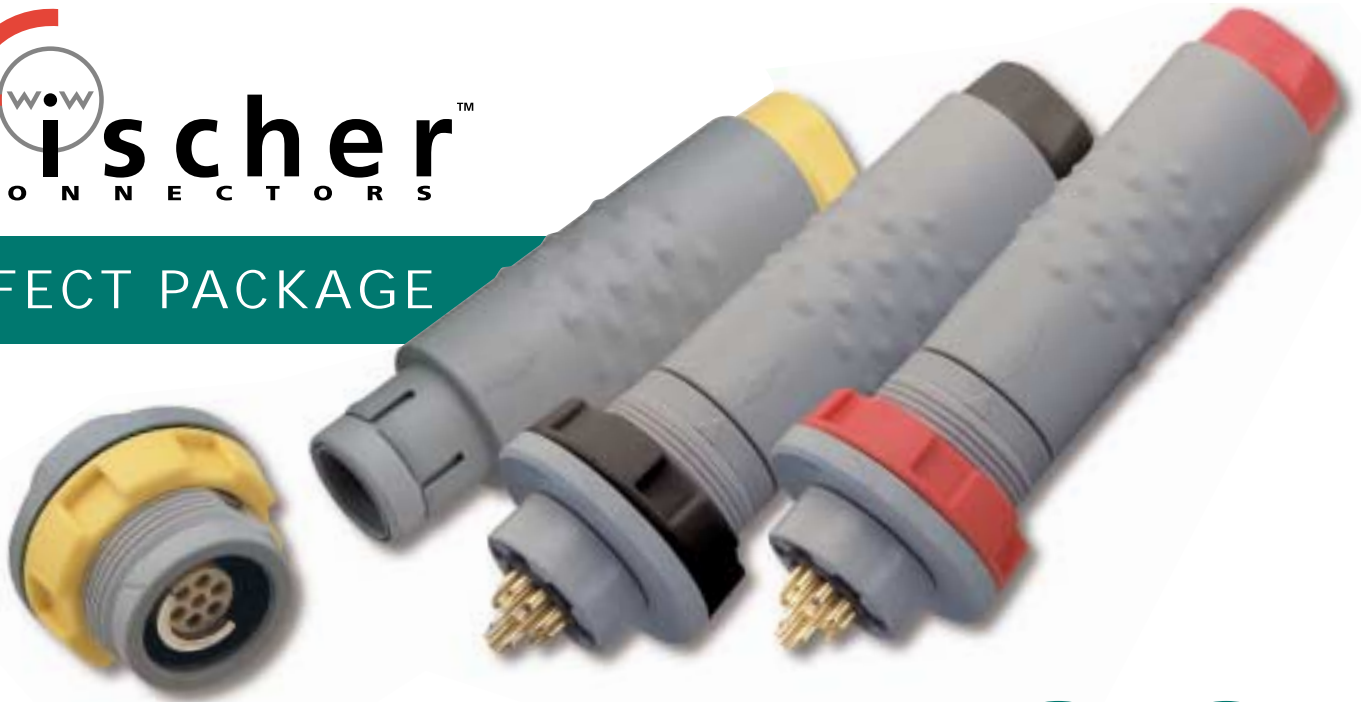

S E R I E S 4032

FEATURES


- 2 - 19 contacts . . . . . High signal density
- 14.5 mm diameter plug . . . . . Ideal for miniature equipment
- Gold-plated contacts (greater than 1 µm) . . . . . Highly reliable signal path
- Greater than 5000 mating cycles . . . . . Minimizes end product warranty claims
- IP68 sealing available (submersible) . . . . . Ideal for exterior applications
- 60% lighter than equivalent metal models . . . . . Minimizes total product weight
- Fischer®-pioneered keying system . . . . . Facilitates easy operation and eliminates contact damage
- Insulated construction . . . . . Ideal for IEC 60601-1 applications
- Disposable versions available . . . . . High reliability for cost-sensitive applications
- SureGrip™ plastic housing . . . . . Promotes user and patient safety
- Color keying . . . . . Easy identification of multiple connectors

BENEFITS

APPLICATIONS

- ▶ Disposable medical equipment
- ▶ Hand-held instrumentation
- ▶ Data acquisition equipment
- ▶ Surgical hand tools
- ▶ Bar code readers
- ▶ Medical catheters
- ▶ Portable field equipment
- ▶ Meteorological instrumentation
- ▶ Patient-worn medical devices
- ▶ Diagnostic equipment
- ▶ Marine applications
- ▶ Entertainment equipment

# Connectors and Accessories

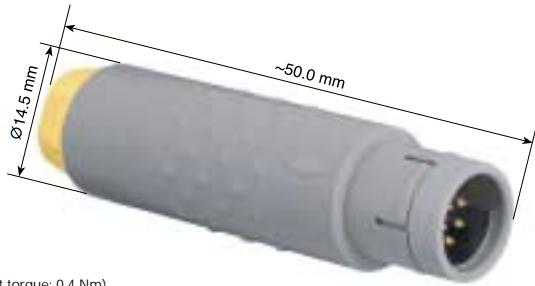


(Max. cap nut torque: 0.4 Nm)  
All dimensions shown are in millimeters and are for reference only



IP65 or IP68  
Rated

## SI

- Cable Plug
- Sealed to IP65 or IP68
- Color-coded back nut permits easy identification
- Accepts cable diameters 2.2 – 6.7 mm (0.09 – 0.26 in.)
- See cable clamps on page 5





(Max. mounting nut torque: 1.0 Nm)

## DBP

- Chassis Receptacle
- Sealed to IP65 when mated
- Color-coded mounting nut permits easy identification

IP65  
Rated




(Max. mounting nut torque: 1.0 Nm)

## DBPO

- Same as DBP, except with sealing to panel and mating plug
- Sealed to IP68 when mated
- Color-coded mounting nut permits easy identification

IP68  
Rated



## Sealing Cap - Plug

Part Number: 4032.703

- Integral o-ring seals and protects plug when unmated
- Supplied with 150 mm PTFE coated stainless steel lanyard and hardware
- Material: POM (Delrin®)



## Sealing Cap - Receptacle

Part Number: 4032.701

- Integral o-ring seals and protects receptacle when unmated
- Supplied with 150 mm PTFE coated stainless steel lanyard and hardware
- Material: POM (Delrin®)












## Nut Driver

Part Number: TH00.001

- Use for easy assembly of DBP and DBPO to panel

## Standard Contact Configurations

Designation	Number of Contacts	Test Voltage <sup>1</sup> (kVAC)	Maximum Current <sup>2</sup> per Contact (A)		Contact Diameter	Wire Barrel Diameter	AWG	Insulator Material	Available Contact Styles <sup>3</sup>
			20°C	40°C					
4032 A051 4032 Z051	 2	2.2	10	14.1	1.3	1.2	20	PEEK	J, L
4032 A052 4032 Z052	 3	1.5	8.9	12.6	1.3	1.2	20	PEEK	J, L
4032 A053 4032 Z053	 4	1.6	4.6	6.5	0.9	0.8	22	PEEK	J, L
4032 A054 4032 Z054	 5	1.4	4.4	6.2	0.9	0.8	22	PEEK	J, K, L
4032 A056 4032 Z056	 6	1.3	3.3	4.6	0.7	0.6	26	PEEK	J, K, L
4032 A057 4032 Z057	 7	1.3	3.3	4.6	0.7	0.6	26	PEEK	J, K, L
4032 A010 4032 Z010	 10	1.5	2.3	3.3	0.7	0.6	26	PEEK	J, K, L
4032 A012 4032 Z012	 12	1.5	2.2	3.2	0.7	0.6	26	PEEK	J, K, L
4032 A019 4032 Z019	 19	0.9	1.0	1.5	0.5	0.4	28	PEEK	J, K, L

<sup>1</sup> per IEC 512-2, 4a

<sup>2</sup> per IEC 512-3, 5a

<sup>3</sup> J = Solder; K = Crimp; L = PCB

## Materials

Component	Material	Plating
Bodies, Cap Nut, Mounting Nut	PBT	-
Metal Parts (except contacts)	Brass	3 µm Nickel <sup>5</sup>
Contacts	Solder: Male: Brass Female: Bronze Crimp: Male: Bronze Female: Bronze	Minimum 1 µm Gold <sup>4</sup> on 4 µm Nickel <sup>5</sup>
Contact Block	PEEK	-
O-rings	NBR	-
Plastic Cable Clamps	POM (Delrin®)	-

<sup>4</sup> per AMS2422D or ASTM B488


<sup>5</sup> similar to MIL-C26074E

## Performance

Operating Temperature Range	-65°C to +135°C
Mechanical Endurance	5000 mating cycles
Radiation Resistance	10 <sup>8</sup> Rad
Autoclaveability	Maximum of 50 cycles

# Part Numbers

## Connectors

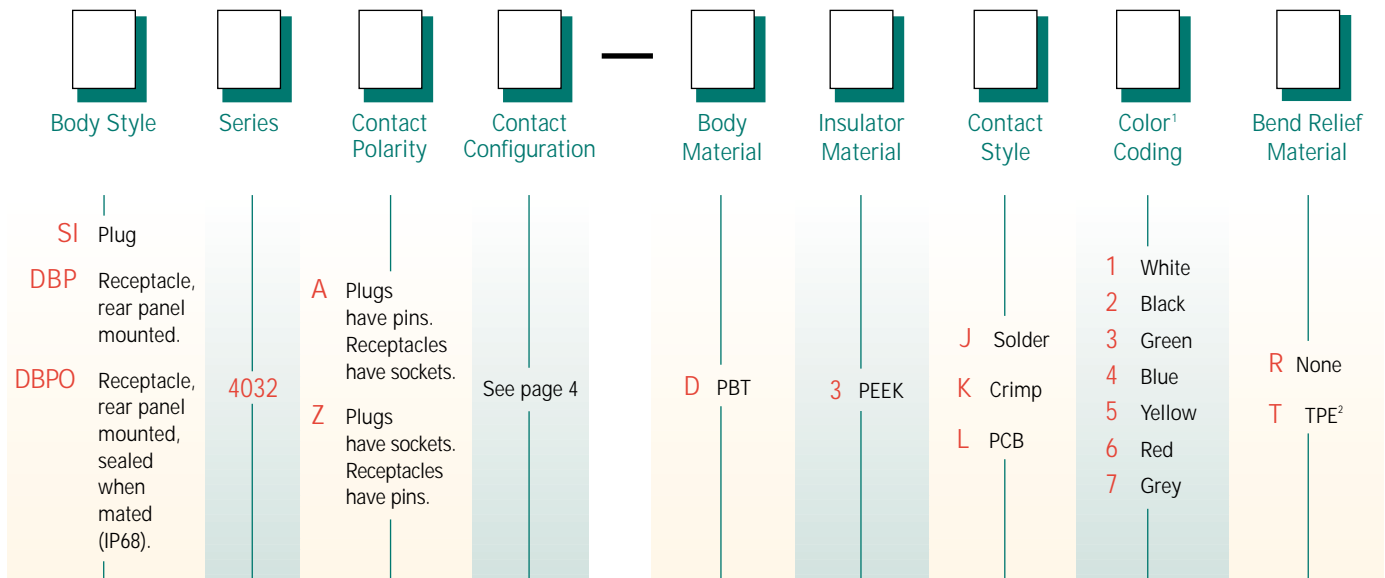

<sup>1</sup> Plug: Cap nut  
Receptacle: Mounting nut

<sup>2</sup> Future availability

## Cable Clamps

Plastic <sup>3</sup>	
Cable O.D. (mm)	Part Number
2.2 – 3.7	4032.1003
3.7 – 5.2	4032.1002
5.2 – 6.7	4032.1001

<sup>3</sup>For unshielded applications

Sealed <sup>4</sup>	
Cable O.D. (mm)	Part Number
2.2 – 2.7	E3 1031.2/2.7
2.7 – 3.2	E3 1031.2/3.2
3.2 – 3.7	E3 1031.2/3.7
3.7 – 4.2	E3 1031.2/4.2
4.2 – 4.7	E3 1031.2/4.7
4.7 – 5.2	E3 1031.2/5.2
5.2 – 5.7	E3 1031.2/5.7
5.7 – 6.2	E3 1031.2/6.2
6.2 – 6.7	E3 1031.2/6.7

<sup>4</sup>For use when sealing shielded or unshielded cable to plug body



## Headquarters

### FISCHER CONNECTORS SA

Ch. du Glapin 20  
CH-1162 Saint-Prex  
Phone +41 21 800 95 95  
Fax +41 21 800 39 24  
**Appel gratuit: 0 800 800 008**  
www.fischerconnectors.ch  
mail@fischerconnectors.ch

## • Subsidiaries

### America: North, Central and South

**FISCHER CONNECTORS Inc.**  
**Atlanta**  
Phone +1 678 393 5400  
Fax +1 678 393 5401  
**Toll free: 800 551 0121**  
www.fischerconnectors.com  
mail@fischerconnectors.com

### Asia

**FISCHER CONNECTORS ASIA Ltd.**  
**Hong Kong**  
Phone +852 2268 6837  
Fax +852 2268 6729  
www.fischerconnectors.hk  
mail@fischerconnectors.hk

### France

**FISCHER CONNECTORS Sarl**  
**Paris**  
Phone +33 1 5578 2578  
Fax +33 1 5578 2575  
**Appel gratuit: 0 800 590 444**  
www.fischerconnectors.fr  
mail@fischerconnectors.fr

### Germany and Eastern Europe

**FISCHER CONNECTORS GmbH**  
**Kirchseeon-Eglharting**  
Phone +49 8091 5583 0  
Fax +49 8091 5583 23  
**Gebührenfrei: 0 800 233 3233**  
www.fischerconnectors.de  
mail@fischerconnectors.de

### Italy

**FISCHER CONNECTORS Srl**  
**Monza**  
Phone +39 039 734 072  
Fax +39 039 749 465  
www.fischerconnectors.it  
mail@fischerconnectors.it

### Sweden and Finland

**FISCHER CONNECTORS AB**  
**Billdal**  
Phone +46 31 910 420  
Fax +46 31 912 380  
www.fischerconnectors.se  
mail@fischerconnectors.se

### United Kingdom, Ireland and India

**FISCHER CONNECTORS Ltd.**  
**Havant/Hampshire**  
PO9 5TL  
Phone +44 2392 459 600  
Fax +44 2392 459 601  
**Toll free: 0 800 432 0301**  
www.fischerconnectors.co.uk  
sales@fischerconnectors.co.uk

## • Distributors

### Australia / New Zealand

SOANAR (Pty) Ltd.  
3136 Croydon, Victoria  
Phone +61 3 9724 0888  
Fax +61 3 9724 0878  
info@soanar.com

### Austria

FISCHER ELEKTRONIK GmbH  
1130 Wien  
Phone +43 1 876 6227  
Fax +43 1 876 6227 11  
online@fischerelektronik.co.at

### Belgium

GIVATEC BVBA  
3001 Heverlee  
Phone +32 16 400 500  
Fax +32 16 401 010  
sales@givatec.com

### Canada

MATRIX TECHNOLOGY Ltd.  
Markham, Ontario L3R 3W7  
Phone +1 905 477 4442  
Fax +1 905 477 3606  
matrix@fischerconnectors.com

### Denmark

ROSENBERGER DANMARK a/s  
3460 Birkerød  
Phone +45 4582 1294  
Fax +45 4582 1395  
reception@rosenberger.dk

### Israel

C.V.S. TECHNOLOGIES 1974 Ltd.  
Tel-Aviv 69710  
Phone +972 3648 7475  
Fax +972 3647 4379  
sales@cvs.co.il

### Japan

K. TOKIWA & Co. Inc.  
KDX Ohmori Building  
Ohta-Ku, Tokyo 143  
Phone +81 3 3766 6701  
Fax +81 3 3766 1300  
tkw-shoko@k-tokiwa.co.jp

### Netherlands

AVT INDUSTRIAL COMPONENTS  
5657 EE Eindhoven  
Phone +31 40 20 88 088  
Fax +31 40 20 88 099  
sales@avtic.com

### Norway

T&G ELEKTRO A/S  
1321 Stabekk  
Phone +47 67 129 050  
Fax +47 67 129 060  
epost@tgelektro.no

### Singapore

COASTAL ELECTRONICS Pte Ltd.  
Singapore 188504  
Phone +65 6 338 3076  
Fax +65 6 339 5185  
coastal.elect@pacific.net.sg

### South Africa

SUNTRONIKA (Pty) Ltd.  
2001 Braamfontein/Johannesburg  
Phone +27 11 403 3420  
Fax +27 11 403 4050  
salesupp@suntronika.com

### Spain

SUMINISTROS DE CONECTORES PROFESIONALES SA  
28028 Madrid  
Phone +34 91 355 6006  
Fax +34 91 356 9525  
compras@scp-sa.es