

SPECIFICATIONS

Mechanical

Contact Engagement Force: 0.34kg (0.75Lb) max.

Contact Separation Force: 0.021kg (0.05Lb) min.

Durability: 500 Cycles

Electrical

Current Rating: 2A

Contact Resistance: 25mW max.

Dielectric Withstanding Voltage: 1000V AC/1min min.

Insulation Resistance: 5000MW min.

Physical

Housing: Thermoplastic, UL 94V-0 rated in Blue 661C Color

Contact: Copper alloy

Plating: See "ORDERING INFORMATION"

Operating Temperature: -20 to +85

Recommended Thickness of PCB: 1.57[.062]


VGA Connector

DZ Series


Right Angle Type, T/H

2.29mm [.090"] Pitch

15 Pos.

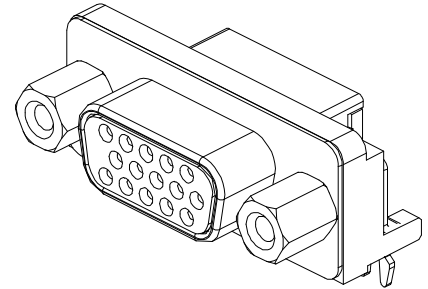

DRAWING

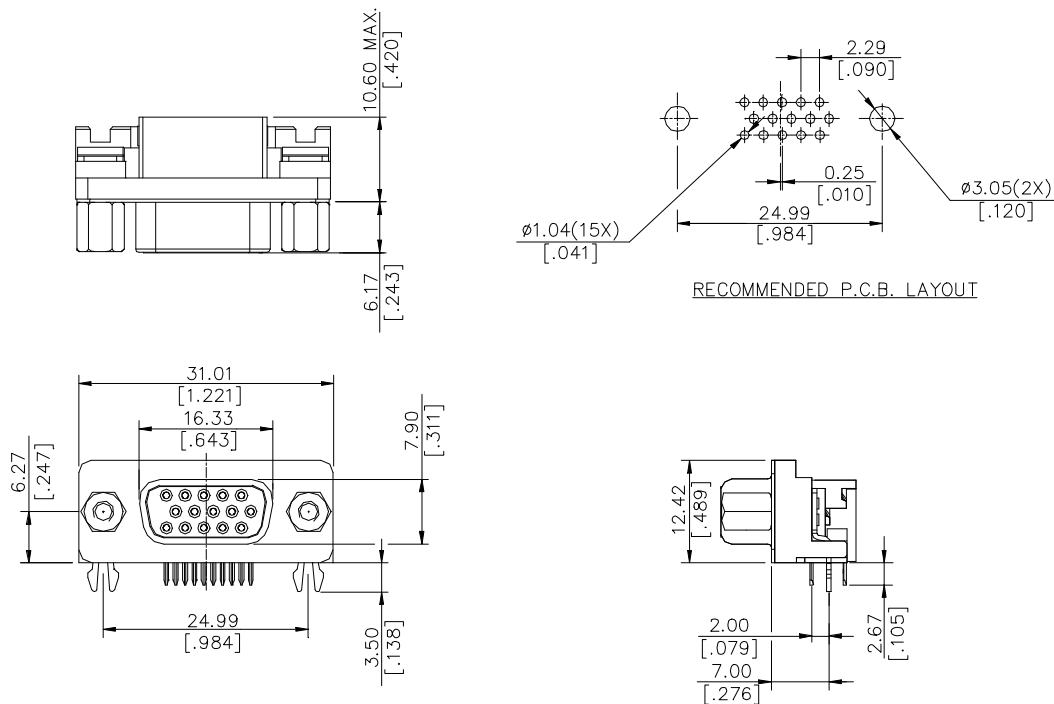

ORDERING INFORMATION

PRODUCT NO.: DZ 1 1 A 3 * - D5N7 - 4F

VGA Series	Lead Free Part Number
Body Type	Extension Code
1=Right Angle PCB Mount	
Termination Type	Contact Area Plating
1=Female	1=Gold Flash
NO. of Pos.	2=20u" Gold
A=H/D 15 Pos.	3=30u" Gold
Body Length	7=15u" Gold
3=7.0	