

MAZ7000 Series (MA7000 Series)

Silicon planar type

For stabilization of power supply

■ Features


- Large power dissipation P_{tot} (800 mW)
- Allowing to supply with the radial taping

■ Absolute Maximum Ratings $T_a = 25^\circ\text{C}$

Parameter	Symbol	Rating	Unit
Repetitive peak forward current	I_{FRM}	200	mA
Total power dissipation*1	P_{tot}	800	W
Non-repetitive reverse surge power dissipation*2	P_{ZSM}	60	W
Junction temperature	T_j	200	$^\circ\text{C}$
Storage temperature	T_{stg}	-55 to +200	$^\circ\text{C}$

Note) *1 : $P_{tot} = 800$ mW achieved with a printed-circuit board

*2 : $t = 100$ μs , $T_j = 150^\circ\text{C}$

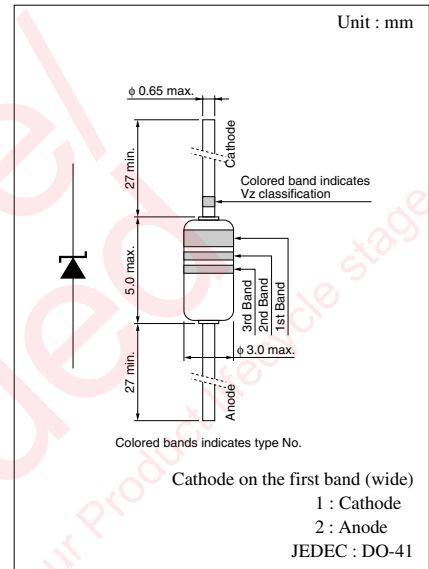

• Color indication of V_Z rank classification

A rank	B rank
Blue	Red

■ Common Electrical Characteristics $T_a = 25^\circ\text{C}$ *1

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Forward voltage	V_F	$I_F = 200$ mA			1.0	V
Zener voltage*2	V_Z	I_Z Specified value				V
Operating resistance	R_Z	I_Z Specified value				Ω
Reverse current	I_R	V_R Specified value				μA
Temperature coefficient of zener voltage*3	S_Z	I_Z Specified value				mV/ $^\circ\text{C}$
Terminal capacitance	C_t	V_R Specified value				pF

Refer to the list of the electrical characteristics within part numbers

Note) 1. Rated input/output frequency: 5 MHz

2. *1 : The V_Z value is for the temperature of 25°C . In other cases, carry out the temperature compensation.

*2 : Guaranteed at 20 ms after power application.

*3 : $T_j = 25^\circ\text{C}$ to 150°C

Note) The part number in the parenthesis shows conventional part number.


Zener Diodes

■ Electrical characteristics within part numbers $T_a = 25^\circ\text{C}$







Part Number	Zener voltage			Reverse current		Operating resistance		Temperature coefficient of zener voltage		Terminal capacitance	Marking Symbol (Color indication)		
	Min (V)	Max (V)	I_Z (mA)	Max (μA)	V_R (V)	Max (Ω)	I_Z (mA)	Typ (mV/ $^\circ\text{C}$)	I_Z (mA)	C_t (pF) ($V_R = 0$ V) $f = 1$ MHz Typ			
											1st.	2nd.	3rd.
MAZ7051	4.8	5.4	40	20	1	10	40	0	40	200	Green	Brown	Brown
MAZ7051-A	4.8	5.15											
MAZ7051-B	5.05	5.4											
MAZ7056	5.2	6.0	40	20	2	8	40	1.5	40	180	Green	Blue	Blue
MAZ7056-A	5.3	5.7											
MAZ7056-B	5.6	6.0											
MAZ7062	5.8	6.6	40	20	3	6	40	2.4	40	330	Blue	Red	Red
MAZ7062-A	5.8	6.2											
MAZ7062-B	6.1	6.5											
MAZ7068	6.4	7.2	40	10	3	6	40	3.1	40	280	Blue	Gray	Gray
MAZ7068-A	6.4	6.8											
MAZ7068-B	6.7	7.1											
MAZ7075	7.0	7.9	40	10	3	5	40	3.8	40	250	Purple	Green	Green
MAZ7075-A	7.0	7.45											
MAZ7075-B	7.35	7.8											
MAZ7082	7.7	8.7	40	10	4	5	40	4.5	40	230	Gray	Red	Red
MAZ7082-A	7.7	8.2											
MAZ7082-B	8.1	8.6											
MAZ7091	8.5	9.6	40	10	5	6	40	5.4	40	220	White	Brown	Brown
MAZ7091-A	8.5	9.05											
MAZ7091-B	8.95	9.5											
MAZ7100	9.4	10.6	40	10	7	6	40	6.3	40	220	Brown	Black	—
MAZ7100-A	9.4	10.0											
MAZ7100-B	9.9	10.5											
MAZ7110	10.4	11.6	20	5	7	8	20	7.4	20	160	Brown	Brown	—
MAZ7110-A	10.4	11.05											
MAZ7110-B	10.85	11.5											
MAZ7120	11.4	12.7	20	5	8	8	20	8.4	20	160	Brown	Red	—
MAZ7120-A	11.4	12.1											
MAZ7120-B	11.9	12.6											
MAZ7130	12.4	14.1	20	5	9	10	20	9.4	20	155	Brown	Orange	—
MAZ7130-A	12.4	13.25											
MAZ7130-B	13.15	14.0											
MAZ7150	13.8	15.6	20	5	10	12	20	11.4	20	150	Brown	Green	—
MAZ7150-A	13.8	14.7											
MAZ7150-B	14.5	15.4											
MAZ7160	15.3	17.1	20	5	11	12	20	12.5	20	135	Brown	Blue	—
MAZ7160-A	15.3	16.3											
MAZ7160-B	16.1	17.1											
MAZ7180	16.8	19.1	20	5	12	15	20	14.5	20	110	Brown	Gray	—
MAZ7180-A	16.8	18.0											
MAZ7180-B	17.8	19.0											
MAZ7200	18.8	21.2	20	5	14	15	20	16.6	20	100	Red	Black	—
MAZ7200-A	18.8	20.0											
MAZ7200-B	19.8	21.0											

■ Electrical characteristics within part numbers (continued) $T_a = 25^\circ\text{C}$

Part Number	Zener voltage		Reverse current		Operating resistance		Temperature coefficient of zener voltage		Terminal capacitance	Marking Symbol (Color indication)			
	V_Z		I_R		R_Z		S_Z		C_t (pF)				
	Min (V)	Max (V)	I_Z (mA)	Max (μA)	V_R (V)	Max (Ω)	I_Z (mA)	Typ (mV/ $^\circ\text{C}$)	I_Z (mA)	Typ	($V_R = 0\text{ V}$) $f = 1\text{ MHz}$	1st.	2nd.
MAZ7220	20.8	23.3	10	5	15	20	10	18.6	10	95	Red	Red	—
MAZ7220-A	20.8	22.15											
MAZ7220-B	21.85	23.2											
MAZ7240	22.8	25.6	10	5	16	20	10	20.7	10	90	Red	Yellow	—
MAZ7240-A	22.8	24.35											
MAZ7240-B	24.15	25.6											
MAZ7270	25.1	28.9	10	2	18	25	10	23.8	10	85	Red	Purple	—
MAZ7270-A	25.1	27.0											
MAZ7270-B	26.9	28.9											
MAZ7300	28.0	32.0	10	2	20	25	10	26.9	10	80	Orange	Black	—
MAZ7300-A	28.0	30.1											
MAZ7300-B	29.9	32.0											
MAZ7330	31.0	35.0	10	2	22	30	10	30.0	10	75	Orange	Orange	—
MAZ7330-A	31.0	33.14											
MAZ7330-B	32.86	35.0											
MAZ7360	34.0	38.0	10	2	24	30	10	33.4	10	70	Orange	Blue	—
MAZ7360-A	34.0	36.16											
MAZ7360-B	35.84	38.0											
MAZ7390	37.0	41.0	10	5	26	50	10	36.3	10	65	Orange	White	—
MAZ7430	40.0	46.0	10	5	29	50	10	41.1	10	60	Yellow	Orange	—
MAZ7470	44.0	50.0	10	5	31	50	10	44.9	10	55	Yellow	Purple	—
MAZ7510	48.0	54.0	10	5	33	50	10	48.6	10	50	Green	Brown	—
MAZ7560	52.0	60.0	10	5	35	50	10	54.9	10	45	Green	Blue	—

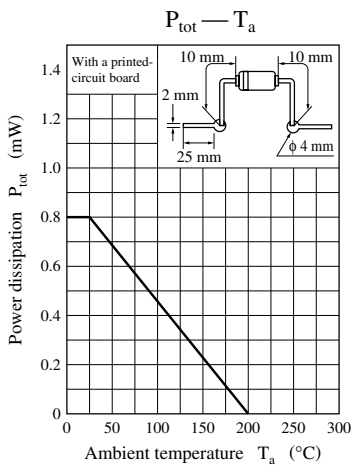

Zener Diodes

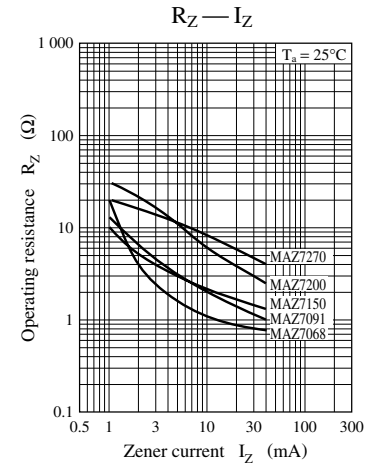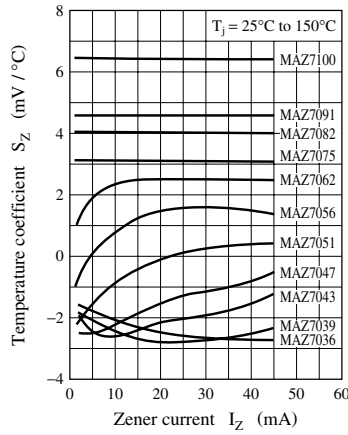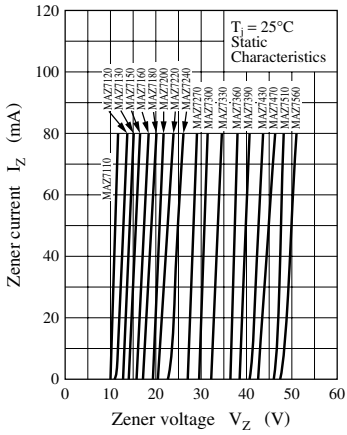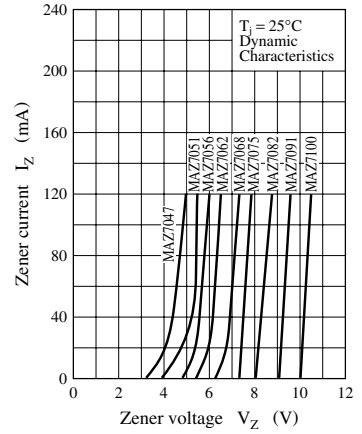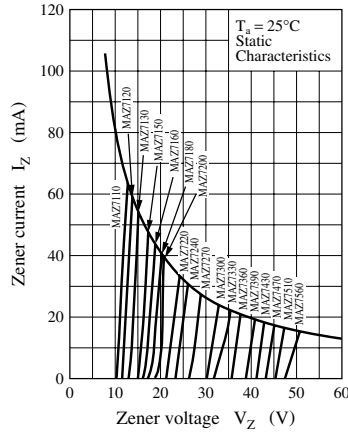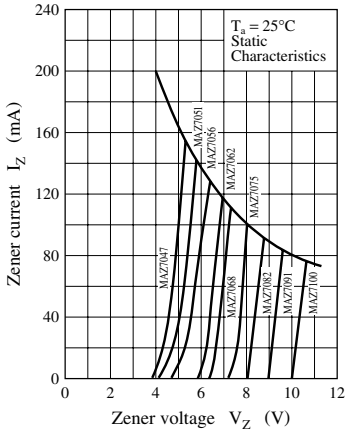

Request for your special attention and precautions in using the technical information and semiconductors described in this book

- (1) If any of the products or technical information described in this book is to be exported or provided to non-residents, the laws and regulations of the exporting country, especially, those with regard to security export control, must be observed.
- (2) The technical information described in this book is intended only to show the main characteristics and application circuit examples of the products, and no license is granted under any intellectual property right or other right owned by our company or any other company. Therefore, no responsibility is assumed by our company as to the infringement upon any such right owned by any other company which may arise as a result of the use of technical information described in this book.
- (3) The products described in this book are intended to be used for standard applications or general electronic equipment (such as office equipment, communications equipment, measuring instruments and household appliances).
Consult our sales staff in advance for information on the following applications:
 - Special applications (such as for airplanes, aerospace, automobiles, traffic control equipment, combustion equipment, life support systems and safety devices) in which exceptional quality and reliability are required, or if the failure or malfunction of the products may directly jeopardize life or harm the human body.
 - Any applications other than the standard applications intended.
- (4) The products and product specifications described in this book are subject to change without notice for modification and/or improvement. At the final stage of your design, purchasing, or use of the products, therefore, ask for the most up-to-date Product Standards in advance to make sure that the latest specifications satisfy your requirements.
- (5) When designing your equipment, comply with the range of absolute maximum rating and the guaranteed operating conditions (operating power supply voltage and operating environment etc.). Especially, please be careful not to exceed the range of absolute maximum rating on the transient state, such as power-on, power-off and mode-switching. Otherwise, we will not be liable for any defect which may arise later in your equipment.
 - Even when the products are used within the guaranteed values, take into the consideration of incidence of break down and failure mode, possible to occur to semiconductor products. Measures on the systems such as redundant design, arresting the spread of fire or preventing glitch are recommended in order to prevent physical injury, fire, social damages, for example, by using the products.
- (6) Comply with the instructions for use in order to prevent breakdown and characteristics change due to external factors (ESD, EOS, thermal stress and mechanical stress) at the time of handling, mounting or at customer's process. When using products for which damp-proof packing is required, satisfy the conditions, such as shelf life and the elapsed time since first opening the packages.
- (7) This book may be not reprinted or reproduced whether wholly or partially, without the prior written permission of Matsushita Electric Industrial Co., Ltd.