




New

- Corresponding to Surface Mounting, and a low profile type
- Small dimensions, and a low profile type (1.1mm or 1.6mm thick)
- Leadless type in a ceramic package.
- Reflow soldering is applicable.
- Automatic mounting is possible, using embossed taping.

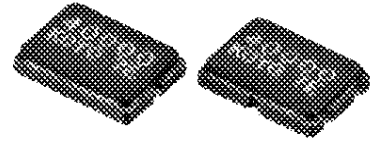

Specifications		
Item	SX-7K, SX-7L (h=1.6mm)	SX-7F, SX-7G (h=1.1mm)
Frequency	8.0~40MHz 40~100MHz	12.8~40MHz 40~100MHz
Vibration Mode	At- cut, fundamental, 3rd overtone	
Frequency Tolerance	±30ppm, ±50ppm (25℃)	
Temperature Characteristic	±30ppm, ±50ppm (-20℃~+70℃ (25℃ standard))	
Equivalent Series Resistance	60Ω Max.	
Shunt Capacitance	7pF Max.	
Load Capacitance	Series Resonance, 16pF, 20pF	
Drive Level	100μW	
Aging	ΔF/F= ±5ppm Max. (25 ±3℃) First year	

Other specifications will be available upon consultation.

■ Dimensions(Unit:mm)

