

Voltage regulator diodes

BZX79 series

FEATURES


- Total power dissipation:
max. 500 mW
- Four tolerance series: $\pm 1\%$, $\pm 2\%$,
 $\pm 3\%$ and $\pm 5\%$
- Working voltage range:
nom. 2.4 to 75 V (E24 range)
- Non-repetitive peak reverse power
dissipation: max. 40 W.

APPLICATIONS

- Low voltage stabilizers or voltage
references.

DESCRIPTION

Low-power voltage regulator diodes in hermetically sealed leaded glass SOD27 (DO-35) packages. The diodes are available in the normalized E24 $\pm 1\%$ (BZX79-A), $\pm 2\%$ (BZX79-B), $\pm 3\%$ (BZX79-F) and $\pm 5\%$ (BZX79-C) tolerance range. The series consists of 37 types with nominal working voltages from 2.4 to 75 V.

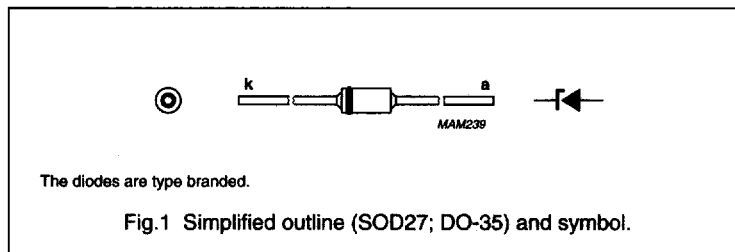

LIMITING VALUES

In accordance with the Absolute Maximum Rating System (IEC 134).

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
I_F	continuous forward current		–	250	mA
I_{ZSM}	non-repetitive peak reverse current	$t_p = 100 \mu\text{s}$; square wave; $T_j = 25^\circ\text{C}$ prior to surge		see Tables 1, 2, 3 and 4	
P_{tot}	total power dissipation	$T_{amb} = 50^\circ\text{C}$; note 1	–	400	mW
		$T_{amb} = 50^\circ\text{C}$; note 2	–	500	mW
P_{ZSM}	non-repetitive peak reverse power dissipation	$t_p = 100 \mu\text{s}$; square wave; $T_j = 25^\circ\text{C}$ prior to surge; see Fig.3	–	40	W
T_{stg}	storage temperature		–65	+200	$^\circ\text{C}$
T_j	junction temperature		–65	+200	$^\circ\text{C}$

Notes

1. Device mounted on a printed circuit-board without metallization pad; lead length max.
2. Tie-point temperature $\leq 50^\circ\text{C}$; max. lead length 8 mm.

Voltage regulator diodes

BZX79 series

ELECTRICAL CHARACTERISTICS

Total BZX79-A and B and F and C series

 $T_j = 25\text{ }^\circ\text{C}$; unless otherwise specified.

SYMBOL	PARAMETER	CONDITIONS	MAX.	UNIT
V_F	forward voltage	$I_F = 10\text{ mA}$; see Fig.4	0.9	V
I_R	reverse current			
	BZX79-A/B/F/C2V4	$V_R = 1\text{ V}$	50	μA
	BZX79-A/B/F/C2V7	$V_R = 1\text{ V}$	20	μA
	BZX79-A/B/F/C3V0	$V_R = 1\text{ V}$	10	μA
	BZX79-A/B/F/C3V3	$V_R = 1\text{ V}$	5	μA
	BZX79-A/B/F/C3V6	$V_R = 1\text{ V}$	5	μA
	BZX79-A/B/F/C3V9	$V_R = 1\text{ V}$	3	μA
	BZX79-A/B/F/C4V3	$V_R = 1\text{ V}$	3	μA
	BZX79-A/B/F/C4V7	$V_R = 2\text{ V}$	3	μA
	BZX79-A/B/F/C5V1	$V_R = 2\text{ V}$	2	μA
	BZX79-A/B/F/C5V6	$V_R = 2\text{ V}$	1	μA
	BZX79-A/B/F/C6V2	$V_R = 4\text{ V}$	3	μA
	BZX79-A/B/F/C6V8	$V_R = 4\text{ V}$	2	μA
	BZX79-A/B/F/C7V5	$V_R = 5\text{ V}$	1	μA
	BZX79-A/B/F/C8V2	$V_R = 5\text{ V}$	700	nA
	BZX79-A/B/F/C9V1	$V_R = 6\text{ V}$	500	nA
	BZX79-A/B/F/C10	$V_R = 7\text{ V}$	200	nA
	BZX79-A/B/F/C11	$V_R = 8\text{ V}$	100	nA
	BZX79-A/B/F/C12	$V_R = 8\text{ V}$	100	nA
	BZX79-A/B/F/C13	$V_R = 8\text{ V}$	100	nA
BZX79-A/B/F/C15 to 75	$V_R = 0.7V_{Znom}$	50	nA	

Voltage regulator diodes

BZX79 series

Table 1 Per type BZX79-*A/B*2V4 to *A/B*24
 $T_j = 25\text{ }^\circ\text{C}$; unless otherwise specified.

BZX79- A or B XXX	WORKING VOLTAGE V_Z (V) at $I_{Ztest} = 5\text{ mA}$				DIFFERENTIAL RESISTANCE r_{diff} (Ω)				TEMP. COEFF. S_z (mV/K) at $I_{Ztest} = 5\text{ mA}$ (see Figs 5 and 6)			DIODE CAP. C_d (pF) at $f = 1\text{ MHz}$; $V_R = 0\text{ V}$	NON-REPETITIVE PEAK REVERSE CURRENT I_{ZSM} (A) at $t_p = 100\text{ }\mu\text{s}$; $T_{amb} = 25\text{ }^\circ\text{C}$
	Tol. $\pm 1\%$ (A)		Tol. $\pm 2\%$ (B)		at $I_{Ztest} = 1\text{ mA}$		at $I_{Ztest} = 5\text{ mA}$		MIN.	TYP.	MAX.		
	MIN.	MAX.	MIN.	MAX.	TYP.	MAX.	TYP.	MAX.					
2V4	2.37	2.43	2.35	2.45	275	600	70	100	-3.5	-1.6	0	450	6.0
2V7	2.67	2.73	2.65	2.75	300	600	75	100	-3.5	-2.0	0	450	6.0
3V0	2.97	3.03	2.94	3.06	325	600	80	95	-3.5	-2.1	0	450	6.0
3V3	3.26	3.34	3.23	3.37	350	600	85	95	-3.5	-2.4	0	450	6.0
3V6	3.56	3.64	3.53	3.67	375	600	85	90	-3.5	-2.4	0	450	6.0
3V9	3.86	3.94	3.82	3.98	400	600	85	90	-3.5	-2.5	0	450	6.0
4V3	4.25	4.35	4.21	4.39	410	600	80	90	-3.5	-2.5	0	450	6.0
4V7	4.65	4.75	4.61	4.79	425	500	50	80	-3.5	-1.4	0.2	300	6.0
5V1	5.04	5.16	5.00	5.20	400	480	40	60	-2.7	-0.8	1.2	300	6.0
5V6	5.54	5.66	5.49	5.71	80	400	15	40	-2.0	1.2	2.5	300	6.0
6V2	6.13	6.27	6.08	6.32	40	150	6	10	0.4	2.3	3.7	200	6.0
6V8	6.73	6.87	6.66	6.94	30	80	6	15	1.2	3.0	4.5	200	6.0
7V5	7.42	7.58	7.35	7.65	30	80	6	15	2.5	4.0	5.3	150	4.0
8V2	8.11	8.29	8.04	8.36	40	80	6	15	3.2	4.6	6.2	150	4.0
9V1	9.00	9.20	8.92	9.28	40	100	6	15	3.8	5.5	7.0	150	3.0
10	9.90	10.10	9.80	10.20	50	150	8	20	4.5	6.4	8.0	90	3.0
11	10.89	11.11	10.80	11.20	50	150	10	20	5.4	7.4	9.0	85	2.5
12	11.88	12.12	11.80	12.20	50	150	10	25	6.0	8.4	10.0	85	2.5
13	12.87	13.13	12.70	13.30	50	170	10	30	7.0	9.4	11.0	80	2.5
15	14.85	15.15	14.70	15.30	50	200	10	30	9.2	11.4	13.0	75	2.0
16	15.84	16.16	15.70	16.30	50	200	10	40	10.4	12.4	14.0	75	1.5
18	17.82	18.18	17.60	18.40	50	225	10	45	12.4	14.4	16.0	70	1.5
20	19.80	20.20	19.60	20.40	60	225	15	55	14.4	16.4	18.0	60	1.5
22	21.78	22.22	21.60	22.40	60	250	20	55	16.4	18.4	20.0	60	1.25
24	23.76	24.24	23.50	24.50	60	250	25	70	18.4	20.4	22.0	55	1.25

Voltage regulator diodes

BZX79 series

Table 2 Per type BZX79-A/B27 to A/B75
 $T_j = 25\text{ }^\circ\text{C}$; unless otherwise specified.

BZX79-A or B XXX	WORKING VOLTAGE V_Z (V) at $I_{Z\text{test}} = 2\text{ mA}$			DIFFERENTIAL RESISTANCE r_{dH} (Ω)						TEMP. COEFF. S_Z (mV/K) at $I_{Z\text{test}} = 2\text{ mA}$ (see Figs 5 and 6)			DIODE CAP. C_d (pF) at $f = 1\text{ MHz}$; $V_R = 0\text{ V}$	NON-REPETITIVE PEAK REVERSE CURRENT I_{ZSM} (A) at $t_p = 100\text{ }\mu\text{s}$; $T_{\text{amb}} = 25\text{ }^\circ\text{C}$	
	Tol. $\pm 1\%$ (A)		Tol. $\pm 2\%$ (B)		at $I_{Z\text{test}} = 0.5\text{ mA}$			at $I_{Z\text{test}} = 2\text{ mA}$			MIN.	TYP.			MAX.
	MIN.	MAX.	MIN.	MAX.	TYP.	MAX.	TYP.	MAX.	MIN.	TYP.					
27	26.73	27.27	26.50	27.50	65	300	25	80	21.4	23.4	25.3	50	1.0		
30	29.70	30.30	29.40	30.60	70	300	30	80	24.4	26.6	29.4	50	1.0		
33	32.67	33.33	32.30	33.70	75	325	35	80	27.4	29.7	33.4	45	0.9		
36	35.64	36.36	35.30	36.70	80	350	35	90	30.4	33.0	37.4	45	0.8		
39	38.61	39.39	38.20	39.80	80	350	40	130	33.4	36.4	41.2	45	0.7		
43	42.57	43.43	42.10	43.90	85	375	45	150	37.6	41.2	46.6	40	0.6		
47	46.53	47.47	46.10	47.90	85	375	50	170	42.0	46.1	51.8	40	0.5		
51	50.49	51.51	50.00	52.00	90	400	60	180	46.6	51.0	57.2	40	0.4		
56	55.44	56.56	54.90	57.10	100	425	70	200	52.2	57.0	63.8	40	0.3		
62	61.38	62.62	60.80	63.20	120	450	80	215	58.8	64.4	71.6	35	0.3		
68	67.32	68.68	66.60	69.40	150	475	90	240	65.6	71.7	79.8	35	0.25		
75	74.25	75.75	73.50	76.50	170	500	95	255	73.4	80.2	88.6	35	0.2		

Voltage regulator diodes

BZX79 series

Table 3 Per type BZX79-F/C2V4 to F/C24
 $T_J = 25\text{ }^\circ\text{C}$; unless otherwise specified.

BZX79- F or C XXX	WORKING VOLTAGE V_Z (V) at $I_{Z\text{test}} = 5\text{ mA}$			DIFFERENTIAL RESISTANCE r_{diff} (Ω)						TEMP. COEFF. S_Z (mV/K) at $I_{Z\text{test}} = 5\text{ mA}$ (see Figs 5 and 6)			DIODE CAP. C_d (pF) at $f = 1\text{ MHz}$; $V_R = 0\text{ V}$	NON-REPETITIVE PEAK REVERSE CURRENT I_{ZSM} (A) at $t_p = 100\text{ }\mu\text{s}$; $T_{\text{amb}} = 25\text{ }^\circ\text{C}$
	To $\pm 3\%$ (F)		To $\pm 5\%$ (C)		at $I_{Z\text{test}} = 1\text{ mA}$		at $I_{Z\text{test}} = 5\text{ mA}$		MIN.	TYP.	MAX.	MAX.		
	MIN.	MAX.	MIN.	MAX.	TYP.	MAX.	TYP.	MAX.						
2V4	2.33	2.47	2.2	2.6	275	600	70	100	-3.5	-1.6	0	450	6.0	
2V7	2.62	2.78	2.5	2.9	300	600	75	100	-3.5	-2.0	0	450	6.0	
3V0	2.91	3.09	2.8	3.2	325	600	80	95	-3.5	-2.1	0	450	6.0	
3V3	3.20	3.40	3.1	3.5	350	600	85	95	-3.5	-2.4	0	450	6.0	
3V6	3.49	3.71	3.4	3.8	375	600	85	90	-3.5	-2.4	0	450	6.0	
3V9	3.78	4.02	3.7	4.1	400	600	85	90	-3.5	-2.5	0	450	6.0	
4V3	4.17	4.43	4.0	4.6	410	600	80	90	-3.5	-2.5	0	450	6.0	
4V7	4.56	4.84	4.4	5.0	425	500	50	80	-3.5	-1.4	0.2	300	6.0	
5V1	4.95	5.25	4.8	5.4	400	480	40	60	-2.7	-0.8	1.2	300	6.0	
5V6	5.43	5.77	5.2	6.0	80	400	15	40	-2.0	1.2	2.5	300	6.0	
6V2	6.01	6.39	5.8	6.6	40	150	6	10	0.4	2.3	3.7	200	6.0	
6V8	6.60	7.00	6.4	7.2	30	80	6	15	1.2	3.0	4.5	200	6.0	
7V5	7.28	7.72	7.0	7.9	30	80	6	15	2.5	4.0	5.3	150	4.0	
8V2	7.95	8.45	7.7	8.7	40	80	6	15	3.2	4.6	6.2	150	4.0	
9V1	8.83	9.37	8.5	9.6	40	100	6	15	3.8	5.5	7.0	150	3.0	
10	9.70	10.30	9.4	10.6	50	150	8	20	4.5	6.4	8.0	90	3.0	
11	10.67	11.33	10.4	11.6	50	150	10	20	5.4	7.4	9.0	85	2.5	
12	11.64	12.36	11.4	12.7	50	150	10	25	6.0	8.4	10.0	85	2.5	
13	12.61	13.39	12.4	14.1	50	170	10	30	7.0	9.4	11.0	80	2.5	
15	14.55	15.45	13.8	15.6	50	200	10	30	9.2	11.4	13.0	75	2.0	
16	15.50	16.50	15.3	17.1	50	200	10	40	10.4	12.4	14.0	75	1.5	
18	17.50	18.50	16.8	19.1	50	225	10	45	12.4	14.4	16.0	70	1.5	
20	19.40	20.60	18.8	21.2	60	225	15	55	14.4	16.4	18.0	60	1.5	
22	21.30	22.70	20.8	23.3	60	250	20	55	16.4	18.4	20.0	60	1.25	
24	23.30	24.70	22.8	25.6	60	250	25	70	18.4	20.4	22.0	55	1.25	

Voltage regulator diodes

BZX79 series

Table 4 Per type BZX79-F/C27 to F/C75
 $T_j = 25\text{ }^\circ\text{C}$; unless otherwise specified.

BZX79- F or C XXX	WORKING VOLTAGE V_Z (V) at $I_{Ztest} = 2\text{ mA}$				DIFFERENTIAL RESISTANCE r_{diff} (Ω)				TEMP. COEFF. S_Z (mV/K) at $I_{Ztest} = 2\text{ mA}$ (see Figs 5 and 6)			DIODE CAP. C_d (pF) at $f = 1\text{ MHz}$; $V_R = 0\text{ V}$	NON-REPETITIVE PEAK REVERSE CURRENT I_{ZSM} (A) at $t_p = 100\text{ }\mu\text{s}$; $T_{amb} = 25\text{ }^\circ\text{C}$
	Tol. $\pm 3\%$ (F)		Tol. $\pm 5\%$ (C)		at $I_{Ztest} = 0.5\text{ mA}$		at $I_{Ztest} = 2\text{ mA}$		MIN.	TYP.	MAX.		
	MIN.	MAX.	MIN.	MAX.	TYP.	MAX.	TYP.	MAX.					
27	26.20	27.80	25.1	28.9	65	300	25	80	21.4	23.4	25.3	50	1.0
30	29.10	30.90	28.0	32.0	70	300	30	80	24.4	26.6	29.4	50	1.0
33	32.00	34.00	31.0	35.0	75	325	35	80	27.4	29.7	33.4	45	0.9
36	34.90	37.10	34.0	38.0	80	350	35	90	30.4	33.0	37.4	45	0.8
39	37.80	40.20	37.0	41.0	80	350	40	130	33.4	36.4	41.2	45	0.7
43	41.70	44.30	40.0	46.0	85	375	45	150	37.6	41.2	46.6	40	0.6
47	45.60	48.40	44.0	50.0	85	375	50	170	42.0	46.1	51.8	40	0.5
51	49.50	52.50	48.0	54.0	90	400	60	180	46.6	51.0	57.2	40	0.4
56	54.30	57.70	52.0	60.0	100	425	70	200	52.2	57.0	63.8	40	0.3
62	60.10	63.90	58.0	66.0	120	450	80	215	58.8	64.4	71.6	35	0.3
68	66.00	70.00	64.0	72.0	150	475	90	240	65.6	71.7	79.8	35	0.25
75	72.80	77.20	70.0	79.0	170	500	95	255	73.4	80.2	88.6	35	0.2

Voltage regulator diodes

BZX79 series

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	CONDITIONS	VALUE	UNIT
$R_{th\ j-tp}$	thermal resistance from junction to tie-point	lead length 8 mm.	300	K/W
$R_{th\ j-a}$	thermal resistance from junction to ambient	lead length max.; see Fig.2 and note 1	380	K/W

Note

1. Device mounted on a printed circuit-board without metallization pad.

GRAPHICAL DATA

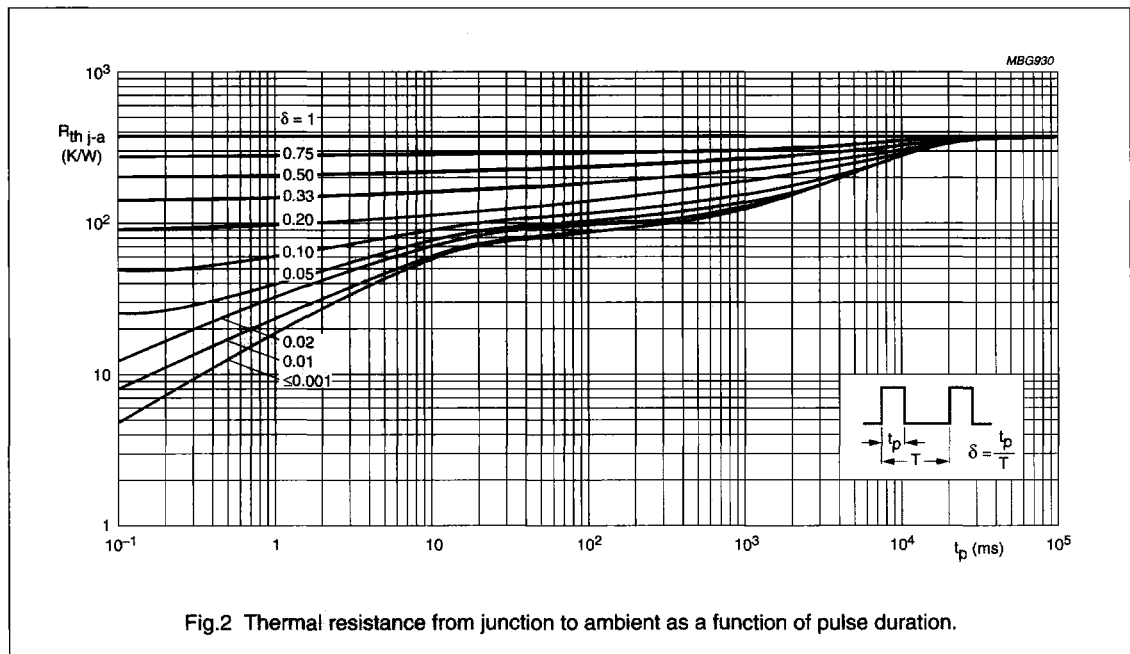


Fig.2 Thermal resistance from junction to ambient as a function of pulse duration.

Voltage regulator diodes

BZX79 series

