





Part No.	Material	λ D (nm)	Lens Type	Iv (mcd) @20mA		Viewing Angle 2θ1/2	Dimension
				Min.	Typ.		


KM-27SURC-03	InGaAlP	628	water clear	650	1600	20°
KM-27SURCK-03	InGaAlP	635	water clear	480	1400	20°
KM-27SEC-03	InGaAlP	601	water clear	1200	2000	20°
KM-27SECK-03	InGaAlP	601	water clear	900	1800	20°
KM-27SYC-03	InGaAlP	588	water clear	900	1500	20°
KM-27SYCK-03	InGaAlP	590	water clear	650	1300	20°
KM-27MGC-03	InGaAlP	568	water clear	280	600	20°
KM-27CGCK-03	InGaAlP	570	water clear	110	400	20°
KM-27ZGC-03	AlInGaN	525	water clear	1800	3300	20°
KM-27VGC-A-03	InGaN	525	water clear	380	800	20°
KM-27VGC-Z-03	InGaN	535	water clear	3300	6400	20°
KM-27QBC-D-03	AlInGaN	470	water clear	180	500	20°
KM-27PBC-A-03	InGaN	470	water clear	110	250	20°
KM-27PBC-J03	InGaN	470	water clear	380	1000	20°

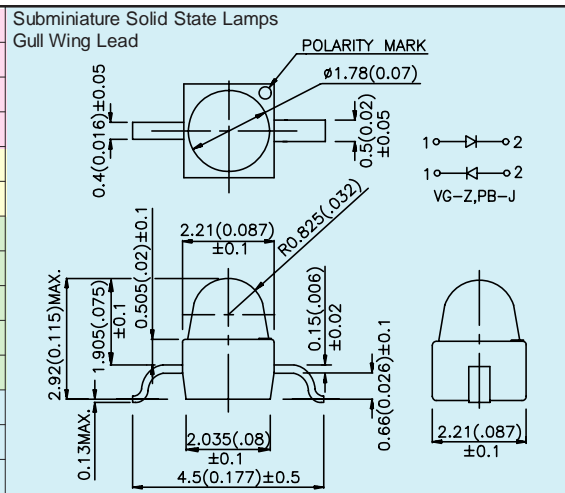

KM-27SURC08	InGaAlP	628	water clear	650	1600	20°
KM-27SURCK-08	InGaAlP	635	water clear	480	1400	20°
KM-27SEC-08	InGaAlP	601	water clear	1200	2000	20°
KM-27SECK-08	InGaAlP	601	water clear	900	1800	20°
KM-27SYC-08	InGaAlP	588	water clear	900	1500	20°
KM-27SYCK-08	InGaAlP	590	water clear	650	1300	20°
KM-27MGC-08	InGaAlP	568	water clear	280	600	20°
KM-27CGCK-08	InGaAlP	570	water clear	110	400	20°
KM-27ZGC-08	AlInGaN	525	water clear	1800	3300	20°
KM-27VGC-A-08	InGaN	525	water clear	380	800	20°
KM-27VGC-Z-08	InGaN	535	water clear	3300	6400	20°
KM-27QBC-D-08	AlInGaN	470	water clear	180	500	20°
KM-27PBC-A-08	InGaN	470	water clear	110	250	20°
KM-27PBC-J-08	InGaN	470	water clear	380	1000	20°

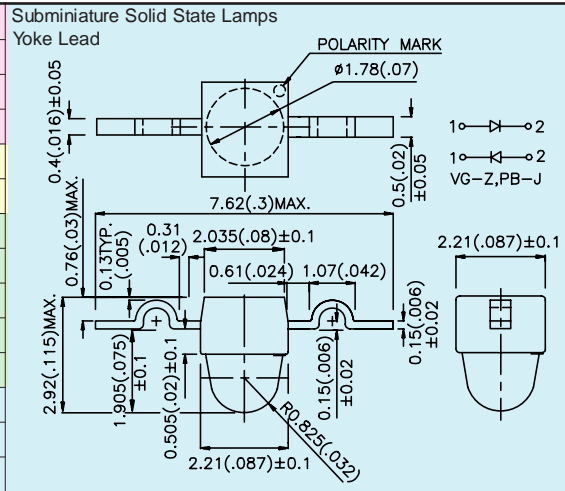

KM-27SURC-09	InGaAlP	628	water clear	650	1600	20°
KM-27SURCK-09	InGaAlP	635	water clear	480	1400	20°
KM-27SEC-09	InGaAlP	601	water clear	1200	2000	20°
KM-27SECK-09	InGaAlP	601	water clear	900	1800	20°
KM-27SYC-09	InGaAlP	588	water clear	900	1500	20°
KM-27SYCK-09	InGaAlP	590	water clear	650	1300	20°
KM-27MGC-09	InGaAlP	568	water clear	280	600	20°
KM-27CGCK-09	InGaAlP	570	water clear	110	400	20°
KM-27ZGC-09	AlInGaN	525	water clear	1800	3300	20°
KM-27VGC-A-09	InGaN	525	water clear	380	800	20°
KM-27VGC-Z-09	InGaN	535	water clear	3300	6400	20°
KM-27QBC-D-09	AlInGaN	470	water clear	180	500	20°
KM-27PBC-A-09	InGaN	470	water clear	110	250	20°
KM-27PBC-J-09	InGaN	470	water clear	380	1000	20°

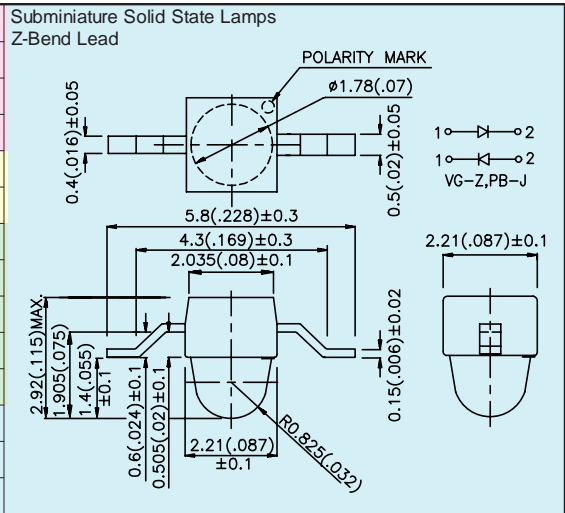

NOTES:

- All dimensions are in millimeters(inches).
- Tolerance is ±0.25mm(0.01") unless otherwise noted.