

"CMD" Series Connector, Right Angle, P.C.B. Mount, Female



Materials

Signal Contact:

Phosphor Bronze, CDA-510

Coax Contact:

Body: Beryllium Copper per
QQ-C-530

Inner Contact: Brass per
MIL-C-50

Insulator:

Polyester, Glass-filled, UL-
94V-0, black

Coax Insulator:

Teflon, white

Shell:

Steel

Finishes

Contact:


30 uinches Au plating over
50 uinches Ni undercoat
on mating area, with
150 uinches Sn/Pb (90/10)
on termination area.

Shell:

150 uinches bright tin

Notes:

Consult our factory
specialists for your
specific design needs.

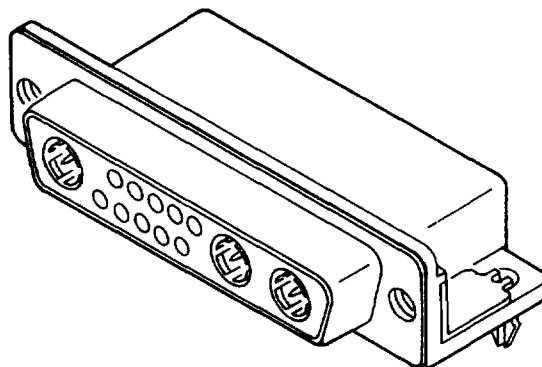

CONTACT NUMBER TOTAL PIN/ COAX PIN	SHELL SIZE	IMPEDANCE OHMS	PART NUMBER	
			W/O JACKSCREW	W/ JACKSCREW
5 / 1	1	50	304-111-310	304-111-311
		75	304-311-310	304-311-311
3 / 3	2	50	304-121-310	304-121-311
		75	304-321-310	304-321-311
7 / 2	2	50	304-121-320	304-121-321
		75	304-321-320	304-321-321
11 / 1	2	50	304-121-330	304-121-331
		75	304-321-330	304-321-331
5 / 5	3	50	304-131-310	304-131-311
		75	304-331-310	304-331-311
9 / 4	3	50	304-131-320	304-131-321
		75	304-331-320	304-331-321
13 / 3	3	50	304-131-330	304-131-331
		75	304-331-330	304-331-331
17 / 2	3	50	304-131-340	304-131-341
		75	304-331-340	304-331-341
21 / 1	3	50	304-131-350	304-131-351
		75	304-331-350	304-331-351
13 / 1	3	50	304-131-360	304-131-361
		75	304-331-360	304-331-361
8 / 8	4	50	304-141-310	304-141-311
		75	304-341-310	304-341-311
13 / 6	4	50	304-141-320	304-141-321
		75	304-341-320	304-341-321
17 / 5	4	50	304-141-330	304-141-331
		75	304-341-330	304-341-331
21 / 4	4	50	304-141-340	304-141-341
		75	304-341-340	304-341-341
25 / 3	4	50	304-141-350	304-141-351
		75	304-341-350	304-341-351