

- 9 dB Linear Patch Antenna (available with SMA terminal)


## Features



- 9 dB Circular Polarized Antenna
- 902-928 MHz
- Beamwidth: 60°
- Front-to-Back Ratio: 10 dB
- 50W

## Technical Specifications

Frequency Range	-3 dB Beamwidth (E and H plane)
902-928 MHz	60°
Gain	Weight
9 dBi	16 oz.
Front-to-Back (dB)	Mounting Kit
10	Included
Connectors	
SMA Female	

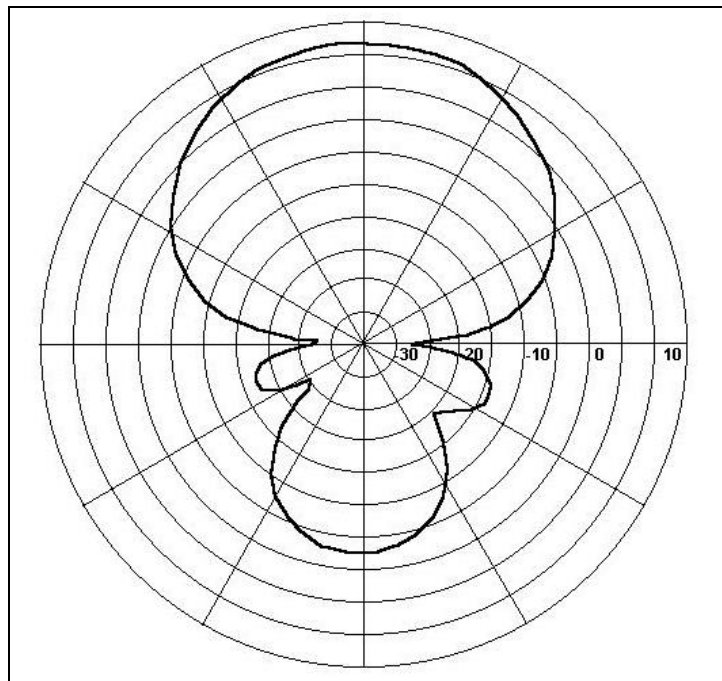

## Contact Information


### Z-Communications

9939 Via Pasar • San Diego, CA 92126  
 TEL: (858) 621-2700 • FAX: (858) 621-2722  
 www.zcomm.com • sales@zcomm.com



Copyright © 2000 Z-Communications, All Rights Reserved  
 All specifications subject to change without notice.

## Mechanical Dimensions

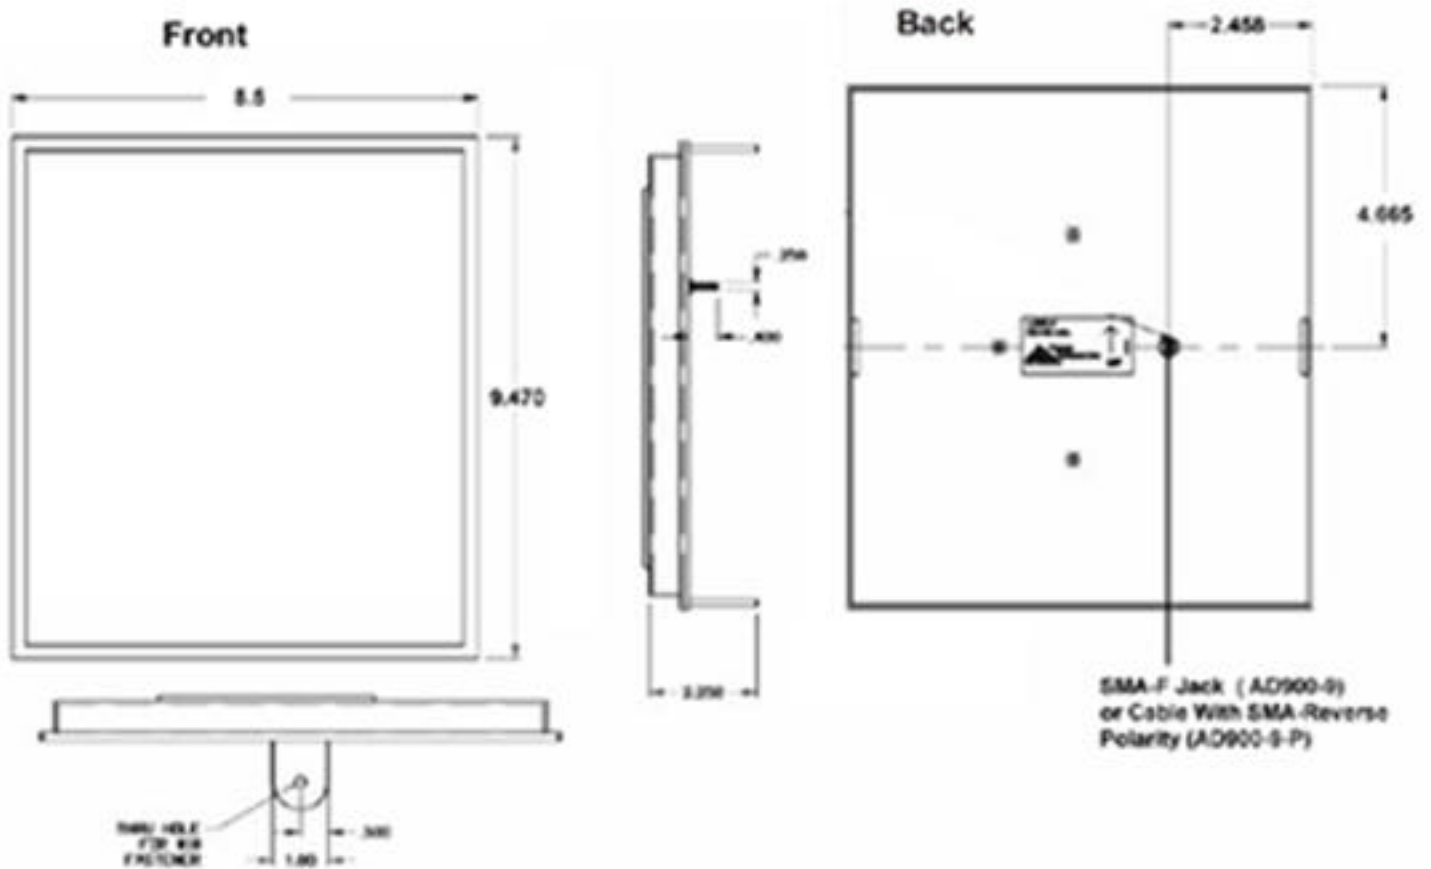

## AMH-001

### 9 dB Linear and Polarized Antenna Mounting Kit

The mounting bracket for the 9 dB patch antenna is rugged and durable machined sheet metal. The backplate comes with four mounting holes, ideal for standard U-bolt connectors and is perfect for indoor mounting.

