




T3-1/4(9mm) MIN. BASED LEDs MINIATURE SCREW

FEATURES

DIRECTLY REPLACES STANDARD INCANDESCENTS

- LONG LIFE / 100,000 HOURS
- SOLID STATE, HIGH SHOCK/ VIBRATION RESISTANT
- BUILT-IN CURRENT LIMITING RESISTOR FOR DIRECT APPLICATIONS FOR 2V to 240VAC
- CHOICE OF 8 COLORS
- LOW CURRENT, POWER SAVINGS to 100 - 500% AND MORE
- USED IN PILOT LIGHTS, INDUSTRIAL CONTROLS, LIGHTED PUSH BUTTON SWITCHES...

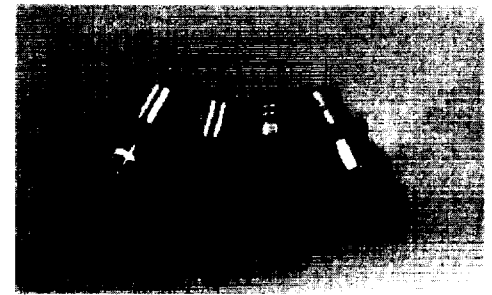

REPLACES FOLLOWING INCANDESCENTS

MINIATURE SCREW: 13, 14 27, 31, 40, 41, 46, 48, 50, 52, 222, 223, 233, 245, 406, 407, 425, 428, 430, 432,502, 605, 965, 1446, 1447, 1449, 1477, 1483, 1487, 1821, 1832...

PART NO.:

S 3 1 2 7 C R 6 - 2 8 V / 3 0 - P

MODEL #	LENS / COLOR / BRIGHT	VOLTS / mAmps Typ	POLARITY
CLUSTERED LED_s T3-1/4(9mm) SCREW: S3127 = 7 LED _s S3126 = 6 LED _s	CR7, CR6, CR5, CO5, CY5, CLY5, CG5, CPG5, CB5, CW5 SPECIALS: COPG5=BICOLOR O/PG CRPG5=BICOLOR R/PG	3126:6Vf =NO RES. REQ'D 8V/60, 12V/60, 14V/60 3127:14Vf= NO RES. REQ'D 24V/30, 28V/30, 36V/20, 48V/20, 60V/15, 120VAC/10 Other Voltages / mAmps Available	CENTER CONTACT: P = ANODE (+) N = CATH. (-) P/NR = ANODE/ NO RESISTOR BP = BIPLOR AC = VAC
MULTICHIP LED_s T3-1/4(9mm) SCREW: 6 CHIP S3306, SM326	CR3K, CR7, CR6, CO6, CY6, CLY6, CG6, CPG6, CB6, CW6 SPECIALS: CRPG6 = BICOLOR R/PG COPG6 = BICOLOR O/PG	4Vf,6Vf,12Vf=NO RES. REQ'D 5V/60, 6V/60, 12V/30, 14V/30, 24V/20, 28V/20, 36V/15, 48V/15, 60V/12, 120VAC/ 8 Other Voltages / mAmps Available	CENTER CONTACT: P = ANODE (+) N = CATH. (-) P/NR = ANODE/ NO RESISTOR BP = BIPOLAR AC = VAC
DUAL CHIP LED T3-1/4(9mm) MIN. SCREW: S3302, S322	CR3K, CR5, CO5, CY5, CG5,	4Vf =NO RES. REQ'D 5V/30, 6V/30, 12V/30, 14V/30, 24V/30, 28V/20... Other Voltages / mAmps Available	CENTER CONTACT: P = ANODE (+) N = CATH. (-) P/NR = ANODE/ NO RESISTOR AC = VAC
SINGLE CHIP LED T3-1/4(9mm) SCREW: S330, S321,	CR5K, CR3K, CR900, CR6, CR5, CO5, CY5, CLY5, CG5, CPG6, CPG5, CB4, CB5	2Vf = NO RES. REQ'D 5V/30, 6V/30, 12V/30, 14V/30, 24V/20, 28V/20... Other Voltages / mAmps Available	CENTER CONTACT: P = ANODE (+) N = CATH. (-) P/NR = ANODE/ NO RESISTOR AC = VAC
10mm BULB LED 1 CHIP / LOW COST SCREW: S300	CR3K, CR6, CR4, CY4, CG4, TR6, TR4, TY4, TG4	2Vf = NO RES. REQ'D 5V/30, 6V/30, 12V/30, 14V/30, 24V/20, 28V/20... Other Voltages / mAmps Available	CENTER CONTACT: P = ANODE (+) N = CATH. (-) P/NR = ANODE/ NO RESISTOR

SPECIALS: BICOLORS, BLINKING , INFRAREDS, RIGHT ANGLE ILLUMINATORS...


LENS TYPE: C=CLEAR, T=TRANSLUCENT (DIFFUSED),

COLOR CODES: R=RED, O=ORANGE, Y=AMBER YELLOW, LY=LIME YELLOW, G=GREEN, PG=PURE GREEN, B=BLUE, W=WHITE (RED/GREEN)


BRIGHTNESS CODES: 900 = 900mcd WIDE RED, 3K = 3Kmcd NARROW RED, 7 = HI ULTRA RED ONLY, 6 = ULTRA, 5 = SUPER BRIGHT, 3/4 = HI EFFICIENCY

NOTE: WHEN PLACING ORDERS OR REQUESTING SAMPLES, PLEASE INDICATE INCANDESCENT LAMP NUMBER BEING REPLACED. WHEN SELECTING THE LED COLOR, MATCH EXISTING LENS COLOR TO LED COLOR.


S3127, S3126

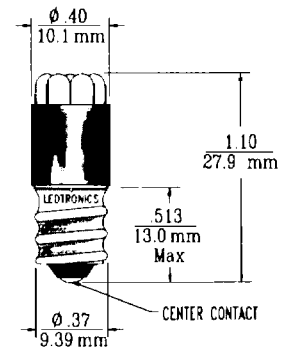


S3306, S3302
S330



S326



S300



S321, S322

