
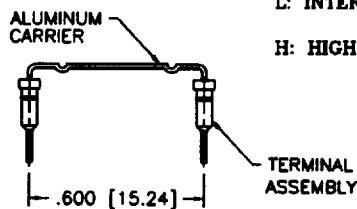
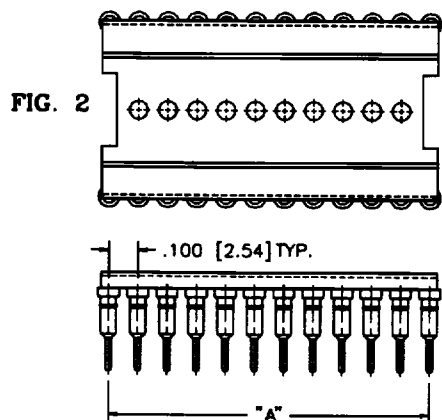


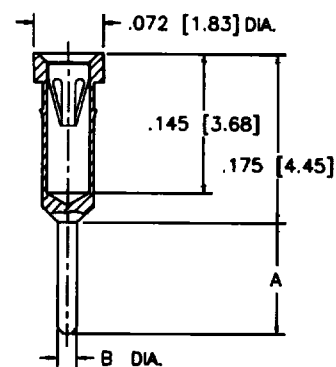


ALUMINUM CARRIER CHART			
	PIN	DIM "A"	
FIG. 1	6	.200 [5.08]	306
	8	.300 [7.62]	308
	10	.400 [10.16]	310
	14	.600 [15.24]	314
	16	.700 [17.78]	316
	18	.800 [20.32]	318
	20	.900 [22.86]	320
	22	1.000 [25.40]	322
	24	1.100 [27.94]	324
	24	1.100 [27.94]	624
FIG. 2	28	1.300 [33.02]	628
	30	1.400 [35.56]	630
	32	1.500 [38.10]	632
	36	1.700 [43.18]	636
	40	1.900 [48.26]	640
	48	2.300 [58.42]	648

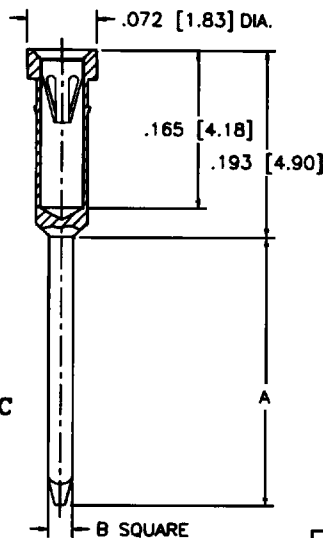

TERMINAL STYLE			
TERMINAL	FIG	DIM "A"	DIM "B"
-01	D	.115 [2.92]	.020 [0.51]
-02	C	.370 [9.40]	.025 [0.64]
-03	C	.510 [12.95]	.025 [0.64]
-08	D	.170 [4.31]	.020 [0.51]
-09	D	.280 [7.11]	.020 [0.51]
-11	D	.135 [3.43]	.020 [0.51]
-94	D	.125 [3.17]	.018 [0.46]

CONTACT TYPE

S: STANDARD DIP	INSERTION FORCE	9.0 oz. AVG.
	WITHDRAWAL FORCE	2.0 oz. MIN.
M: STANDARD PGA	INSERTION FORCE	1.8 oz. MAX.
	WITHDRAWAL FORCE	0.5 oz. MIN.
L: INTERSTITIAL PGA	INSERTION FORCE	1.0 oz. MAX.
	WITHDRAWAL FORCE	0.3 oz. MIN.
H: HIGH FORCE	INSERTION FORCE	18.3 oz. MAX.
	WITHDRAWAL FORCE	4.2 oz. MIN.

TECHNICAL SPECIFICATIONS

MATERIAL CARRIER	ALUMINUM
TERMINAL CONTACT	BRASS PER ASTM-B16 BeCu PER ASTM-B194
CONTACT FORCES	
INSERTION	STANDARD 9 oz. AVG.
WITHDRAWAL	STANDARD 2 oz. MIN.

ORDERING INFORMATION

120-XXX-XXX-PXX	
SERIES	
DIP - SPACING	
NO. OF PINS	
TERMINAL STYLE	
FOR OPTIONAL TERMINAL STYLES SEE TERMINAL STYLES	
CONTACT TYPE	
PLATING: TERMINAL / CONTACT	
P30: GOLD / GOLD	
P31: TIN-LEAD / GOLD	
P32: TIN-LEAD / TIN	
OTHER PLATINGS AVAILABLE SEE OPTIONAL PLATING	