



OPTOCLIP II CONNECTOR

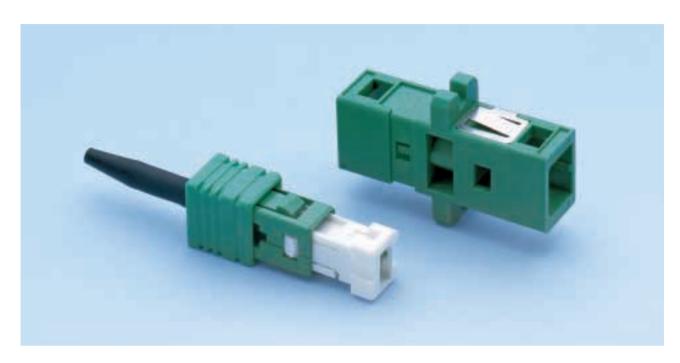



rigid length 44

OPTOCLIP II is based on an entirely new construction. The fibres are not conventionally connected with two ferrules and a sleeve. Instead, the adapter's alignment element couples the

two fibres with great precision, which allows easy field assembly in less than $2^{1}/2$ minutes.

Order table: OPTOCLIP II Multimode APC (beige)

For fibre type:	Insertion loss [dB](50% / 98%):	Туре:
G50/125 G62.5/125	<0.2 / <0.5	FOC2-STD-B600

Order table: OPTOCLIP II APC (green)

	Insertion loss [dB](50% / 98%):	Туре:
E9/125	<0.15 / <0.4	FOC2-STD-A600

Types printed extra bold are stock items. For description of connector refer to page 2.01

Crimpset black

for cable-Ø:	Туре:
<1.0 mm	included ¹⁾
2.0 – 2.4 mm	024-BK-E001
2.5 – 2.8 mm	028-BK-E001
2.9 – 3.5 mm	035-BK-E001

¹⁾ in connector colour

2.16