

Termination DIN

50Ω

DC to 2000 MHz

LOUIS-50



Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C

Permanent damage may occur if any of these limits are exceeded.

Features

- wideband coverage, DC to 2000 MHz
- return loss, 33 dB typ. up to 1000 MHz and 27 dB typ. up to 2000 MHz


CASE STYLE: LL987

Connectors	Model	Price	Qty.
DIN Male w/retaining sleeve	LOUIS-50	\$11.95 ea.	(1-9)

Applications

- cellular communications
- satellite communications
- test set-up

Outline Drawing

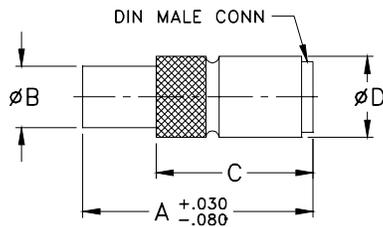

Electrical Specifications (T_{AMB}=25°C)

FREQUENCY (MHz)	IMPEDANCE (OHMS)	RETURN LOSS (dB) MIN.			POWER RATING* (W)
		DC-0.5 GHz	DC-1 GHz	DC-2 GHz	
DC-2000	50	28	28	21	0.125


*Up to 70°C, derate linearly to 80% at 85°C

Outline Dimensions (inch/mm)

A	B	C	D	wt
0.94	0.25	0.64	0.33	grams
23.88	6.35	16.26	8.38	6.50

Typical Performance Data

Frequency (MHz)	Return Loss (dB)
1.00	52.55
20.00	51.45
40.00	50.07
70.00	48.50
100.00	47.17
300.00	41.88
500.00	40.34
700.00	38.69
1000.00	35.56
1200.00	33.84
1300.00	32.63
1500.00	30.08
1700.00	28.32
1900.00	26.84
2000.00	26.18

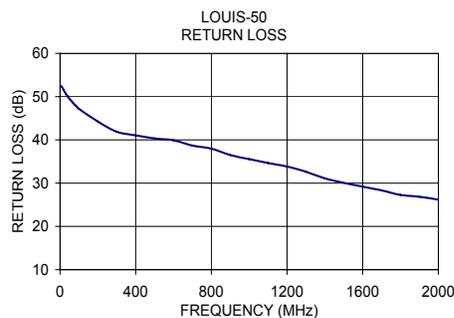

Mini-Circuits
ISO 9001 ISO 14001 AS 9100 CERTIFIED

For detailed performance specs & shopping online see web site

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine Provides ACTUAL Data Instantly at minicircuits.com

IF/RF MICROWAVE COMPONENTS

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

REV. B
M127695
LOUIS-50
EDU-0283
URJ/RS/CP
100611