


162


35 MODELS
0°C to + 50°C Operating
Temperature
Single-Dual Multiple
Outputs Available
Standard 100%
Hi Temp Testing



Universal Input Voltage
No Jumper Required
Multiple Outputs

OFU4-40 Watt, 85-264 VAC Input

MODEL NUMBER	MAX TOTAL POWER	OUTPUT 1				OUTPUT 2				OUTPUT 3				MECH. DRAWING	PRICE 1-24
		V OUTPUT	I MINIMUM	I MAXIMUM	TOLERANCE	V OUTPUT	I MINIMUM	I MAXIMUM	TOLERANCE	V OUTPUT	I MINIMUM	I MAXIMUM	TOLERANCE		
OFU4-1S	30W	+5VDC	0.5A	6A	1%	-	-	-	-	-	-	-	-	B	59.40
OFU4-2S	40W	+12VDC	0.2A	3.5A	1%	-	-	-	-	-	-	-	-	B	59.40
OFU4-3S	40W	+15VDC	0.2A	3A	1%	-	-	-	-	-	-	-	-	B	59.40
OFU4-4S	40W	+24VDC	0.1A	2A	1%	-	-	-	-	-	-	-	-	B	59.40
OFU4-5D	40W	+5VDC	0.5A	3A	3%	+12VDC	0.2A	2A	5%	-	-	-	-	B	60.60
OFU4-6D	40W	+5VDC	0.5A	3A	3%	+15VDC	0.2A	2A	5%	-	-	-	-	B	60.60
OFU4-7D	40W	+5VDC	0.5A	3A	3%	+24VDC	0.1A	1A	5%	-	-	-	-	B	60.60
OFU4-8M	40W	+5VDC	0.5A	3A	3%	+12VDC	0.2A	2A	5%	-5VDC	0.05A	0.3A	10%	B	61.60
OFU4-9M	40W	+5VDC	0.5A	3A	3%	+12VDC	0.2A	2A	5%	-12VDC	0.05A	0.3A	10%	B	61.60
OFU4-10M	40W	+5VDC	0.5A	3A	3%	+15VDC	0.2A	2A	5%	-15VDC	0.05A	0.3A	10%	B	61.60
OFU4-11M	40W	+5VDC	0.5A	3A	3%	+15VDC	0.2A	2A	5%	-12VDC	0.05A	0.3A	10%	B	61.60
OFU4-12M	40W	+5VDC	0.5A	3A	3%	+24VDC	0.1A	1A	5%	-12VDC	0.05A	0.3A	10%	B	61.60

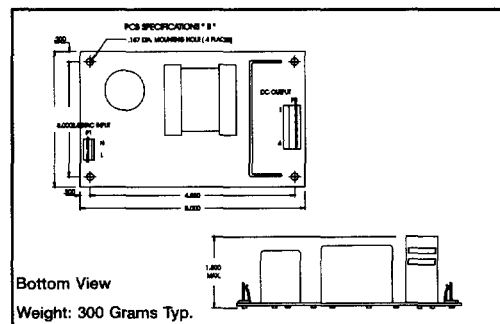

NOTES: 1. Dimensions shown in inch.
2. Tolerance 0.02 maximum.
3. Weight: 10.6 oz. (300 grams) approx.

CONNECTOR DATA

Input connector mates with Molex housing 09-50-3031 and Molex 2878 series crimp terminal.


Output connector mates with Molex housing 09-50-3061 and Molex 2878 series crimp terminal.

PIN CHART PCB "B"

MODEL NUMBER	DC OUTPUT CONNECTOR					
	PIN 1	PIN 2	PIN 3	PIN 4	PIN 5	PIN 6
OFU4-1S/2S/3S/4S	OUTPUT #1	OUTPUT #1	OUTPUT #1	RETURN COMMON	RETURN COMMON	RETURN N.C.
OFU4-5D/6D/7D	OUTPUT #2	OUTPUT #1	OUTPUT #1	COMMON	COMMON	COMMON
OFU4-8M/9M/10M/11M/12M	OUTPUT #2	OUTPUT #1	OUTPUT #1	COMMON	COMMON	OUTPUT #3

OFU6-65 Watt, 85-264 VAC Input

MODEL NUMBER	MAX TOTAL POWER	OUTPUT 1				OUTPUT 2				OUTPUT 3				MECH. DRAWING	PRICE 1-24
		V OUTPUT	I MINIMUM	I MAXIMUM	TOLERANCE	V OUTPUT	I MINIMUM	I MAXIMUM	TOLERANCE	V OUTPUT	I MINIMUM	I MAXIMUM	TOLERANCE		
OFU6-1S	50W	+5VDC	1A	10A	1%	-	-	-	-	-	-	-	-	C	68.20
OFU6-2S	65W	+12VDC	0.5A	5.5A	1%	-	-	-	-	-	-	-	-	C	68.20
OFU6-3S	65W	+15VDC	0.4A	4.5A	1%	-	-	-	-	-	-	-	-	C	68.20
OFU6-4S	65W	+24VDC	0.3A	3A	1%	-	-	-	-	-	-	-	-	C	68.20
OFU6-5D	65W	+5VDC	1A	6A	3%	+12VDC	0.5A	3A	5%	-	-	-	-	C	69.40
OFU6-6D	65W	+5VDC	1A	6A	3%	+15VDC	0.4A	3A	5%	-	-	-	-	C	69.40
OFU6-7D	65W	+5VDC	1A	6A	3%	+24VDC	0.3A	2A	5%	-	-	-	-	C	69.40
OFU6-8M	65W	+5VDC	1A	6A	3%	+12VDC	0.5A	3A	5%	-5VDC	0.1A	0.5A	10%	C	71.60
OFU6-9M	65W	+5VDC	1A	6A	3%	+12VDC	0.5A	3A	5%	-12VDC	0.1A	0.5A	10%	C	71.60
OFU6-10M	65W	+5VDC	1A	6A	3%	+15VDC	0.4A	3A	5%	-15VDC	0.1A	0.5A	10%	C	71.60
OFU6-11M	65W	+5VDC	1A	6A	3%	+15VDC	0.4A	3A	5%	-12VDC	0.1A	0.5A	10%	C	71.60
OFU6-12M	65W	+5VDC	1A	6A	3%	+24VDC	0.3A	2A	5%	-12VDC	0.1A	0.5A	10%	C	71.60

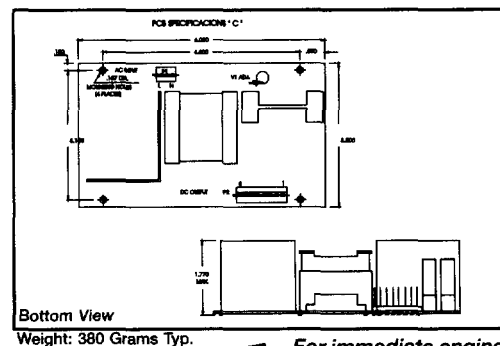

NOTES: 1. Dimensions shown in inch.
2. Tolerance 0.02 maximum.
3. Weight: 10.6 oz. (380 grams) approx.

CONNECTOR DATA

Input connector mates with Molex housing 09-50-3031 and Molex 2878 series crimp terminal.

Output connector mates with Molex housing 09-50-3061 and Molex 2878 series crimp terminal.

PIN CHART PCB "C"

MODEL NUMBER	DC OUTPUT CONNECTOR							
	PIN 1	PIN 2	PIN 3	PIN 4	PIN 5	PIN 6	PIN 7	PIN 8
OFU6-1S/2S/3S/4S	OUTPUT #1	OUTPUT #1	OUTPUT #1	OUTPUT #1	RETURN	RETURN	RETURN	RETURN
OFU6-5D/6D/7D	OUTPUT #1	OUTPUT #1	COMMON	COMMON	OUTPUT #2	OUTPUT #2	N.C.	N.C.
OFU6-8M/9M/10M/11M/12M	OUTPUT #1	OUTPUT #1	COMMON	COMMON	OUTPUT #2	OUTPUT #2	OUTPUT #3	N.C.

For immediate engineering assistance or to place an order - Call Toll Free 800-431-1064

PICO Electronics, Inc.

143 Sparks Avenue, Pelham, NY 10803-1837 • FAX 914-738-8225
www.picoelectronics.com • E-Mail: info@picoelectronics.com

Delivery -
stock to one week