


STEP-UP SWITCHING VOLTAGE REGULATOR IN HERMETIC ISOLATED PACKAGE



1 Amp, 12 V, 15 V And Adjustable Output Voltage Versions In MO-078 Metal Package

FEATURES

- Similar To Industry Standard LM1577 Series
- Available in 12V, 15V And Adjustable Output Voltage Versions
- Hermetic Isolated Packages
- Requires Few External Components
- Protection Features Current And Thermal Limitations
- Hi-Rel Screened

DESCRIPTION

These devices are monolithic integrated circuits that provide all of the power and control functions for step-up (boost), flyback and converter switching regulators. They are simple to use and cost effective as they only require a small number of external components for implementation. The chip incorporates a 3.0 Amp NPN switch and associated protection circuitry featuring current and thermal limitations and under voltage lockout.

ABSOLUTE MAXIMUM RATINGS (See note 1)

Input Voltage, V_{IN}	45 V
Output Switch Voltage, V_{SWITCH}	65 V
Output Switch Current, I_{SWITCH} (See note 2)	6.0 A
Storage Temperature Range	-65°C to + 150°C
Junction Temperature, T_J	+150°C
Lead Soldering Temperature, (10 seconds)	260°C
Power Dissipation, P_D	Internally Limited
Thermal Resistance:	
Junction-to-Case, θ_{JC}	3.0°C/W Typically
Junction-to-Ambient, θ_{JA}	65°C/W

3.3

RECOMMENDED OPERATING CONDITIONS

Input Voltage Range, V_{IN}	3.5 to 40 V
Ambient Operating Temperature Range, T_A	-55°C to + 125°C
Output Switch Voltage Range, V_{SWITCH}	0 to 60 V
Output Switch Current, I_{SWITCH}	3.0 A

Notes:

1. Stresses above the absolute maximum rating may cause damage to the device. Extended operation at the maximum levels may degrade performance and affect reliability.
2. Output current cannot be internally limited when the device is used as a step-up regulator. To prevent damage to the switch, the current must be externally limited to 6.0 A. However, output current is internally limited when the device is used as a flyback or forward converter regulator.

OM1577 Series

ELECTRICAL CHARACTERISTICS - OM1577-12

-55°C T_A 125°C, $V_{IN} = 5V$, $I_{SWITCH} = 0A$, $V_{FEEDBACK} = V_{REF}$ unless otherwise specified.

Parameter	Symbol	Test Conditions	Min.	Max.	Unit
System Parameters					
Output Voltage	V_{OUT}	$V_{IN} = 5V$ to 10V $I_{LOAD} = 100mA$ to 800mA	11.60 11.40	12.40 12.60	V
Line Regulation	$\frac{\Delta V_{OUT}}{\Delta V_{IN}}$	$V_{IN} = 3.5V$ to 10V $I_{LOAD} = 300mA$		60 120	mV
Load Regulation	$\frac{\Delta V_{OUT}}{\Delta I_{LOAD}}$	$V_{IN} = 5V$ $I_{LOAD} = 100mA$ to 800mA		60 120	mV
Device Parameters					
Input Supply Current	I_S	$V_{FEEDBACK} = 14V$ (Switch Off) $I_{SWITCH} = 2.0A$ $V_{COMP} = 2.0V$, (Max. duty cycle)		14 18 60 95	mA
Input Supply Under-Voltage Lockout	V_{UV}	$I_{SWITCH} = 100mA$	2.70 2.65	3.10 3.15	V
Reference Voltage	V_{REF}	Measures at FEEDBACK Pin $V_{IN} = 3.5V$ to 40V $V_{COMP} = 1.0V$	11.76 11.64	12.24 12.36	V
Error Amplifier Transconductance	gm	$I_{COMP} = -30\mu A$ to $+30\mu A$ $V_{COMP} = 1.0V$	210 130	515 615	μmho
Error Amplifier Voltage Gain	A_{VOL}	$V_{COMP} = 1.1V$ to 1.9V $R_{COMP} = 1.0M$ (Note 1)	40 20		V/V
Error Amplifier Output Swing		$V_{FEEDBACK} = 10.0V$ Upper Limit	2.1 1.9	5.0 5.0	V
		$V_{FEEDBACK} = 15.0V$ Lower Limit		0.45 0.60	V
Error Amplifier Output Current	I_{EAO}	$V_{FEEDBACK} = 10.0V$ to 15.0V $V_{COMP} = 0V$	± 120 ± 280	± 300 ± 400	μA
Soft Start Current	I_{SS}	$V_{FEEDBACK} = 10.0V$ $V_{COMP} = 0V$	2.2 7.0	7.5 9.5	μA
Maximum Duty Cycle	D_C	$I_{SWITCH} = 100mA$ $V_{COMP} = 1.5V$	93 90		%
Switch Leakage Current	I_L	$V_{FEEDBACK} = 15V$ $V_{SWITCH} = 65V$, switch off	-1.0 -1.0	360 700	μA
Switch Saturation Voltage	V_{SAT}	$V_{COMP} = 2.0V$ $I_{SWITCH} = 2.0A$ (Max. Duty Cycle)		.65 .85	V
NPN Switch Current Limit		$V_{COMP} = 2.0V$	3.5 2.9	5.3 6.0	A
Oscillator Frequency	f_o	Measured at SWITCH pin, $I_{SWITCH} = 100mA$	48 42	56 62	kHz

Notes:

The • denotes the specifications which apply over the full operating temperature range.

- A 1.0 M Ω resistor is connected to the COMPENSATION pin (error amplifier output) to ensure accuracy in measuring A_{VOL} . In actual applications, the COMPENSATION pin's load resistance should be $\geq 10 M \Omega$, resulting in A_{VOL} that is typically twice the guaranteed minimum limit.
- OM1577-ADJ have the same test conditions as OM1577-12 (see Test Circuit on page 3).

ELECTRICAL CHARACTERISTICS - OM1577-15-55°C T_A 125°C, $V_{IN} = 5V$, $I_{SWITCH} = 0A$, $V_{FEEDBACK} = V_{REF}$ unless otherwise specified.

Parameter	Symbol	Test Conditions	Min.	Max.	Unit
System Parameters					
Output Voltage	V_{OUT}	$V_{IN} = 5V$ to 12V $I_{LOAD} = 100mA$ to 600mA	14.50 • 14.25	15.50 15.75	V
Line Regulation	$\frac{\Delta V_{OUT}}{\Delta V_{IN}}$	$V_{IN} = 3.5V$ to 12V $I_{LOAD} = 300mA$	•	60 120	mV
Load Regulation	$\frac{\Delta V_{OUT}}{\Delta I_{LOAD}}$	$V_{IN} = 5V$ $I_{LOAD} = 100mA$ to 600mA	•	60 120	mV
Device Parameters					
Input Supply Current	I_S	$V_{FEEDBACK} = 18V$ (Switch Off) $I_{SWITCH} = 2.0A$ $V_{COMP} = 2.0V$, (Max. duty cycle)	•	14 18 60 95	mA
Input Supply Under-Voltage Lockout	V_{UV}	$I_{SWITCH} = 100mA$	2.70 • 2.65	3.10 3.15	V
Reference Voltage	V_{REF}	Measures at FEEDBACK Pin $V_{IN} = 3.5V$ to 40V $V_{COMP} = 1.0V$	14.70 • 14.55	15.30 15.45	V
Error Amplifier Transconductance	gm	$I_{COMP} = -30\mu A$ to $+30\mu A$ $V_{COMP} = 1.0V$	160 • 400	420 500	μmho
Error Amplifier Voltage Gain	A_{VOL}	$V_{COMP} = 1.1V$ to 1.9V $R_{COMP} = 1.0M$ (Note 1)	35 • 15		V/V
Error Amplifier Output Swing		$V_{FEEDBACK} = 12.0V$ Upper Limit	2.1 • 1.9	5.0 5.0	V
		$V_{FEEDBACK} = 18.0V$ Lower Limit	•	0.45 0.60	V
Error Amplifier Output Current	I_{EAO}	$V_{FEEDBACK} = 12.0V$ to 18.0 V $V_{COMP} = 1.0V$	± 120 • ± 280	± 300 ± 400	μA
Soft Start Current	I_{SS}	$V_{FEEDBACK} = 12.0V$ $V_{COMP} = 0V$	2.2 • 7.0	7.5 9.5	μA
Maximum Duty Cycle	D_C	$I_{SWITCH} = 100mA$ $V_{COMP} = 1.5V$	93 • 90		%
Switch Leakage Current	I_L	$V_{FEEDBACK} = 18V$ $V_{SWITCH} = 65V$, switch off	-1.0 • -1.0	360 700	μA
Switch Saturation Voltage	V_{SAT}	$V_{COMP} = 2.0V$ $I_{SWITCH} = 2.0A$ (Max. Duty Cycle)	•	.65 .85	V
NPN Switch Current Limit		$V_{COMP} = 2.0V$	3.5 • 2.9	5.3 6.0	A
Oscillator Frequency	f_o	Measured at SWITCH pin, $I_{SWITCH} = 100mA$	48 • 42	56 62	kHz

Notes:

The • denotes the specifications which apply over the full operating temperature range.

1. A 1.0 M resistor is connected to the COMPENSATION pin (error amplifier output) to ensure accuracy in measuring A_{VOL} . In actual applications, the COMPENSATION pin's load resistance should be $\geq 10M$, resulting in A_{VOL} that is typically twice the guaranteed minimum limit.


ORDERING INFORMATION

EXAMPLE: P/N OM1577-12SCM = 12 Volt, C5 Package With Screening

BASIC PART NUMBER	VOLTAGE LEVEL	CASE STYLE	SCREENING
OM1577	12 = 12 Volt	SC = C5 Package	Add "M"
	15 = 15 Volt	SCZ = C5S Package	for 883
	A = Adjustable	Both Packages Isolated	screening


OM1577-12 TEST CIRCUIT

Circuit Used To Specify System Parameters For 12 Volt Version.

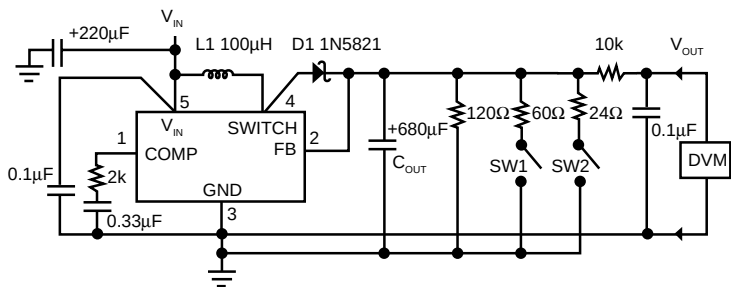


OM1577-15 TEST CIRCUIT

Circuit Used To Specify System Parameters For 15 Volt Version.

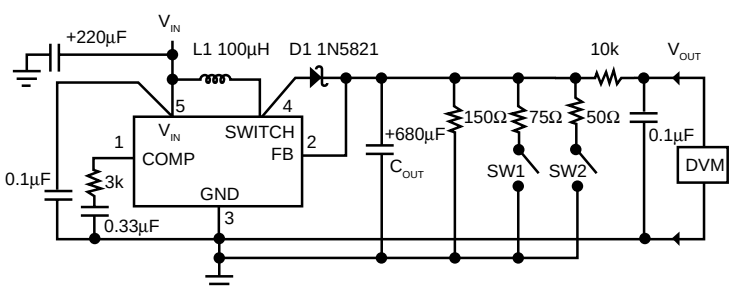

OM1577-A TEST CIRCUIT

Circuit Used To Specify System Parameters For Adjustable Voltage Version.

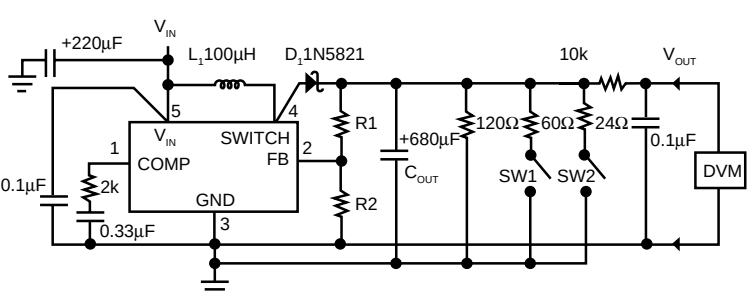

3.3