

Axial-Leaded Capacitors, Round or Flat, Metallized Polypropylene Dielectric Tape Wrapped with Epoxy End Fill


Table of Contents

▪ Applications	2
▪ Electrical Characteristics	2
▪ Physical Characteristics	3
▪ Performance Characteristics	3
▪ Outline Drawing	3
▪ Standard Marking	3
▪ Part Numbering System	3
▪ Typical Performance Curves	4
▪ Tape and Reel Packaging Specification	5
▪ ARPT Table of Standard Electrical/Mechanical Characteristics	6
▪ AFPT Table of Standard Electrical/Mechanical Characteristics.....	11

Information presented in this document is believed to be accurate and reliable. The content, however, is subject to change and Aerovox reserves the right to modify this document without notice.

High-Current Capacitors Type: ARPT/AFPT

Axial-Leaded Capacitors, Round or Flat, Metallized Polypropylene Dielectric Tape Wrapped with Epoxy End Fill

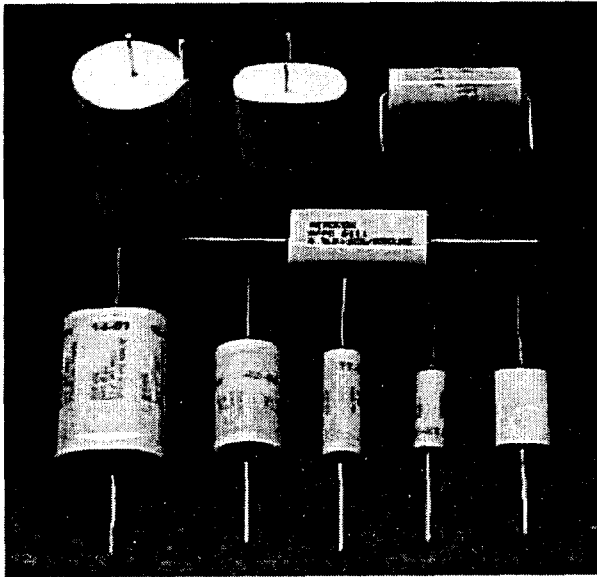

Applications:

- High-current axial film capacitors for power electronic circuits
- Specifically designed for board-mounted applications, which have large peak and rms currents and a high-frequency wave shape imposing a large dV/dt across the capacitor
- Multi-purpose applications including filtering, smoothing, blocking, snubbers and inverters
- Examples of circuits that would utilize these capacitors are switch mode power supplies, electronic ballasts, UPS systems, variable speed drives and electronic welding systems.

Electrical Characteristics (@ +25°C unless otherwise noted):

- Operating Temperature: -40°C to +85°C (fully rated)
- Capacitance: .012 μ F minimum to 40 μ F maximum @ 1KHz
- Tolerance: $\pm 10\%$ (K), $\pm 5\%$ (J)
- Voltage Range: 250 vdc to 850 vdc, 140 vac to 450 vac @ +85°C
- Voltage vs. Temperature: Derate DC working voltage 1.25% per °C, +85°C to 105°C
Derate AC working voltage 1.50% per °C, +85°C to 105°C
- Dissipation Factor: < 0.1% @ 1KHz
- Dielectric Strength: 2 x WVDC for two seconds (terminal to terminal)
- Insulation Resistance: WVDC \leq 300 vdc; 100,000 M Ω minimum or 100,000 M Ω - μ F, whichever is less
WVDC > 300 vdc; 200,000 M Ω - μ F minimum to a maximum of 500,000 M Ω
- Temperature Coefficient: $\pm 2\%$ @ -40°C to +85°C
- Dielectric Absorption: 0.05% typical
- Equivalent Series Resistance: Ω maximum @ 100 KHz and +25°C - see tables
- Ripple Current: ARMS maximum @ 100 KHz and +70° C - see tables
- Peak Current: A maximum - see tables
- dv/dt : v/ μ sec - see tables
- Long-Term Stability: $\pm 1.0\%$ maximum @ two years; +20°C to +40°C and 40% to 60% RH
- Life Expectancy: \geq 30,000 hours @ WWAC

High-Current Capacitors
Type: ARPT/AFPT

**Axial-Leaded Capacitors, Round or Flat,
 Metallized Polypropylene Dielectric Tape
 Wrapped with Epoxy End Fill**


Physical Characteristics:

- Dielectric Material: Polypropylene film
- Electrode Material: Vacuum vapor deposited aluminum
- Winding Construction: Non-inductive, extended metallized film
- Lead Material: Tinned copper wire
- Enclosure: Tape wrap with epoxy end fill
- Flame Retardancy: Units meet standard industry requirements when tested in accordance with UL94 VO
- Packaging: Bulk (ARPT/AFPT) or tape and reel (ARPT only)


Performance Characteristics:

- Accelerated Dry Life: DC: 1.25 x WVDC @ +85°C to ±5°C and 1000 hours
 AC: 1.10 x WVAC @ +85°C to ±5°C and 1000 hours
 Delta Capacitance: ≤ 5.0%
 ESR: ≤ 125% of initial limit
 Insulation Resistance: ≥ 50% of initial limit
- Humidity: 93% ± 5% RH @ +40°C ± 5°C, zero voltage and 500 hours
 Delta Capacitance: ≤ 3.0%
 ESR: ≤ 125% of initial limit
 Insulation Resistance: ≥ 10% of initial limit
- Resistance to Solder Heat: 10 seconds ± one second @ 260°C ± 5°C
 Delta capacitance: ≤ 2.0%
- Lead Pull: Tensile force @ five pounds applied to each lead for five seconds

Mechanical/Marking:

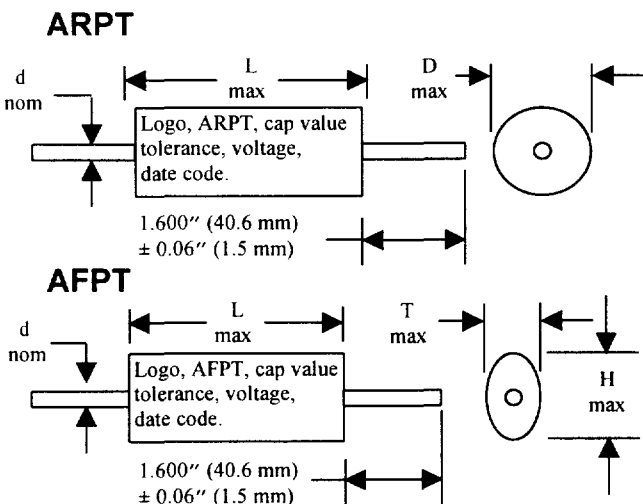

Part Numbering System:

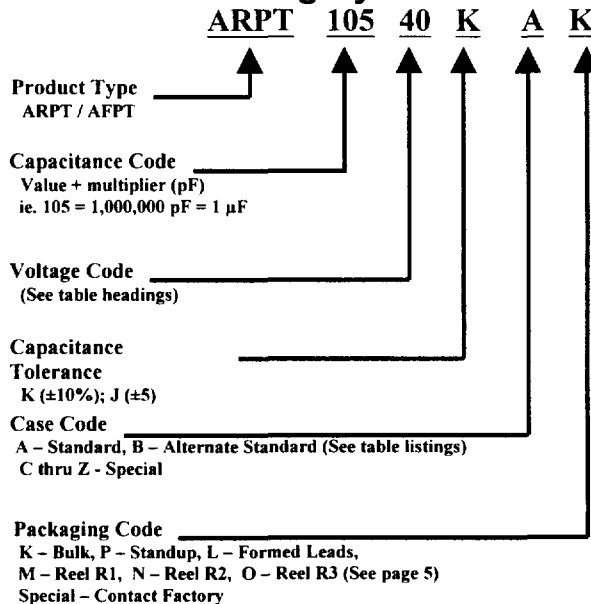


High-Current Capacitors Type: ARPT/AFPT


Axial-Leaded Capacitors, Round or Flat, Metallized Polypropylene Dielectric Tap Wrapped with Epoxy End Fill

Polypropylene Dielectric – Typical Performance Curves:


Capacitance Change vs. Temperature @ 1 kHz

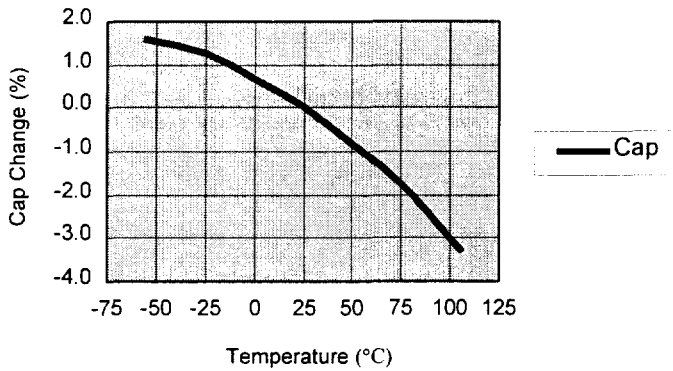


Capacitance Change vs. Frequency @ 25 °C

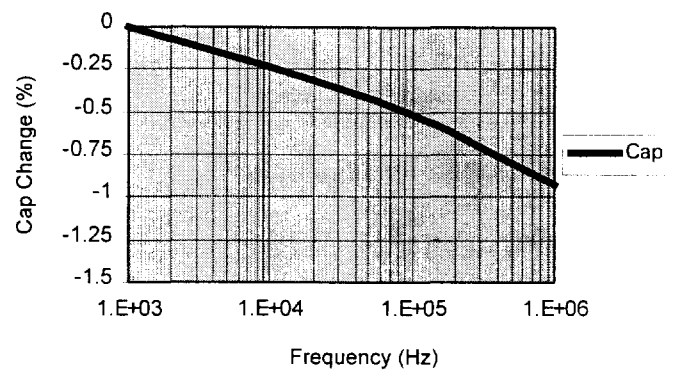


Dissipation Factor vs. Temperature @ 1 kHz

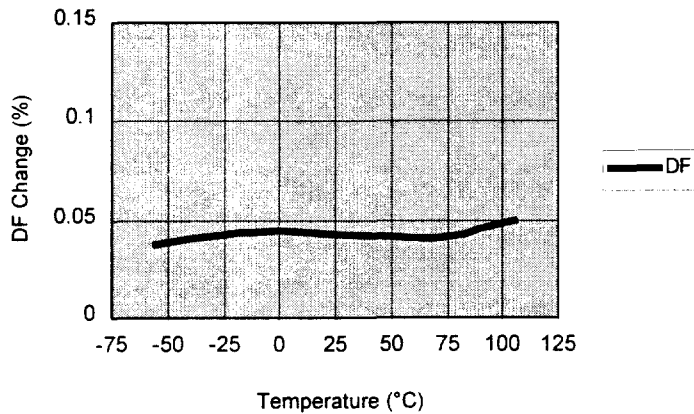

Dissipation Factor vs. Frequency @ 25 °C

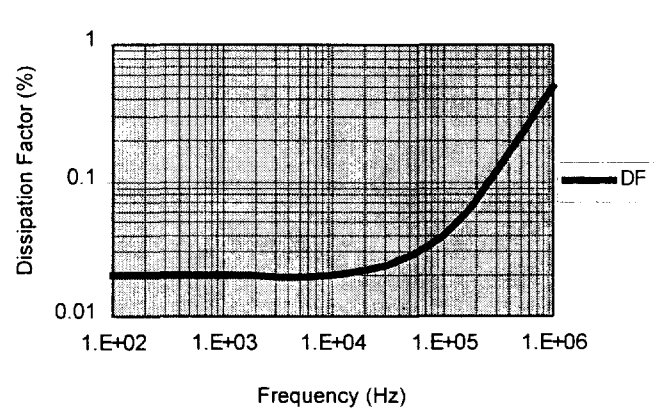

Insulation Resistance (MegOhms x μ F)
 vs. Temperature

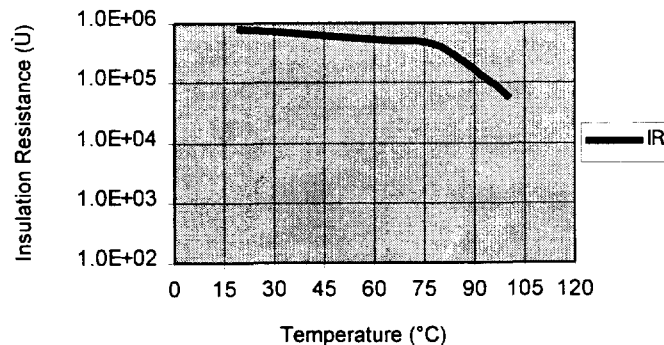

Tape and Reel Specification:

In accordance with EIA-296-E

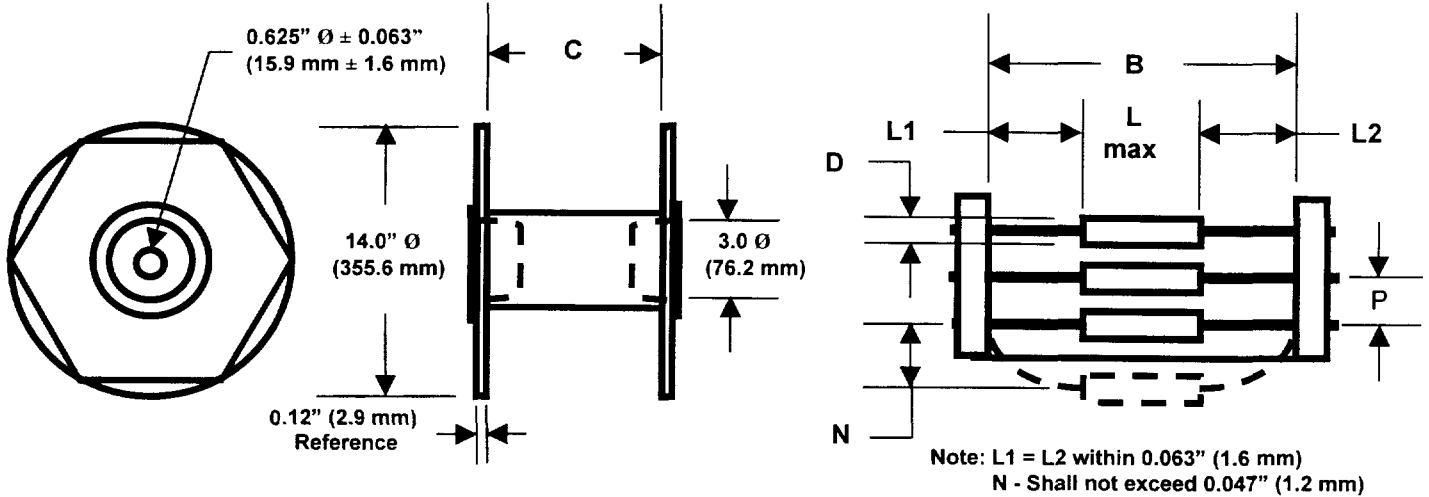


Table 1 – Component Spacing:

D IN (mm)	P IN (mm)
$D \leq 0.200$ (5.0)	0.200 (5.0) ± 0.020 (0.5)
0.200 (5.0) $< D \leq 0.370$ (9.5)	0.400 (10.0) ± 0.020 (0.5)
0.380 (9.6) $\leq D \leq 0.580$ (14.7)	0.600 (15.0) ± 0.020 (0.5)

Table 2 – Tape and Reel Sizes:

L max IN (mm)	Package Code ¹	B IN (mm)	C IN (mm)
$L \leq 0.430$ (11.0)	R1	2.060 (52.4) ± 0.060 (1.5)	2.950 (75.0)
0.430 (11.0) $< L \leq 0.810$ (20.5)	R2	2.500 (63.6) ± 0.060 (1.5)	3.390 (86.0)
$L > 0.810$ (20.5)	R3	2.870 (73.0) ± 0.060 (1.5)	3.740 (95.0)

¹ Package Code Per EIA-296-E

Table 3 – Components Per Reel:

D IN (mm)	Components per Reel
$D \leq 0.200$ (5.0)	3000
0.200 (5.0) $< D \leq 0.260$ (6.5)	1200
0.260 (6.5) $\leq D \leq 0.280$ (7.0)	1100
0.280 (7.0) $\leq D \leq 0.300$ (7.5)	1000
0.300 (7.5) $\leq D \leq 0.330$ (8.5)	800
0.330 (8.5) $\leq D \leq 0.410$ (10.5)	500
0.410 (10.5) $\leq D \leq 0.510$ (13.0)	300
0.510 (13.0) $\leq D \leq 0.580$ (14.7)	250

ARPT Electrical/Mechanical Characteristics:

WVDC = 250 vdc / WVAC = 140 vac (Voltage Code 24)

Nominal Capacitance (µF)	Cap Code	Package Size (maximum)			Case Code	ESR (mΩ max @ 100 kHz & 25 °C)	I ripple (Arms max @ 100 KHz & 70 °C)	I peak (A)	dv / dt (V / µsec)
		D IN (mm)	L IN (mm)	d IN (mm)					
0.22	224	0.236 (6.0)	0.807 (20.5)	0.032 (0.8)	A	40	1.1	5.5	25.0
0.27	274	0.256 (6.5)	0.807 (20.5)	0.032 (0.8)	A	32	1.3	6.8	25.0
0.33	334	0.276 (7.0)	0.807 (20.5)	0.032 (0.8)	A	27	1.5	8.3	25.0
0.39	394	0.295 (7.5)	0.807 (20.5)	0.032 (0.8)	A	23	1.6	9.8	25.0
0.47	474	0.319 (8.1)	0.807 (20.5)	0.032 (0.8)	A	19	1.9	11.8	25.0
0.56	564	0.343 (8.7)	0.807 (20.5)	0.032 (0.8)	A	16	2.2	14.0	25.0
0.68	684	0.374 (9.5)	0.807 (20.5)	0.032 (0.8)	A	13	2.5	17.0	25.0
0.82	824	0.406 (10.3)	0.807 (20.5)	0.032 (0.8)	A	11	2.9	20.5	25.0
1.00	105	0.453 (11.5)	0.807 (20.5)	0.032 (0.8)	A	9	3.4	25.0	25.0
1.20	125	0.492 (12.5)	0.807 (20.5)	0.032 (0.8)	A	8	3.8	30.0	25.0
1.50	155	0.543 (13.8)	0.807 (20.5)	0.032 (0.8)	A	8	4.1	37.5	25.0
		0.402 (10.2)	1.299 (33.0)	0.032 (0.8)	B	24	2.4	15.0	10.0
1.80	185	0.587 (14.9)	0.807 (20.5)	0.032 (0.8)	A	8	4.3	45.0	25.0
		0.441 (11.2)	1.299 (33.0)	0.032 (0.8)	B	20	2.7	18.0	10.0
2.00	205	0.618 (15.7)	0.807 (20.5)	0.032 (0.8)	A	8	4.5	50.0	25.0
		0.461 (11.7)	1.299 (33.0)	0.032 (0.8)	B	18	2.9	20.0	10.0
2.20	225	0.646 (16.4)	0.807 (20.5)	0.032 (0.8)	A	8	4.6	55.0	25.0
		0.480 (12.2)	1.299 (33.0)	0.032 (0.8)	B	16	3.2	22.0	10.0
2.50	255	0.508 (12.9)	1.299 (33.0)	0.032 (0.8)	A	15	3.4	25.0	10.0
2.70	275	0.524 (13.3)	1.299 (33.0)	0.032 (0.8)	A	13	3.7	27.0	10.0
3.00	305	0.547 (13.9)	1.299 (33.0)	0.032 (0.8)	A	12	4.0	30.0	10.0
3.30	335	0.571 (14.5)	1.299 (33.0)	0.032 (0.8)	A	11	4.3	33.0	10.0
4.00	405	0.622 (15.8)	1.299 (33.0)	0.032 (0.8)	A	9	5.0	40.0	10.0
4.70	475	0.669 (17.0)	1.299 (33.0)	0.032 (0.8)	A	8	5.6	47.0	10.0
5.00	505	0.689 (17.5)	1.299 (33.0)	0.032 (0.8)	A	7	6.1	50.0	10.0
5.60	565	0.744 (18.9)	1.299 (33.0)	0.032 (0.8)	A	7	6.3	56.0	10.0
6.80	685	0.815 (20.7)	1.299 (33.0)	0.032 (0.8)	A	7	6.6	68.0	10.0
		0.650 (16.5)	1.811 (46.0)	0.032 (0.8)	B	12	5.1	40.8	6.0
8.20	825	0.886 (22.5)	1.299 (33.0)	0.032 (0.8)	A	7	7.0	82.0	10.0
		0.724 (18.4)	1.811 (46.0)	0.032 (0.8)	B	10	5.9	49.2	6.0
10.0	106	0.969 (24.6)	1.299 (33.0)	0.032 (0.8)	A	7	7.5	100.0	10.0
		0.791 (20.1)	1.811 (46.0)	0.032 (0.8)	B	8	7.0	60.0	6.0
12.0	126	0.858 (21.8)	1.811 (46.0)	0.032 (0.8)	A	7	7.9	72.0	6.0
15.0	156	0.953 (24.2)	1.811 (46.0)	0.032 (0.8)	A	7	8.4	90.0	6.0
18.0	186	1.043 (26.5)	1.811 (46.0)	0.040 (1.0)	A	7	8.9	108.0	6.0
20.0	206	1.094 (27.8)	1.811 (46.0)	0.040 (1.0)	A	7	9.2	120.0	6.0
22.0	226	1.142 (29.0)	1.811 (46.0)	0.040 (1.0)	A	7	9.4	132.0	6.0
25.0	256	1.213 (30.8)	1.811 (46.0)	0.040 (1.0)	A	7	9.8	150.0	6.0
30.0	306	1.319 (33.5)	1.811 (46.0)	0.040 (1.0)	A	7	10.4	180.0	6.0
33.0	336	1.382 (35.1)	1.811 (46.0)	0.040 (1.0)	A	7	10.7	198.0	6.0
40.0	406	1.512 (38.4)	1.811 (46.0)	0.040 (1.0)	A	7	11.4	240.0	6.0

WVDC = 250 vdc / WVAC = 175 vac (Voltage Code 27)

Nominal Capacitance (µF)	Cap Code	Package Size (maximum)			Case Code	ESR (mΩ max @ 100 kHz & 25 °C)	I ripple (Arms max @ 100 KHz & 70 °C)	I peak (A)	dv / dt (V / µsec)
		D IN (mm)	L IN (mm)	d IN (mm)					
0.12	124	0.232 (5.9)	0.807 (20.5)	0.032 (0.8)	A	60	0.9	3.7	31.0
0.15	154	0.252 (6.4)	0.807 (20.5)	0.032 (0.8)	A	47	1.0	4.7	31.0
0.18	184	0.272 (6.9)	0.807 (20.5)	0.032 (0.8)	A	39	1.2	5.6	31.0
0.22	224	0.295 (7.5)	0.807 (20.5)	0.032 (0.8)	A	32	1.4	6.8	31.0
0.27	274	0.319 (8.1)	0.807 (20.5)	0.032 (0.8)	A	26	1.6	8.4	31.0
0.33	334	0.350 (8.9)	0.807 (20.5)	0.032 (0.8)	A	22	1.8	10.2	31.0
0.39	394	0.374 (9.5)	0.807 (20.5)	0.032 (0.8)	A	18	2.1	12.1	31.0
0.47	474	0.406 (10.3)	0.807 (20.5)	0.032 (0.8)	A	15	2.4	14.6	31.0
0.56	564	0.449 (11.4)	0.807 (20.5)	0.032 (0.8)	A	13	2.8	17.4	31.0
0.68	684	0.488 (12.4)	0.807 (20.5)	0.032 (0.8)	A	10	3.3	21.1	31.0
0.82	824	0.531 (13.5)	0.807 (20.5)	0.032 (0.8)	A	9	3.7	25.4	31.0
1.0	105	0.583 (14.8)	0.807 (20.5)	0.032 (0.8)	A	8	4.2	31.0	31.0
		0.409 (10.4)	1.299 (33.0)	0.032 (0.8)	B	29	2.2	12.5	12.5
1.2	125	0.453 (11.5)	1.299 (33.0)	0.032 (0.8)	A	24	2.5	15.0	12.5
1.5	155	0.496 (12.6)	1.299 (33.0)	0.032 (0.8)	A	19	3.0	18.8	12.5
1.8	185	0.535 (13.6)	1.299 (33.0)	0.032 (0.8)	A	16	3.4	22.5	12.5
2.0	205	0.563 (14.3)	1.299 (33.0)	0.032 (0.8)	A	15	3.6	25.0	12.5
2.2	225	0.587 (14.9)	1.299 (33.0)	0.032 (0.8)	A	13	4.0	27.5	12.5
2.5	255	0.622 (15.8)	1.299 (33.0)	0.032 (0.8)	A	12	4.3	31.3	12.5
2.7	275	0.642 (16.3)	1.299 (33.0)	0.032 (0.8)	A	11	4.6	33.8	12.5
3.0	305	0.673 (17.1)	1.299 (33.0)	0.032 (0.8)	A	10	5.0	37.5	12.5
3.3	335	0.720 (18.3)	1.299 (33.0)	0.032 (0.8)	A	9	5.4	41.3	12.5
4.0	405	0.787 (20.0)	1.299 (33.0)	0.032 (0.8)	A	8	6.1	50.0	12.5
4.7	475	0.846 (21.5)	1.299 (33.0)	0.032 (0.8)	A	7	6.8	58.8	12.5
5.0	505	0.870 (22.1)	1.299 (33.0)	0.032 (0.8)	A	7	6.9	62.5	12.5
5.6	565	0.917 (23.3)	1.299 (33.0)	0.032 (0.8)	A	7	7.2	70.0	12.5
6.8	685	1.004 (25.5)	1.299 (33.0)	0.032 (0.8)	A	7	7.6	85.0	12.5
		0.819 (20.8)	1.811 (46.0)	0.032 (0.8)	B	10	6.4	51.0	7.5
8.2	825	0.886 (22.5)	1.811 (46.0)	0.032 (0.8)	A	8	7.5	61.5	7.5
10.0	106	0.980 (24.9)	1.811 (46.0)	0.032 (0.8)	A	7	8.6	75.0	7.5
12.0	126	1.067 (27.1)	1.811 (46.0)	0.040 (1.0)	A	7	9.0	90.0	7.5
15.0	156	1.181 (30.0)	1.811 (46.0)	0.040 (1.0)	A	7	9.6	112.5	7.5
		1.020 (25.9)	2.310 (58.7)	0.040 (1.0)	B	8	9.1	63.0	4.2
18.0	186	1.287 (32.7)	1.811 (46.0)	0.040 (1.0)	A	7	10.2	135.0	7.5
		1.110 (28.2)	2.310 (58.7)	0.040 (1.0)	B	7	10.2	75.6	4.2
20.0	206	1.350 (34.3)	1.811 (46.0)	0.040 (1.0)	A	7	10.5	150.0	7.5
		1.165 (29.6)	2.310 (58.7)	0.040 (1.0)	B	7	10.6	84.0	4.2
22.0	226	1.220 (31)	2.310 (58.7)	0.040 (1.0)	A	7	10.8	92.4	4.2
25.0	256	1.291 (32.8)	2.310 (58.7)	0.040 (1.0)	A	7	11.3	105.0	4.2
30.0	306	1.409 (35.8)	2.310 (58.7)	0.040 (1.0)	A	7	11.9	126.0	4.2
33.0	336	1.472 (37.4)	2.310 (58.7)	0.040 (1.0)	A	7	12.3	138.6	4.2
40.0	406	1.614 (41.0)	2.310 (58.7)	0.040 (1.0)	A	7	13.0	168.0	4.2

WVDC = 400 vdc / WVAC = 250 vac (Voltage Code 40)

Nominal Capacitance (µF)	Cap Code	Package Size (maximum)			Case Code	ESR (mΩ max @ 100 kHz & 25 °C)	I ripple (Arms max @ 100 KHz & 70 °C)	I peak (A)	dv / dt (V / µsec)
		D IN (mm)	L IN (mm)	d IN (mm)					
0.15	154	0.343 (8.7)	1.102 (28.0)	0.032 (0.8)	A	40	1.5	3.2	21.0
0.18	184	0.369 (9.4)	1.102 (28.0)	0.032 (0.8)	A	36	1.6	3.8	21.0
0.22	224	0.400 (10.2)	1.102 (28.0)	0.032 (0.8)	A	25	2.1	4.6	21.0
0.27	274	0.446 (11.3)	1.102 (28.0)	0.032 (0.8)	A	23	2.3	5.7	21.0
0.33	334	0.485 (12.3)	1.102 (28.0)	0.032 (0.8)	A	20	2.6	6.9	21.0
0.39	394	0.521 (13.2)	1.102 (28.0)	0.032 (0.8)	A	17	2.9	8.2	21.0
0.47	474	0.565 (14.4)	1.102 (28.0)	0.032 (0.8)	A	13	3.5	9.9	21.0
		0.349 (8.9)	1.299 (33.0)	0.032 (0.8)	B	20	2.4	7.1	15.0
0.56	564	0.374 (9.5)	1.299 (33.0)	0.032 (0.8)	A	17	2.7	8.4	15.0
0.68	684	0.394 (10.0)	1.299 (33.0)	0.032 (0.8)	A	14	3.1	10.2	15.0
0.82	824	0.449 (11.4)	1.299 (33.0)	0.032 (0.8)	A	12	3.5	12.3	15.0
1.0	105	0.472 (12.0)	1.299 (33.0)	0.032 (0.8)	A	10	4.1	15.0	15.0
1.2	125	0.528 (13.4)	1.299 (33.0)	0.032 (0.8)	A	9	4.5	18.0	15.0
1.5	155	0.571 (14.5)	1.299 (33.0)	0.032 (0.8)	A	9	4.8	22.5	15.0
1.8	185	0.630 (16.0)	1.299 (33.0)	0.032 (0.8)	A	9	5.1	27.0	15.0
2.0	205	0.650 (16.5)	1.299 (33.0)	0.032 (0.8)	A	9	5.2	30.0	15.0
2.2	225	0.689 (17.5)	1.299 (33.0)	0.032 (0.8)	A	8	5.7	33.0	15.0
2.5	255	0.728 (18.5)	1.299 (33.0)	0.032 (0.8)	A	8	5.9	37.5	15.0
2.7	275	0.776 (19.7)	1.299 (33.0)	0.032 (0.8)	A	8	6.0	40.5	15.0
3.0	305	0.787 (20.0)	1.299 (33.0)	0.032 (0.8)	A	8	6.2	45.0	15.0
		0.646 (16.4)	1.811 (46.0)	0.032 (0.8)	B	9	5.9	27.0	9.0
3.3	335	0.850 (21.6)	1.299 (33.0)	0.032 (0.8)	A	7	6.8	49.5	15.0
		0.677 (17.2)	1.811 (46.0)	0.032 (0.8)	B	8	6.4	29.7	9.0
4.0	405	0.929 (23.6)	1.299 (33.0)	0.032 (0.8)	A	7	7.3	60.0	15.0
		0.760 (19.3)	1.811 (46.0)	0.032 (0.8)	B	7	7.3	36.0	9.0
4.7	475	1.016 (25.8)	1.299 (33.0)	0.040 (1.0)	A	7	7.7	70.5	15.0
		0.815 (20.7)	1.811 (46.0)	0.040 (1.0)	B	7	7.6	42.3	9.0
5.0	505	0.839 (21.3)	1.811 (46.0)	0.040 (1.0)	A	7	7.7	45.0	9.0
5.6	565	0.882 (22.4)	1.811 (46.0)	0.040 (1.0)	A	7	8.0	50.4	9.0
6.8	685	0.972 (24.7)	1.811 (46.0)	0.040 (1.0)	A	7	8.5	61.2	9.0
		0.843 (21.4)	2.310 (58.7)	0.040 (1.0)	B	7	8.6	34.0	5.0
8.2	825	1.059 (26.9)	1.811 (46.0)	0.040 (1.0)	A	7	9.0	73.8	9.0
		0.917 (23.3)	2.310 (58.7)	0.040 (1.0)	B	7	9.1	41.0	5.0
10.0	106	1.161 (29.5)	1.811 (46.0)	0.040 (1.0)	A	7	9.5	90.0	9.0
		1.004 (25.5)	2.310 (58.7)	0.040 (1.0)	B	7	9.6	50.0	5.0
12.0	126	1.260 (32.0)	1.811 (46.0)	0.040 (1.0)	A	7	10.1	108.0	9.0
		1.091 (27.7)	2.283 (58.0)	0.040 (1.0)	B	7	10.1	60.0	5.0
15.0	156	1.402 (35.6)	1.811 (46.0)	0.040 (1.0)	A	7	10.8	135.0	9.0
		1.209 (30.7)	2.310 (58.7)	0.040 (1.0)	B	7	10.8	75.0	5.0
18.0	186	1.315 (33.4)	2.310 (58.7)	0.040 (1.0)	A	7	11.4	162.0	5.0
20.0	206	1.382 (35.1)	2.310 (58.7)	0.040 (1.0)	A	7	11.8	100.0	5.0

WVDC = 400 vdc / WVAC = 250 vac (Voltage Code 40)

Nominal Capacitance (µF)	Cap Code	Package Size (maximum)			Case Code	ESR (mΩ max @ 100 kHz & 25 °C)	I ripple (Arms max @ 100 KHz & 70 °C)	I peak (A)	dv / dt (V / µsec)
		D IN (mm)	L IN (mm)	d IN (mm)					
22.0	226	1.445 (36.7)	2.310 (58.7)	0.040 (1.0)	A	7	12.1	110.0	5.0
25.0	256	1.535 (39.0)	2.310 (58.7)	0.040 (1.0)	A	7	12.6	125.0	5.0
30.0	306	1.674 (42.5)	2.310 (58.7)	0.040 (1.0)	A	7	13.3	150.0	5.0
33.0	336	1.425 (36.2)	3.311 (84.1)	0.040 (1.0)	A	7	13.9	82.5	2.5

WVDC = 600 vdc / WVAC = 330 vac (Voltage Code 60)

Nominal Capacitance (µF)	Cap Code	Package Size (maximum)			Case Code	ESR (mΩ max @ 100 kHz & 25 °C)	I ripple (Arms max @ 100 KHz & 70 °C)	I peak (A)	dv / dt (V / µsec)
		D IN (mm)	L IN (mm)	d IN (mm)					
0.15	154	0.330 (8.4)	1.102 (28.0)	0.032 (0.8)	A	40	1.4	4.2	28.0
0.18	184	0.356 (9.0)	1.102 (28.0)	0.032 (0.8)	A	36	1.6	5.0	28.0
0.22	224	0.400 (10.2)	1.102 (28.0)	0.032 (0.8)	A	25	2.1	6.2	28.0
0.27	274	0.446 (11.3)	1.102 (28.0)	0.032 (0.8)	A	23	2.3	7.6	28.0
0.33	334	0.485 (12.3)	1.102 (28.0)	0.032 (0.8)	A	20	2.6	9.2	28.0
0.39	394	0.521 (13.2)	1.102 (28.0)	0.032 (0.8)	A	17	2.9	10.9	28.0
		0.426 (10.8)	1.299 (33.0)	0.032 (0.8)	B	22	2.6	7.8	20.0
0.47	474	0.565 (14.4)	1.102 (28.0)	0.032 (0.8)	A	13	3.5	13.2	28.0
		0.471 (12.0)	1.299 (33.0)	0.032 (0.8)	B	17	3.1	9.4	20.0
0.56	564	0.507 (12.9)	1.299 (33.0)	0.032 (0.8)	A	15	3.4	11.2	20.0
0.68	684	0.552 (14.0)	1.299 (33.0)	0.032 (0.8)	A	12	4.0	13.6	20.0
0.82	824	0.599 (15.2)	1.299 (33.0)	0.032 (0.8)	A	11	4.4	16.4	20.0
1.0	105	0.655 (16.6)	1.299 (33.0)	0.032 (0.8)	A	10	4.9	20.0	20.0
1.2	125	0.731 (18.6)	1.299 (33.0)	0.032 (0.8)	A	9	5.5	24.0	20.0
1.5	155	0.807 (20.5)	1.299 (33.0)	0.032 (0.8)	A	8	6.2	30.0	20.0
		0.642 (16.3)	1.811 (46.0)	0.032 (0.8)	B	13	4.9	19.5	13.0
1.8	185	0.877 (22.3)	1.299 (33.0)	0.032 (0.8)	A	7	7.0	23.4	13.0
		0.715 (18.2)	1.811 (46.0)	0.032 (0.8)	B	11	5.6	23.4	13.0
2.0	205	0.927 (23.5)	1.299 (33.0)	0.032 (0.8)	A	7	7.2	40.0	20.0
		0.748 (19.0)	1.811 (46.0)	0.032 (0.8)	B	10	6.0	26.0	13.0
2.2	225	0.780 (19.8)	1.811 (46.0)	0.032 (0.8)	A	9	6.5	28.6	13.0
2.5	255	0.825 (21.0)	1.811 (46.0)	0.032 (0.8)	A	8	7.2	32.5	13.0
2.7	275	0.854 (21.7)	1.811 (46.0)	0.040 (1.0)	A	8	7.3	35.1	13.0
3.0	305	0.895 (22.7)	1.811 (46.0)	0.040 (1.0)	A	7	8.1	39.0	13.0
		0.772 (19.6)	2.310 (58.7)	0.040 (1.0)	B	12	6.2	21.0	7.0
3.3	335	0.934 (23.7)	1.811 (46.0)	0.040 (1.0)	A	7	8.3	42.9	13.0
		0.805 (20.4)	2.310 (58.7)	0.040 (1.0)	B	11	6.7	23.1	7.0
4.0	405	1.019 (25.9)	1.811 (46.0)	0.040 (1.0)	A	7	8.8	52.0	13.0
		0.876 (22.3)	2.310 (58.7)	0.040 (1.0)	B	9	7.8	28.0	7.0
4.7	475	1.097 (27.9)	1.811 (46.0)	0.040 (1.0)	A	7	9.2	61.1	13.0
		0.942 (23.9)	2.310 (58.7)	0.040 (1.0)	B	9	8.1	32.9	7.0
5.0	505	1.129 (28.7)	1.811 (46.0)	0.040 (1.0)	A	7	9.4	65.0	13.0
		0.969 (24.6)	2.310 (58.7)	0.040 (1.0)	B	8	8.8	35.0	7.0

WVDC = 600 vdc / WVAC = 330 vac (Voltage Code 60)

Nominal Capacitance (µF)	Cap Code	Package Size (maximum)			Case Code	ESR (mΩ max @ 100 kHz & 25 °C)	I ripple (Arms max @ 100 KHz & 70 °C)	I peak (A)	dv / dt (V / µsec)
		D IN (mm)	L IN (mm)	d IN (mm)					
5.6	565	1.190 (30.2)	1.811 (46.0)	0.040 (1.0)	A	7	9.7	72.8	13.0
		1.020 (25.9)	2.310 (58.7)	0.040 (1.0)	B	8	9.1	39.2	7.0
6.8	685	1.303 (33.1)	1.811 (46.0)	0.040 (1.0)	A	7	10.3	88.4	13.0
		1.115 (28.3)	2.310 (58.7)	0.040 (1.0)	B	7	10.3	47.6	7.0
8.2	825	1.216 (30.9)	2.310 (58.7)	0.040 (1.0)	A	7	10.8	57.4	7.0
10.0	106	1.334 (33.9)	2.310 (58.7)	0.040 (1.0)	A	7	11.5	70.0	7.0
12.0	126	1.454 (37.0)	2.310 (58.7)	0.040 (1.0)	A	7	12.1	84.0	7.0
15.0	156	1.616 (41.1)	2.310 (58.7)	0.040 (1.0)	A	7	13.0	105.0	7.0
18.0	186	1.763 (44.8)	2.310 (58.7)	0.040 (1.0)	A	7	13.8	126.0	7.0
20.0	206	1.854 (47.1)	2.310 (58.7)	0.040 (1.0)	A	7	14.2	140.0	7.0

WVDC = 850 vdc / WVAC = 450 vac (Voltage Code 85)

Nominal Capacitance (µF)	Cap Code	Package Size (maximum)			Case Code	ESR (mΩ max @ 100 kHz & 25 °C)	I ripple (Arms max @ 100 KHz & 70 °C)	I peak (A)	dv / dt (V / µsec)
		D IN (mm)	L IN (mm)	d IN (mm)					
0.12	124	0.366 (9.3)	1.299 (33.0)	0.032 (0.8)	A	47	1.4	3.6	30.0
0.15	154	0.394 (10.0)	1.299 (33.0)	0.032 (0.8)	A	38	1.6	4.5	30.0
0.18	184	0.442 (11.3)	1.299 (33.0)	0.032 (0.8)	A	32	1.9	5.4	30.0
0.22	224	0.472 (12.0)	1.299 (33.0)	0.032 (0.8)	A	26	2.2	6.6	30.0
0.27	274	0.525 (13.4)	1.299 (33.0)	0.032 (0.8)	A	21	2.6	8.1	30.0
0.33	334	0.571 (14.5)	1.299 (33.0)	0.032 (0.8)	A	17	3.0	9.9	30.0
0.39	394	0.617 (15.7)	1.299 (33.0)	0.032 (0.8)	A	15	3.3	11.7	30.0
0.47	474	0.669 (17.0)	1.299 (33.0)	0.032 (0.8)	A	12	3.9	14.1	30.0
0.56	564	0.747 (19.0)	1.299 (33.0)	0.032 (0.8)	A	11	4.3	16.8	30.0
0.68	684	0.807 (20.5)	1.299 (33.0)	0.032 (0.8)	A	9	5.1	20.4	30.0
		0.646 (16.4)	1.811 (46.0)	0.032 (0.8)	B	20	3.4	12.9	19.0
0.82	824	0.823 (20.9)	1.299 (33.0)	0.032 (0.8)	A	8	5.7	24.6	30.0
		0.723 (18.4)	1.811 (46.0)	0.032 (0.8)	B	17	3.9	15.6	19.0
1.0	105	0.976 (24.8)	1.299 (33.0)	0.032 (0.8)	A	8	6.1	30.0	30.0
		0.807 (20.5)	1.811 (46.0)	0.032 (0.8)	B	14	4.6	19.0	19.0
1.2	125	0.854 (21.7)	1.811 (46.0)	0.040 (1.0)	A	11	5.4	22.8	19.0
1.5	155	0.965 (24.5)	1.811 (46.0)	0.040 (1.0)	A	9	6.4	28.5	19.0
1.8	185	1.025 (26.1)	1.811 (46.0)	0.040 (1.0)	A	8	7.1	34.2	19.0
2.0	205	1.122 (28.5)	1.811 (46.0)	0.040 (1.0)	A	7	7.9	38.0	19.0
2.2	225	1.161 (29.5)	1.811 (46.0)	0.040 (1.0)	A	7	8.1	41.8	19.0
2.5	255	1.240 (31.5)	1.811 (46.0)	0.040 (1.0)	A	7	8.4	47.5	19.0
2.7	275	1.236 (31.4)	1.811 (46.0)	0.040 (1.0)	A	7	8.6	51.3	19.0
3.0	305	1.299 (33.0)	1.811 (46.0)	0.040 (1.0)	A	7	8.9	57.0	19.0
		1.102 (28.0)	2.310 (58.7)	0.040 (1.0)	B	9	7.8	30.0	10.0
3.3	335	1.161 (29.5)	2.310 (58.7)	0.040 (1.0)	A	8	8.5	33.0	10.0
4.0	405	1.280 (32.5)	2.310 (58.7)	0.040 (1.0)	A	7	9.7	40.0	10.0
4.7	475	1.370 (34.8)	2.310 (58.7)	0.040 (1.0)	A	7	10.1	47.0	10.0
5.0	505	1.410 (35.8)	2.310 (58.7)	0.040 (1.0)	A	7	10.3	50.0	10.0

AFPT Electrical/Mechanical Characteristics:

WVDC = 250 vdc / WVAC = 140 vac (Voltage Code 24)

Nominal Capacitance (µF)	Cap Code	Package Size (maximum)				Case Code	ESR (mΩ max @ 100 kHz & 25 °C)	I ripple (Arms max @ 100 KHz & 70 °C)	I peak (A)	dv / dt (V / µsec)
		T IN (mm)	H IN (mm)	L IN (mm)	d IN (mm)					
0.33	334	0.210 (5.3)	0.322 (8.2)	0.807 (20.5)	0.032 (0.8)	A	27	1.5	8.3	25.0
0.39	394	0.246 (6.3)	0.357 (9.1)	0.807 (20.5)	0.032 (0.8)	A	23	1.6	9.8	25.0
0.47	474	0.272 (6.9)	0.381 (9.7)	0.807 (20.5)	0.032 (0.8)	A	19	1.9	11.8	25.0
0.56	564	0.298 (7.6)	0.407 (10.3)	0.807 (20.5)	0.032 (0.8)	A	16	2.2	14.0	25.0
0.68	684	0.331 (8.4)	0.438 (11.1)	0.807 (20.5)	0.032 (0.8)	A	13	2.5	17.0	25.0
0.82	824	0.335 (8.5)	0.501 (12.7)	0.807 (20.5)	0.032 (0.8)	A	11	2.9	20.5	25.0
1.0	105	0.384 (9.8)	0.549 (13.9)	0.807 (20.5)	0.032 (0.8)	A	9	3.4	25.0	25.0
1.2	125	0.424 (10.8)	0.588 (14.9)	0.807 (20.5)	0.032 (0.8)	A	8	3.8	30.0	25.0
1.5	155	0.552 (14.0)	0.650 (16.5)	0.807 (20.5)	0.032 (0.8)	A	8	4.1	37.5	25.0
		0.300 (7.6)	0.468 (11.9)	1.299 (33.0)	0.032 (0.8)	B	24	2.4	15.0	10.0
1.8	185	0.333 (8.5)	0.499 (12.7)	1.299 (33.0)	0.032 (0.8)	A	20	2.7	18.0	10.0
2.0	205	0.363 (9.2)	0.529 (13.4)	1.299 (33.0)	0.032 (0.8)	A	18	2.9	20.0	10.0
2.2	225	0.383 (9.7)	0.548 (13.9)	1.299 (33.0)	0.032 (0.8)	A	16	3.2	22.0	10.0
2.5	255	0.411 (10.4)	0.574 (14.6)	1.299 (33.0)	0.032 (0.8)	A	15	3.4	25.0	10.0
2.7	275	0.399 (10.1)	0.622 (15.8)	1.299 (33.0)	0.032 (0.8)	A	13	3.7	27.0	10.0
3.0	305	0.424 (10.8)	0.646 (16.4)	1.299 (33.0)	0.032 (0.8)	A	12	4.0	30.0	10.0
3.3	335	0.447 (11.4)	0.669 (17.0)	1.299 (33.0)	0.032 (0.8)	A	9	4.3	33.0	10.0
4.0	405	0.499 (12.7)	0.719 (18.3)	1.299 (33.0)	0.032 (0.8)	A	8	5.0	40.0	10.0
4.7	475	0.547 (13.9)	0.764 (19.4)	1.299 (33.0)	0.032 (0.8)	A	7	5.6	47.0	10.0
5.0	505	0.566 (14.4)	0.783 (19.9)	1.299 (33.0)	0.032 (0.8)	A	7	6.1	50.0	10.0
5.6	565	0.603 (15.3)	0.819 (20.8)	1.299 (33.0)	0.032 (0.8)	A	7	6.3	56.0	10.0
6.8	685	0.682 (17.3)	0.895 (22.7)	1.299 (33.0)	0.032 (0.8)	A	7	6.6	68.0	10.0
8.2	825	0.563 (14.3)	0.839 (21.3)	1.810 (46.0)	0.032 (0.8)	A	10	5.9	82.0	10.0
10.0	106	0.631 (16.0)	0.905 (23.0)	1.810 (46.0)	0.040 (1.0)	A	8	7.0	60.0	6.0
12.0	126	0.669 (17.0)	1.001 (25.4)	1.810 (46.0)	0.040 (1.0)	A	7	7.9	72.0	6.0
15.0	156	0.762 (19.4)	1.091 (27.7)	1.810 (46.0)	0.040 (1.0)	A	7	8.4	90.0	6.0
18.0	186	0.786 (20.0)	1.232 (31.3)	1.810 (46.0)	0.040 (1.0)	A	7	8.9	108.0	6.0
20.0	206	0.839 (21.3)	1.283 (32.6)	1.810 (46.0)	0.040 (1.0)	A	7	9.2	120.0	6.0

WWDC = 250 vdc / WWAC = 175 vac (Voltage Code 27)

Nominal Capacitance (µF)	Cap Code	Package Size (maximum)				Case Code	ESR (mΩ max @ 100 kHz & 25 °C)	I ripple (Arms max @ 100 KHz & 70 °C)	I peak (A)	dv / dt (V / µsec)
		T IN (mm)	H IN (mm)	L IN (mm)	d IN (mm)					
0.33	334	0.288 (7.3)	0.397 (10.1)	0.807 (20.5)	0.032 (0.8)	A	22	1.8	10.2	31.0
0.39	394	0.315 (8.0)	0.422 (10.7)	0.807 (20.5)	0.032 (0.8)	A	18	2.1	12.1	31.0
0.47	474	0.317 (8.1)	0.494 (12.6)	0.807 (20.5)	0.032 (0.8)	A	15	2.4	14.6	31.0
0.56	564	0.360 (9.2)	0.526 (13.4)	0.807 (20.5)	0.032 (0.8)	A	13	2.8	17.4	31.0
0.68	684	0.390 (9.9)	0.564 (14.3)	0.807 (20.5)	0.032 (0.8)	A	10	3.3	21.1	31.0
0.82	824	0.433 (11.0)	0.606 (15.4)	0.807 (20.5)	0.032 (0.8)	A	9	3.7	25.4	31.0
1.0	105	0.504 (12.8)	0.664 (16.9)	0.807 (20.5)	0.032 (0.8)	A	8	4.2	31.0	31.0
1.2	125	0.353 (8.97)	0.519 (13.2)	1.299 (33.0)	0.032 (0.8)	A	24	2.5	37.2	31.0
1.5	155	0.399 (10.1)	0.563 (14.3)	1.299 (33.0)	0.032 (0.8)	A	19	3.0	18.8	12.5
1.8	185	0.441 (11.2)	0.603 (15.3)	1.299 (33.0)	0.032 (0.8)	A	16	3.4	22.5	12.5
2.0	205	0.477 (12.1)	0.638 (16.2)	1.299 (33.0)	0.032 (0.8)	A	15	3.6	25.0	12.5
2.2	225	0.501 (12.7)	0.662 (16.8)	1.299 (33.0)	0.032 (0.8)	A	13	4.0	27.5	12.5
2.5	255	0.505 (12.8)	0.725 (18.4)	1.299 (33.0)	0.032 (0.8)	A	12	4.3	31.3	12.5
2.7	275	0.528 (13.4)	0.746 (18.9)	1.299 (33.0)	0.032 (0.8)	A	11	4.6	33.8	12.5
3.0	305	0.509 (12.9)	0.777 (19.7)	1.299 (33.0)	0.032 (0.8)	A	10	5.0	37.5	12.5
3.3	335	0.589 (15.0)	0.806 (20.5)	1.299 (33.0)	0.032 (0.8)	A	9	5.4	41.3	12.5
4.0	405	0.624 (15.8)	0.898 (22.8)	1.299 (33.0)	0.032 (0.8)	A	8	6.1	50.0	12.5
4.7	475	0.654 (16.6)	0.987 (25.1)	1.299 (33.0)	0.032 (0.8)	A	7	6.8	58.8	12.5
5.0	505	0.678 (17.2)	1.010 (25.7)	1.299 (33.0)	0.032 (0.8)	A	7	6.9	62.5	12.5
5.6	565	0.724 (18.4)	1.054 (26.8)	1.299 (33.0)	0.032 (0.8)	A	7	7.2	70.0	12.5
6.8	685	0.810 (20.6)	1.136 (28.9)	1.299 (33.0)	0.032 (0.8)	A	7	7.6	85.0	12.5
		0.825 (15.9)	0.959 (24.4)	1.810 (46.0)	0.040 (1.0)	B	10	6.4	51.0	7.5
8.2	825	0.698 (17.7)	1.028 (26.1)	1.810 (46.0)	0.040 (1.0)	A	8	7.5	61.5	7.5
10.0	106	0.782 (19.9)	1.110 (28.2)	1.810 (46.0)	0.040 (1.0)	A	7	8.6	75.0	7.5
12.0	126	0.869 (22.1)	1.193 (30.3)	1.810 (46.0)	0.040 (1.0)	A	7	9.0	90.0	7.5
15.0	156	0.924 (23.5)	1.365 (34.7)	1.810 (46.0)	0.040 (1.0)	A	7	9.6	112.5	7.5
		0.824 (20.9)	1.149 (29.2)	2.310 (58.7)	0.040 (1.0)	B	8	9.1	28.6	4.2
18.0	186	0.854 (21.7)	1.297 (32.9)	2.310 (58.7)	0.040 (1.0)	A	7	10.2	75.6	4.2
20.0	206	0.909 (23.1)	1.350 (34.3)	2.310 (58.7)	0.040 (1.0)	A	7	10.6	84.0	4.2
22.0	226	0.962 (24.4)	1.401 (35.6)	2.310 (58.7)	0.040 (1.0)	A	7	10.8	92.4	4.2

WVDC = 400 vdc / WVAC = 250 vac (Voltage Code 40)

Nominal Capacitance (µF)	Cap Code	Package Size (maximum)				Case Code	ESR (mΩ max @ 100 kHz & 25 °C)	I ripple (Arms max @ 100 KHz & 70 °C)	I peak (A)	dv / dt (V / µsec)
		T IN (mm)	H IN (mm)	L IN (mm)	d IN (mm)					
0.22	224	0.334 (8.5)	0.441 (11.2)	1.102 (28.0)	0.032 (0.8)	A	25	2.1	4.6	21.0
0.27	274	0.351 (8.9)	0.517 (13.1)	1.102 (28.0)	0.032 (0.8)	A	23	2.3	5.7	21.0
0.33	334	0.391 (9.9)	0.556 (14.1)	1.102 (28.0)	0.032 (0.8)	A	20	2.6	6.9	21.0
0.39	394	0.429 (10.9)	0.592 (15.0)	1.102 (28.0)	0.032 (0.8)	A	17	2.9	8.2	21.0
0.47	474	0.444 (11.3)	0.667 (16.9)	1.102 (28.0)	0.032 (0.8)	A	13	3.5	9.9	21.0
0.56	564	0.500 (12.7)	0.720 (18.3)	1.102 (28.0)	0.032 (0.8)	A	13	3.7	11.8	21.0
0.68	684	0.557 (14.1)	0.774 (19.7)	1.102 (28.0)	0.032 (0.8)	A	12	4.1	14.3	21.0
0.82	824	0.351 (8.9)	0.517 (13.1)	1.299 (33.0)	0.032 (0.8)	A	12	3.5	12.3	15.0
1.0	105	0.381 (9.7)	0.545 (13.8)	1.299 (33.0)	0.032 (0.8)	A	11	4.1	15.0	15.0
1.2	125	0.402 (10.2)	0.626 (15.9)	1.299 (33.0)	0.032 (0.8)	A	10	4.5	18.0	15.0
1.5	155	0.467 (11.9)	0.688 (17.5)	1.299 (33.0)	0.032 (0.8)	A	9	4.8	22.5	15.0
1.8	185	0.517 (13.1)	0.736 (18.7)	1.299 (33.0)	0.032 (0.8)	A	9	5.1	27.0	15.0
2.0	205	0.548 (13.9)	0.766 (19.5)	1.299 (33.0)	0.032 (0.8)	A	9	5.2	30.0	15.0
2.2	225	0.577 (14.7)	0.794 (20.2)	1.299 (33.0)	0.032 (0.8)	A	8	5.7	33.0	15.0
2.5	255	0.619 (15.7)	0.834 (21.2)	1.299 (33.0)	0.032 (0.8)	A	8	5.9	37.5	15.0
2.7	275	0.615 (15.6)	0.890 (22.6)	1.299 (33.0)	0.032 (0.8)	A	8	6.0	40.5	15.0
3.0	305	0.684 (17.4)	0.897 (22.8)	1.299 (33.0)	0.032 (0.8)	A	8	6.2	45.0	15.0
3.3	335	0.721 (18.3)	0.932 (23.7)	1.299 (33.0)	0.032 (0.8)	A	7	6.8	49.5	15.0
4.0	405	0.627 (15.9)	0.842 (21.4)	1.810 (46.0)	0.032 (0.8)	A	7	7.3	36.0	9.0
4.7	475	0.685 (17.4)	0.898 (22.8)	1.810 (46.0)	0.040 (1.0)	A	7	7.6	42.3	9.0
5.0	505	0.709 (18.0)	0.920 (23.4)	1.810 (46.0)	0.040 (1.0)	A	7	7.7	45.0	9.0
5.6	565	0.692 (17.6)	1.023 (26.0)	1.810 (46.0)	0.040 (1.0)	A	7	8.0	50.4	9.0
6.8	685	0.774 (19.7)	1.102 (28.0)	1.810 (46.0)	0.040 (1.0)	A	7	8.5	61.2	9.0
		0.645 (16.4)	0.978 (24.8)	2.310 (58.7)	0.040 (1.0)	B	7	8.6	34.0	5.0
8.2	825	0.863 (21.9)	1.187 (30.1)	1.810 (46.0)	0.040 (1.0)	A	7	9.0	73.8	9.0
		0.719 (18.3)	1.049 (26.6)	2.310 (58.7)	0.040 (1.0)	B	7	9.1	41.0	5.0
10.0	106	0.807 (20.5)	1.133 (28.8)	2.310 (58.7)	0.040 (1.0)	A	7	9.6	40.0	5.0
12.0	126	0.835 (21.2)	1.279 (32.5)	2.310 (58.7)	0.040 (1.0)	A	7	10.1	60.0	5.0
15.0	156	0.953 (24.2)	1.393 (35.4)	2.310 (58.7)	0.040 (1.0)	A	7	10.8	75.0	5.0
18.0	186	1.062 (27.0)	1.497 (38.0)	2.310 (58.7)	0.040 (1.0)	A	7	11.4	162.0	5.0
20.0	206	1.129 (28.7)	1.560 (39.6)	2.310 (58.7)	0.040 (1.0)	A	7	11.8	100.0	5.0

WVDC = 600 vdc / WVAC = 330 vac (Voltage Code 60)

Nominal Capacitance (μF)	Cap Code	Package Size (maximum)				Case Code	ESR (mΩ max @ 100 kHz & 25 °C)	I ripple (Arms max @ 100 KHz & 70 °C)	I peak (A)	dv / dt (V / μsec)
		T IN (mm)	H IN (mm)	L IN (mm)	d IN (mm)					
0.22	224	0.334 (8.5)	0.441 (11.2)	1.102 (28.0)	0.032 (0.8)	A	25	2.1	6.2	28.0
0.27	274	0.351 (8.9)	0.517 (13.1)	1.102 (28.0)	0.032 (0.8)	A	23	2.3	7.6	28.0
0.33	334	0.391 (9.9)	0.556 (14.1)	1.102 (28.0)	0.032 (0.8)	A	20	2.6	9.2	28.0
0.39	394	0.429 (10.9)	0.592 (15.0)	1.102 (28.0)	0.032 (0.8)	A	17	2.9	10.9	28.0
0.47	474	0.444 (11.3)	0.667 (16.9)	1.102 (28.0)	0.032 (0.8)	A	13	3.5	13.2	28.0
0.56	564	0.500 (12.7)	0.720 (18.3)	1.102 (28.0)	0.032 (0.8)	A	13	3.7	15.7	28.0
		0.414 (10.5)	0.578 (14.7)	1.299 (33.0)	0.032 (0.8)	B	15	3.4	11.2	20.0
0.68	684	0.557 (14.1)	0.774 (19.7)	1.102 (28.0)	0.032 (0.8)	A	12	4.1	19.0	28.0
		0.430 (10.9)	0.652 (16.6)	1.299 (33.0)	0.032 (0.8)	B	12	4.0	13.6	20.0
0.82	824	0.488 (12.4)	0.708 (18.0)	1.299 (33.0)	0.032 (0.8)	A	11	4.4	16.4	20.0
1.0	105	0.545 (13.8)	0.763 (19.4)	1.299 (33.0)	0.032 (0.8)	A	10	4.9	20.0	20.0
1.2	125	0.602 (15.3)	0.818 (20.8)	1.299 (33.0)	0.032 (0.8)	A	9	5.5	24.0	20.0
1.5	155	0.620 (15.7)	0.953 (24.2)	1.299 (33.0)	0.032 (0.8)	A	8	6.2	30.0	20.0
1.8	185	0.689 (17.5)	1.020 (25.9)	1.299 (33.0)	0.032 (0.8)	A	7	7.0	36.0	20.0
2.0	205	0.611 (15.5)	0.826 (21.0)	1.810 (46.0)	0.032 (0.8)	A	10	6.0	26.0	13.0
2.2	225	0.613 (15.6)	0.888 (22.6)	1.810 (46.0)	0.040 (1.0)	A	9	6.5	28.6	13.0
2.5	255	0.659 (16.7)	0.932 (23.7)	1.810 (46.0)	0.040 (1.0)	A	8	7.2	32.5	13.0
2.7	275	0.658 (16.7)	0.990 (25.1)	1.810 (46.0)	0.040 (1.0)	A	8	7.3	35.1	13.0
3.0	305	0.700 (17.8)	1.030 (26.2)	1.810 (46.0)	0.040 (1.0)	A	7	8.1	39.0	13.0
3.3	335	0.739 (18.8)	1.068 (27.1)	1.810 (46.0)	0.040 (1.0)	A	7	8.3	42.9	13.0
		0.638 (16.2)	0.912 (23.2)	2.310 (58.7)	0.040 (1.0)	B	11	6.7	23.1	7.0
4.0	405	0.826 (21.0)	1.151 (29.2)	1.810 (46.0)	0.040 (1.0)	A	7	8.7	52.0	13.0
		0.681 (17.3)	1.013 (25.7)	2.310 (58.7)	0.040 (1.0)	B	9	7.8	28.0	7.0
4.7	475	0.748 (19.0)	1.076 (27.3)	2.310 (58.7)	0.040 (1.0)	A	9	8.1	32.9	7.0
5.0	505	0.775 (19.7)	1.102 (28.0)	2.310 (58.7)	0.040 (1.0)	A	8	8.8	35.0	7.0
5.6	565	0.827 (21.0)	1.152 (29.3)	2.310 (58.7)	0.040 (1.0)	A	8	9.1	39.2	7.0
6.8	685	0.863 (21.9)	1.306 (33.2)	2.310 (58.7)	0.040 (1.0)	A	7	10.3	47.6	7.0
8.2	825	0.964 (24.5)	1.403 (35.6)	2.310 (58.7)	0.040 (1.0)	A	7	10.8	57.4	7.0
10.0	106	1.083 (27.5)	1.517 (38.5)	2.310 (58.7)	0.040 (1.0)	A	7	11.5	70.0	7.0

WVDC = 850 vdc / WVAC = 450 vac (Voltage Code 85)

Nominal Capacitance (μF)	Cap Code	Package Size (maximum)				Case Code	ESR (mΩ max @ 100 kHz & 25 °C)	I ripple (Arms max @ 100 KHz & 70 °C)	I peak (A)	dv / dt (V / μsec)
		T IN (mm)	H IN (mm)	L IN (mm)	d IN (mm)					
0.15	154	0.308 (7.8)	0.475 (12.1)	1.299 (33.0)	0.032 (0.8)	A	38	1.6	4.5	30.0
0.18	184	0.351 (8.9)	0.517 (13.1)	1.299 (33.0)	0.032 (0.8)	A	32	1.9	5.4	30.0
0.22	224	0.391 (9.9)	0.555 (14.1)	1.299 (33.0)	0.032 (0.8)	A	26	2.2	6.6	30.0
0.27	274	0.436 (11.1)	0.599 (15.2)	1.299 (33.0)	0.032 (0.8)	A	21	2.6	8.1	30.0
0.33	334	0.465 (11.8)	0.687 (17.4)	1.299 (33.0)	0.032 (0.8)	A	17	3.0	9.9	30.0
0.39	394	0.510 (13.0)	0.730 (18.5)	1.299 (33.0)	0.032 (0.8)	A	15	3.3	11.7	30.0
0.47	474	0.565 (14.4)	0.782 (19.9)	1.299 (33.0)	0.032 (0.8)	A	12	3.9	14.1	30.0
0.56	564	0.591 (15.0)	0.867 (22.0)	1.299 (33.0)	0.032 (0.8)	A	11	4.3	16.8	30.0
0.68	684	0.660 (16.8)	0.932 (23.7)	1.299 (33.0)	0.032 (0.8)	A	9	5.1	20.4	30.0
0.82	824	0.702 (17.8)	1.033 (26.2)	1.299 (33.0)	0.032 (0.8)	A	8	5.7	24.6	30.0
1.0	105	0.787 (20.0)	1.114 (28.3)	1.299 (33.0)	0.032 (0.8)	A	8	6.1	30.0	30.0
		0.624 (15.8)	0.898 (22.8)	1.810 (46.0)	0.040 (1.0)	B	14	4.6	19.0	19.0
1.2	125	0.662 (16.8)	0.994 (25.2)	1.810 (46.0)	0.040 (1.0)	A	11	5.4	22.8	19.0
1.5	155	0.752 (19.1)	1.081 (27.5)	1.810 (46.0)	0.040 (1.0)	A	9	6.4	28.5	19.0
1.8	185	0.835 (21.2)	1.160 (29.5)	1.810 (46.0)	0.040 (1.0)	A	8	7.1	34.2	19.0
2.0	205	0.886 (22.5)	1.210 (30.7)	1.810 (46.0)	0.040 (1.0)	A	7	7.9	38.0	19.0
2.2	225	0.875 (22.2)	1.317 (33.5)	1.810 (46.0)	0.040 (1.0)	A	7	8.1	41.8	19.0
2.5	255	0.943 (24.0)	1.383 (35.1)	1.810 (46.0)	0.040 (1.0)	A	7	8.4	47.5	19.0
2.7	275	0.987 (25.1)	1.425 (36.2)	1.810 (46.0)	0.040 (1.0)	A	7	8.6	51.3	19.0
3.0	305	1.050 (26.7)	1.485 (37.7)	1.810 (46.0)	0.040 (1.0)	A	7	8.9	57.0	19.0
		0.862 (21.9)	1.305 (33.1)	2.310 (58.7)	0.040 (1.0)	B	9	7.8	30.0	10.0
3.3	335	1.110 (28.2)	1.542 (39.2)	1.810 (46.0)	0.040 (1.0)	A	7	9.1	62.7	19.0
		0.912 (23.2)	1.353 (34.4)	2.310 (58.7)	0.040 (1.0)	B	8	8.5	33.0	10.0
4.0	405	1.022 (26.0)	1.458 (37.0)	2.310 (58.7)	0.040 (1.0)	A	7	9.7	40.0	10.0
4.7	475	1.062 (27.0)	1.616 (41.0)	2.310 (58.7)	0.040 (1.0)	A	7	10.1	47.0	10.0
5.0	505	1.102 (28.0)	1.654 (42.0)	2.310 (58.7)	0.040 (1.0)	A	7	10.3	50.0	10.0

Aerovox®

167 John Vertente Blvd. New Bedford, MA 02745 USA TEL: (508) 994-9661 FAX: (508) 995-3000 www.aerovox.com