


RoHS COMPLIANT 515-1001F

Part Numbers with the "F" suffix ending are RoHS Compliant.
Packaging is marked with "RoHS Compliant" label or equivalent markings.


.719

[18.26]

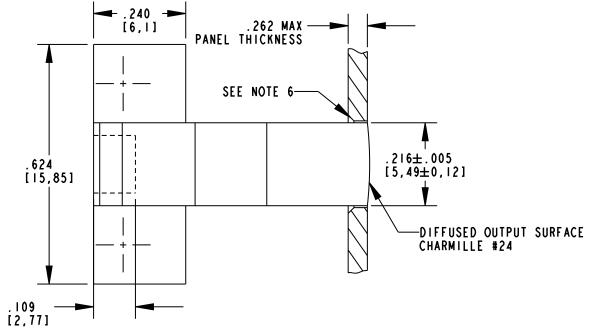

[0,15]

.118±.005 [3±0,12]

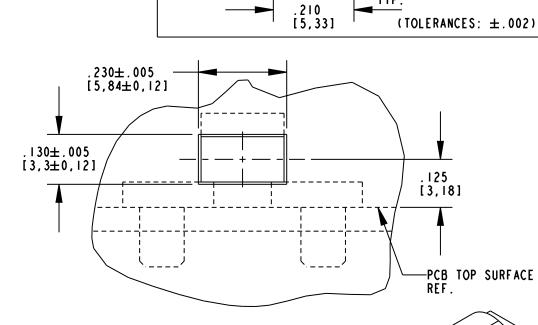

FRONT PANEL FOR DIRECT VIEW

SCALE: 4.000

ALL DIM'S IN: INCHES (MM)

TOLERANCES: UNLESS OTHERWISE SPECIFIED

FRACTIONS: ±1/64

ANGLES: ±3°

FINISH:

FSCM

DECIMALS (.XX): ±.02

DECIMALS (.XXX): ±.010

83330

REV

ECN NO

.043

[1,09]

 \emptyset , 113

[2,87]

DIRECTION

OF LIGHT

ŤΥΡ,

TYP,

REVISIONS

NEW RELEASE

. 050

[1,26]

[1,5]

TYP,

SCALE 2.000

THIS DRAWING AND THE CONTENTS HEREIN ARE CONFIDENTIAL AND THE SOLE PROPERTY OF DIALIGHT. REPRODUCTION OF THIS DRAWING OR CONSTRUCTION OF ANY PARTS WITHIN THIS DRAWING ARE FORBIDDEN WITHOUT THE WRITTEN CONSENT OF DIALIGHT.

C-17855

SHEET I OF I FAMILY TABLE:

3 ELEMENT LIGHTPIPE

SEE NOTES

DRAWING NUMBER

TITLE

MATERIAL

RECOMMENDED HOLE PATTERN GAUGE / SOLDER PAD LAYOUT
BI-COLOR LED

[10,67]

DRN CKD APP

.102 [2,59]

. 177

[4,5]

REV

Α

1501 ROUTE 34 SOUTH FARMINGDALE, NJ 07727

DATE

NOTES:

.095

[2,41]

- I. DIALIGHT PART NUMBER: 515-1001F.
- 2. COMPONENTS DESIGNED TO BE PRESSED INTO PC BOARD.
- 3. MATERIAL TO BE CLEAR, TRANSMISSIVE POLYCARBONATE (UL-94V-0 FLAMMABILITY).

.479 [12,17]

[16,31]

- 4. STORAGE AND OPERATING TEMPERATURE: -30 TO +100°C.
- 5. RECOMMENDED SURFACE MOUNT LEDS DIALIGHT PART NUMBERS: 597-3XXI-2XXF (SINGLE COLOR) 597-77XI-2XXF (BI-COLOR)
- 6. 45° CHAMFER AROUND INSIDE OF PANEL CUT OUT (OPTIONAL).