

Product Specifications



L4P43A-PDMDF-12M-X

LDF4-50A SureFlex™ Jumper with interface types 7-16 DIN Male and 7-16 DIN Female, 12 m



CHARACTERISTICS


General Specifications

Body Style, Connector A	Straight
Body Style, Connector B	Straight
Cable Family	LDF4-50A
Interface, Connector A	7-16 DIN Male
Interface, Connector B	7-16 DIN Female
Length	12.000 m 39.370 ft
Attachment, Connector B	Field attachment

Electrical Specifications

DTF, Connector A	-32.00 dB
------------------	-----------

Jumper Assembly Sample Label

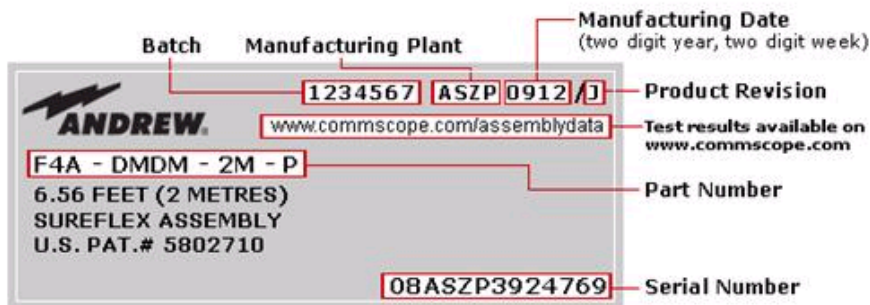

Return Loss/VSWR

Frequency Band	VSWR	Return Loss (dB)
800–970 MHz	1.15	23.13
1420–1530 MHz	1.15	23.13
1700–2180 MHz	1.15	23.13

Regulatory Compliance/Certifications

Agency	Classification
--------	----------------

www.commscope.com/andrew

©2011 CommScope, Inc. All rights reserved.
All trademarks identified by ® or ™ are registered trademarks or trademarks, respectively, of CommScope. All specifications are subject to change.
See www.commscope.com/andrew for the most current information.

Product Specifications



L4P43A-PDMDF-12M-X

RoHS 2002/95/EC
China RoHS SJ/T 11364-2006
ISO 9001:2008

Compliant by Exemption
Above Maximum Concentration Value (MCV)
Designed, manufactured and/or distributed under this quality management system



INCLUDED PRODUCTS



LDF4-50A

LDF4-50A, HELIAX® Low Density Foam Coaxial Cable, corrugated copper, 1/2 in, black PE jacket



L4TDF-PS

7-16 DIN Female Positive Stop™ for 1/2 in LDF4-50A cable



L4TDF-PSA

7-16 DIN Female Positive Stop™ for 1/2 in AL4RPV-50, LDF4-50A cable

www.commscope.com/andrew

©2011 CommScope, Inc. All rights reserved.

All trademarks identified by ® or ™ are registered trademarks or trademarks, respectively, of CommScope. All specifications are subject to change.
See www.commscope.com/andrew for the most current information.

page 2 of 2
6/9/2011