

# Product Specifications

L4P43A-PDMDF-15M-X

LDF4-50A SureFlex™ Jumper with interface types 7-16 DIN Male and 7-16 DIN Female, 15 m



## CHARACTERISTICS


### General Specifications

Body Style, Connector A	Straight
Body Style, Connector B	Straight
Cable Family	LDF4-50A
Interface, Connector A	7-16 DIN Male
Interface, Connector B	7-16 DIN Female
Length	15.000 m   49.213 ft
Attachment, Connector B	Field attachment

### Electrical Specifications

DTF, Connector A	-32.00 dB
------------------	-----------

### Jumper Assembly Sample Label

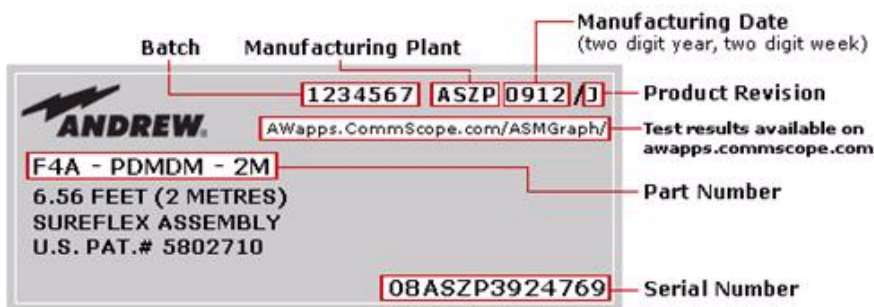

### Return Loss

Frequency Band	VSWR	Return Loss (dB)
800–970 MHz	1.15	23.13
1420–1530 MHz	1.15	23.13
1700–2180 MHz	1.15	23.13

## INCLUDED PRODUCTS

# Product Specifications

L4P43A-PDMDF-1.5M-X



## **LDF4-50A**

LDF4-50A, HELIAX® Low Density Foam Coaxial Cable, corrugated copper, 1/2 in, black PE jacket

---



## **L4TDF-PS**

7-16 DIN Female Positive Stop™ for 1/2 in LDF4-50A cable

---



## **L4TDF-PSA**

7-16 DIN Female Positive Stop™ for 1/2 in AL4RPV-50, LDF4-50A cable

---