
CONTACT PART NUMBER (XXXY)	CLIP/SHELL PLATING	"T" TAIL LENGTH		EXTRACTION FORCE	NO. OF FINGERS	REF. CLIP NO.					
509B	30 u″ GOLD/200 u″ TIN	.125	20 G	11 G	6	6 (43)					
120B	30 u″ GOLD/10 u″ GOLD	.180	20 G	11 G	6	6 (43)					
003A	30 u″ GDLD/200 u″ TIN	.100	20 G	11 G	6	6 (43)					
509A	30 u″ GOLD/10 u″ GOLD	.125	20 G	11 G	6	6 (43)					
009A	30 u″ GOLD/200 u″ TIN	.150	20 G	12 G	3	3 (48)					
011A	10 u" GOLD/200 u" TIN	.125	20 G	11 G	6	6 (43)					

1 | 2

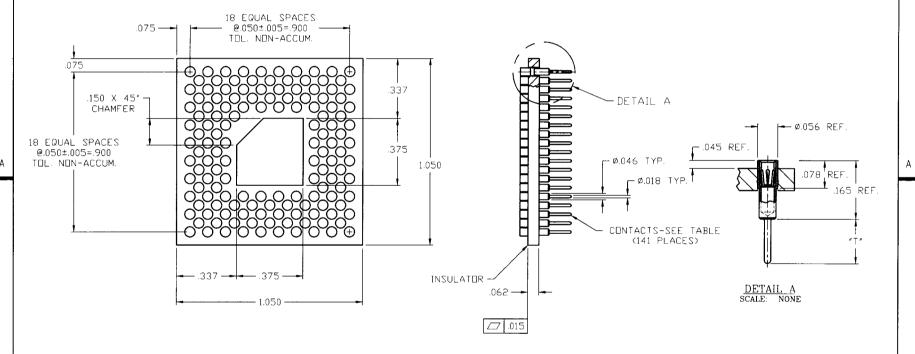

NOTES:

- 1. INSULATOR MATERIAL: GLASS EPOXY, FIRE RESISTANT, FR4; COLOR NATURAL.
- 2. CONTACT MATERIAL:

 DUTER SHELL: BRASS ALLOY 360, 1/2 HARD PER QQ-B-626.

 INNER CONTACT: BERYLLIUM COPPER, ALLOY 172 PER QQ-C-533.

														_ []	ZA1	41H	XXX	r-19	AB-	·F		ı
mat'l. code				tolerances unless otherwise specified					CUSTOMER			Electronics										
ltr	ecn no	dr	date		T		.XX ±.01 COPY				FCI www.fciconn						nect.com					
Α	V0001	7 DLW	2/15/0	linea	r 🗀	.XXX ±.0		.XXX ±.005		projection ti		title									1	
В	V02915	MEM	MEM 12/7/0		.xxxx		XX ±	±.0020		1 6 1			1,4		POSITION:							
				angl	angles 0° ±2°		0' ±2'					(10 X 10) S					OCKET					
				dr	D.	D. WOLFORD		2/1	5/00	INCH		produ	ict fo	mily	iily PZA			cod		e	1	
				engr	ngr A. VASBINDER 2		R 2/15/00					size dwg no							7 -]	
				chr	A.	A. VASBINDER		2/1	/15/00	scale		ا ۸ ا		58510				she		et	Ì	
			appd	d A. VASBINDER			2/15/00		2:1			Α		5051			U		1 of 1		ı	
she	et rev	ision	В] ,
inde	x sh	eet	1																	T] [
	^	ΛD								3					cage	code 22	526	 6			4	•

PDM: Rev:B

3 |

ACAD

STATUS: Released

Printed: Oct 16, 2004

PART NUMBER (SEE TABLE)

1 2