


MARKETING SALES DRAWING

DIMENSIONS IN INCHES - DO NOT SCALE THIS DRAWING

DIMENSIONS IN METRIC - []

This drawing is the property of
Tusonix, Inc., and may not be
used, reproduced, published or
disclosed to others without ex-
pressed authorization by Tusonix Inc.

**Electrical Testing
per Tusonix standard
test plans and Mil-Std-202
Test Methods.**

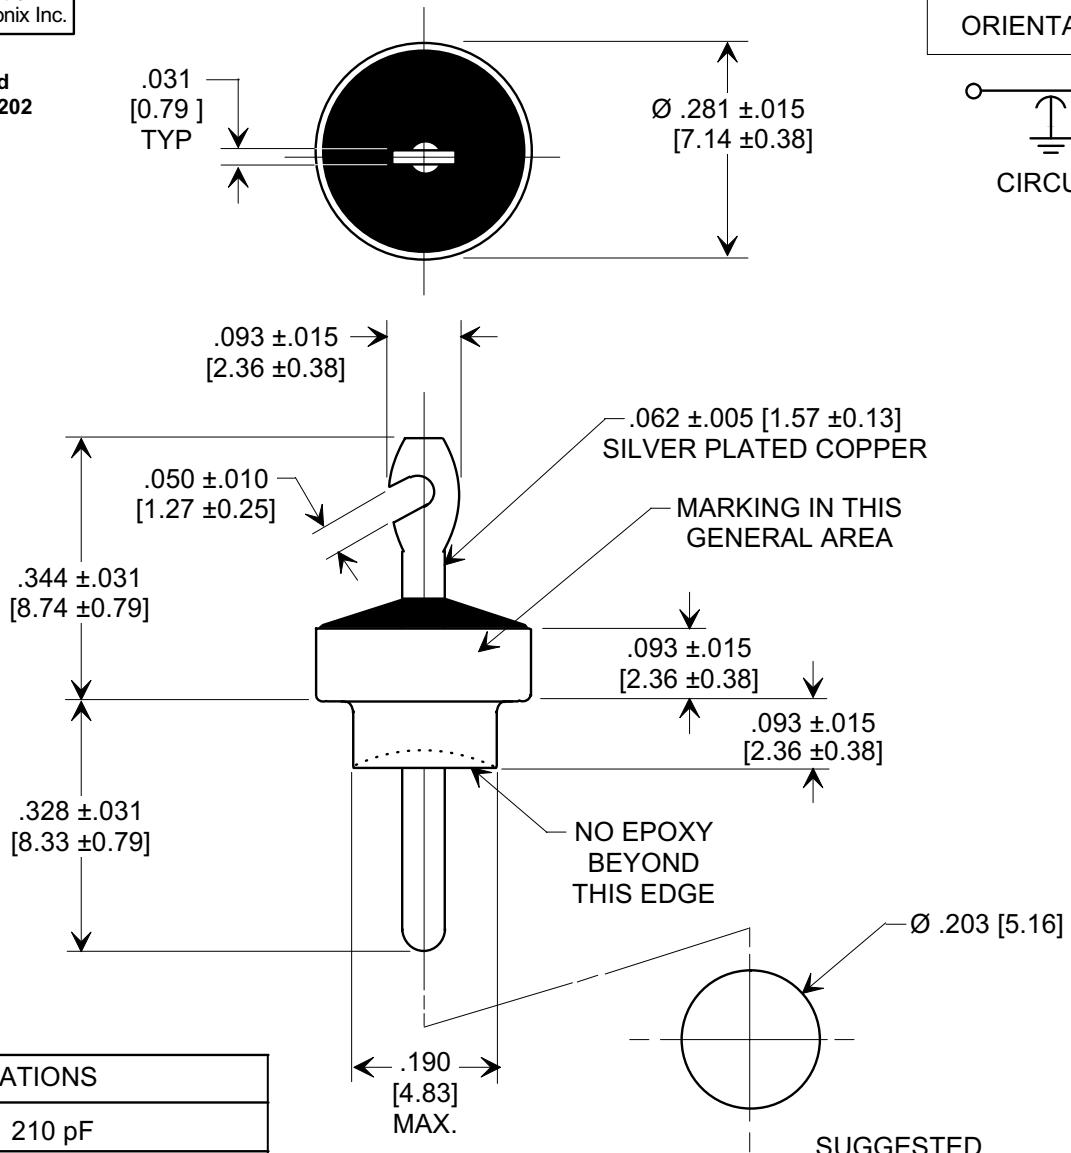

SPECIFICATIONS

CAP. VALUE:	210 pF
CAP. TOL.:	±10%
TEMP. CHAR.:	X5P
RATING:	500 VDC @ +85°C
OPERATING RANGE:	-55°C TO +85°C
CURRENT (A)	20
I.R. MIN.	10 G Ω
D.W.V.	1500 VDC
MARKING: CAP CODE	211

NOTES:

1. TUSONIX STANDARD PART NUMBER: 2450-001-X5P0-211K.
TUSONIX RoHS COMPLIANT PART NUMBER:
2450-001-X5P0-211K LF.
CUSTOMER MUST SPECIFY STANDARD OR RoHS PART NUMBER
WHEN ORDERING.
2. LEAD FINISH: SILVER PLATED.
3. BUSHING FINISH: SILVER PLATED.
4. PART MARKING: 3 DIGIT CAPACITANCE CODE STAMPED ON SIDE
OF SHELL. STANDARD PART: BLACK INK. RoHS PART: GREEN INK.

REVISION RECORD	
C.O. 20050401-1-01	0
TITLE CHANGE 2450-001-X5P0-211K WAS X5R0-211K L.E. 04-07-05	
20050407-4-02	1
ADDED NOTES 1-3. S.M. 02-06-06	
20060110-1-03	2

--TOLERANCES--
Unless Otherwise
Specified

DECIMAL ± NOTED

ANGLES ±

TUSONIX
TUCSON, ARIZONA

Title

**DISCOIDAL
FEED-THRU
CAPACITOR**

Drawn

L.E. 04-01-05

Scale 4 X

Approved

B.Mc. 04-01-05

A

2450-001-X5P0-211K