
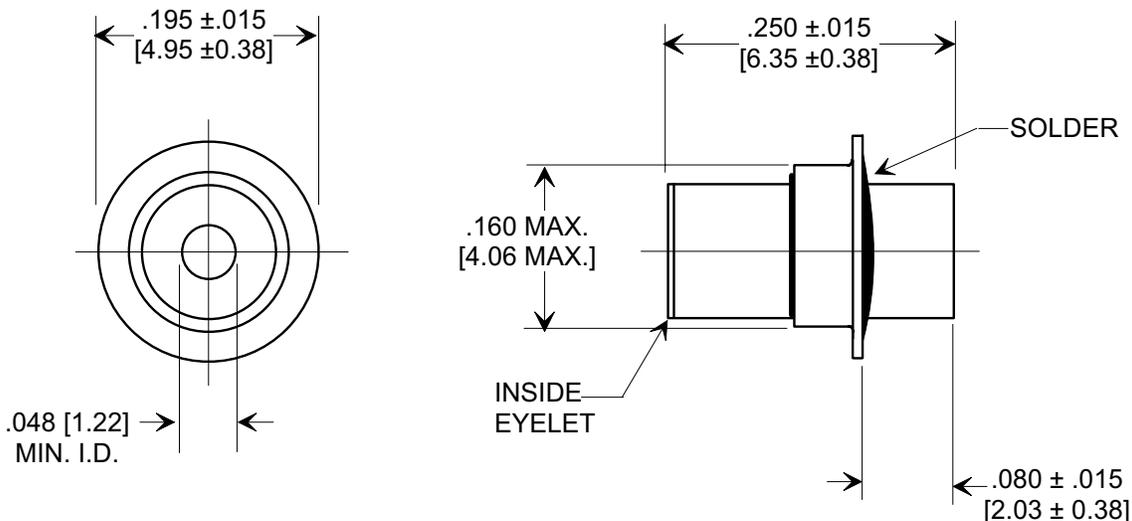



MARKETING SALES DRAWING

DIMENSIONS IN INCHES - DO NOT SCALE THIS DRAWING
DIMENSIONS IN METRIC - []

Electrical Testing
 per Tusonix standard
 test plans and Mil-Std-202
 Test Methods.



SPECIFICATIONS

TUSONIX PART NO.	2482-033-X5PO-501K
Cap. Value:	500 pF
Cap. Tol.:	$\pm 10\%$
Temp. Char.:	X5P
Operating. Temp.:	-55° TO +85°C
Operating. Volt.:	350 WVDC
Dielectric Withstanding Voltage:	613 VDC FOR 2 SECONDS

X-2015 Rev-0 REVISION RECORD Original Release C.O. 20010718-3-01	0	--TOLERANCES-- Unless Otherwise Specified DECIMAL $\pm .015$ [0.38] ANGLES \pm	Title FEED-THRU CAPACITOR		
	TUSONIX TUCSON, ARIZONA		Drawn L.E. 07-20-01	Scale 6 X	
	A		Approved T.C. 07-20-01		
	2482-033-X5PO-501K				