

Coaxial cable connection of Antennas, Sensors, and Communication Trunk Lines


SAE/USCAR-19

Termination of coaxial cables in automotive, medical and instrumentation applications utilizes a single motion to crimp the center conductor, shield and outer insulation.

GT5 Series

— Connectors for coaxial cables —

<Several types and configurations: In-line, board mounted, combinations of coaxial cable with signal/power, Multi-position and color/ keying variations.>

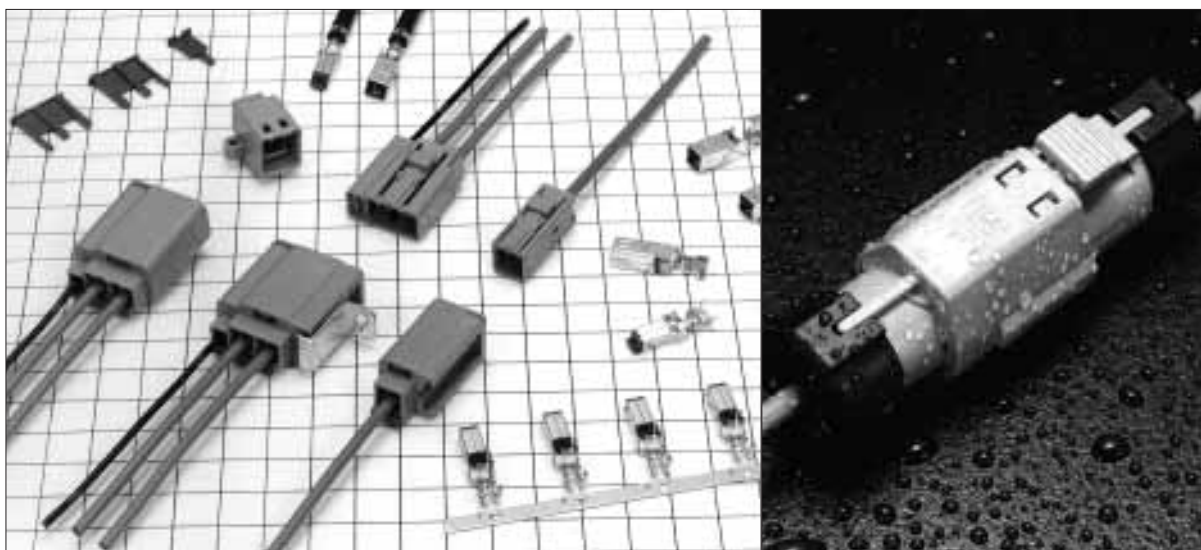

Features


- **USCAR Standard** titled "Square Outer Conductor (SAE/USCAR-19)" excludes Water Proof type (GT5W)
- **Cost efficient termination**
Highly efficient and reliable single motion "Twin CrimpTM" termination allows high volume production with semi-automatic equipment.
- **Space-saving Design**
- **Lock-release latching system**
- **Shock / vibration resistant electrical connections**
- **Verification of the full contact insertion**
- **Color and polarizing variations**
- **Excellent High Frequency Performance**
Refer to V.S.W.R. data on the following pages.

Applications

In-car communication, car sensors (temperature, pressure), automotive audio systems, GPS antenna systems, RACS antenna audio/video antenna systems, CRT displays, medical and measuring instrumentation, variety of communication equipment, office automation equipment, LAN systems.

*"Twin Crimp" is a registered trade mark of Hirose Electric.


◆ Test Data (Using 1.5D-2V Type cable)

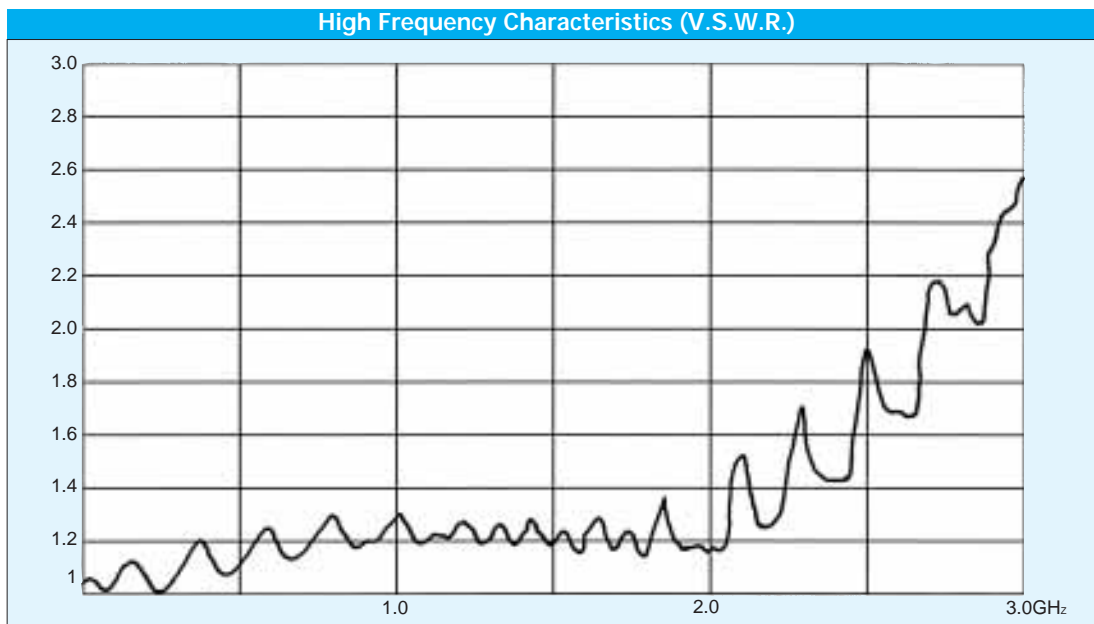


Note: Typical data using fully assembled and connected GT5-1S-HU and the GT5-1PP-HU.

◆ Termination sequence


1. Strip the cable.

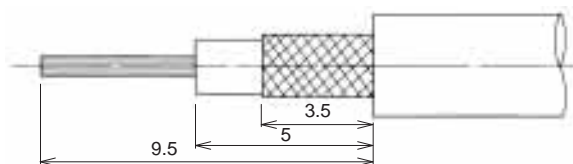


2. Crimp the cable to the terminal.

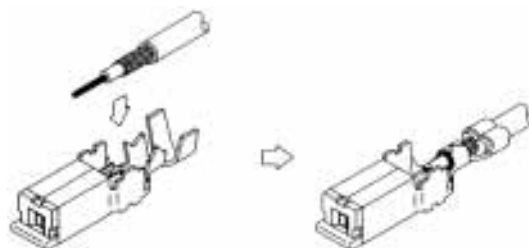

3. Insert the terminal in the housing until is fully locked.

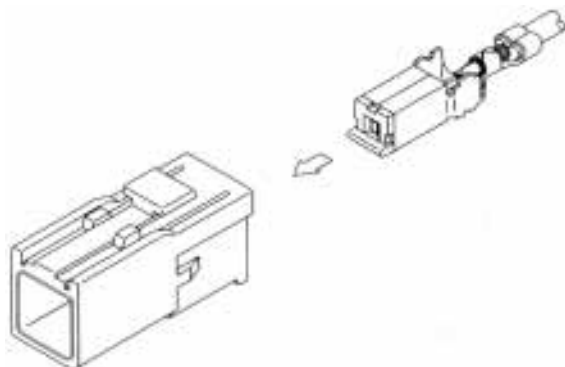


4. Fully insert the retainer.

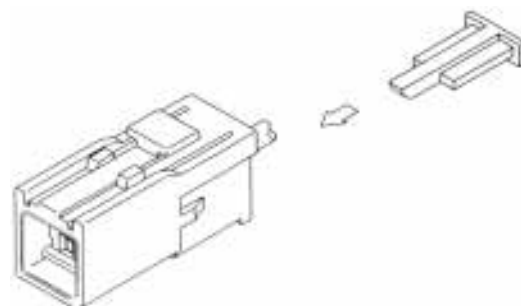

Terminals for coaxial shielded cable

F Connector Terminals

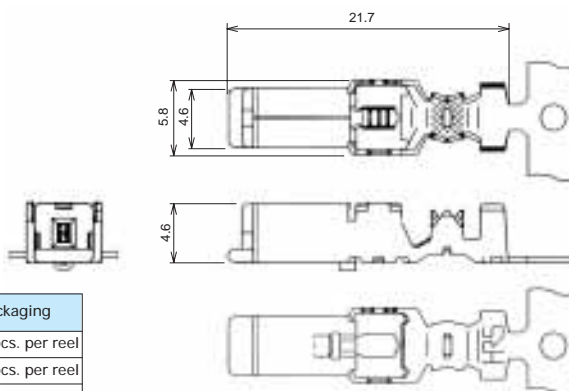


Part Number	CL No.	Conductor Size (AWG)	Inner Insulation Diameter	Outer Diameter	Packaging
GT5-30/0.7-1.5SCF	755-0065-1	#30 or equivalent	0.6 to 0.9mm	1.4 to 1.8mm	1,300 pcs. per reel
GT5-2428/1.6-2.5SCF	755-0078-3	#30 or equivalent	1.5 to 2.0mm	2.3 to 2.7mm	1,300 pcs. per reel
GT5-30/1.6-2.9SCF	755-0022-9	#24 to 28 or equivalent	1.5 to 2.0mm	2.6 to 3.4mm	1,300 pcs. per reel
GT5-2428/1.6-2.9SCF	755-0002-1	#24 to 28 or equivalent			
GT5-2022/1.6-2.9SCF	755-0071-4	#20 to 22 or equivalent	2.4 to 2.9mm	3.3 to 3.7mm	1,100 pcs. per reel
GT5-2022/F2.7-3.5SCF	755-0077-0	#20 to 22 or equivalent			
* GT5-2022/F3.3-3.8SCF	755-0054-5	#20 to 22 or equivalent	2.5 to 2.9mm	3.6 to 4.0mm	1,100 pcs. per reel
* GT5-30/3.3-5SCF	755-0016-6	#30 or equivalent	2.5 to 2.9mm	4.6 to 5.0mm	1,100 pcs. per reel
* GT5-2428/F3.3-5SCF	755-0012-5	#24 to 28 or equivalent			
* GT5-2022/F3.3-5SCF	755-0034-8	#20 to 22 or equivalent	3.0 to 3.6mm	4.6 to 5.0mm	1,100 pcs. per reel
* GT5-30/F4-5SCF	755-0020-3	#30 or equivalent			
* GT5-2428/F4-5SCF	755-0024-4	#24 to 28 or equivalent	3.0 to 3.6mm	4.6 to 5.0mm	1,100 pcs. per reel
* GT5-2022/F4-5SCF	755-0036-3	#20 to 22 or equivalent			

Part	Material	Finish
Insulator	PBT	Color: Dark gray
Crimp terminals	Phosphor bronze	Tin plating
Outer terminals	Brass	Tin plating

Note: Products marked with an asterisk (*) indicate polyethylene foam insulation.

M Connector Terminals

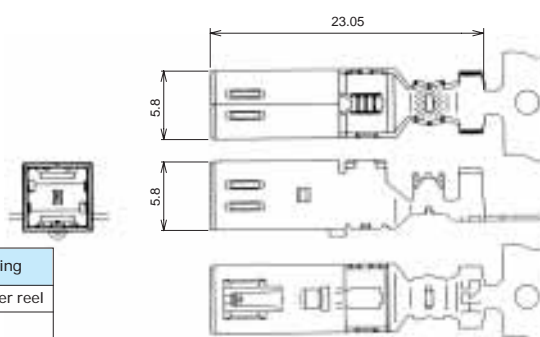


Part Number	CL No.	Conductor Size (AWG)	Inner Insulation Diameter	Outer Diameter	Packaging
GT5-30/0.7-1.5PCF	755-0017-9	#30 or equivalent	0.6 to 0.9mm	1.4 to 1.8mm	900 pcs. per reel
GT5-30/1.6-2.9PCF	755-0021-6	#30 or equivalent	1.5 to 2.0mm	2.6 to 3.4mm	900 pcs. per reel
GT5-2428/1.6-2.9PCF	755-0001-9	#24 to 28 or equivalent			
GT5-2022/1.6-2.9PCF	755-0094-0	#20 to 22 or equivalent	2.4 to 2.9mm	3.3 to 3.7mm	900 pcs. per reel
GT5-2022/F2.7-3.5PCF	755-0076-8	#20 to 22 or equivalent			
* GT5-2022/F3.3-3.8PCF	755-0053-2	#20 to 22 or equivalent	2.5 to 2.9mm	3.6 to 4.0mm	900 pcs. per reel
* GT5-30/F3.3-5PCF	755-0015-3	#30 or equivalent	2.5 to 2.9mm	4.6 to 5.0mm	900 pcs. per reel
* GT5-2428/F3.3-5PCF	755-0011-2	#24 to 28 or equivalent			
* GT5-2022/F3.3-5PCF	755-0033-5	#20 to 22 or equivalent	3.0 to 3.6mm	4.6 to 5.0mm	900 pcs. per reel
* GT5-30/F4-5PCF	755-0019-4	#30 or equivalent			
* GT5-2428/F4-5PCF	755-0023-1	#24 to 28 or equivalent	3.0 to 3.6mm	4.6 to 5.0mm	900 pcs. per reel
* GT5-2022/F4-5PCF	755-0035-0	#20 to 22 or equivalent			

Part	Material	Finish
Insulator	PBT	Color: Dark gray
Crimp terminals	Brass	Tin plating
Outer terminals	Brass	Tin plating

Note: Products marked with an asterisk (*) indicate polyethylene foam insulation.

Low-insertion M Connector Terminals

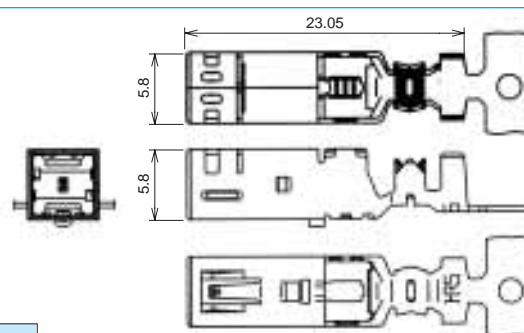

Part Number	HRS No.	Conductor Size (AWG)	Inner Insulation Diameter	Outer Diameter	Packaging
GT5L-30/0.7-1.5PCF	755-0068-0	#30 or equivalent	0.6 to 0.9mm	1.4 to 1.8mm	900 pcs. per reel
GT5L-30/1.6-2.9PCF	755-0067-7	#30 or equivalent	1.5 to 2.0mm	2.6 to 3.4mm	900 pcs. per reel
GT5L-2428/1.6-2.9PCF	755-0066-4	#24 to 28 or equivalent			
GT5L-2428/1.6-2.5PCF	755-0079-6	#24 to 28 or equivalent	1.5 to 2.0mm	2.6 to 3.4mm	900 pcs. per reel

Part	Material	Finish
Insulator	PBT	Color: Dark gray
Crimp terminals	Brass	Tin plating
Outer terminals	Brass	Tin plating

GT5 Series


For Single-Conductor coaxial shielded cable

F Connectors


● Housings



GT5-1S-HU

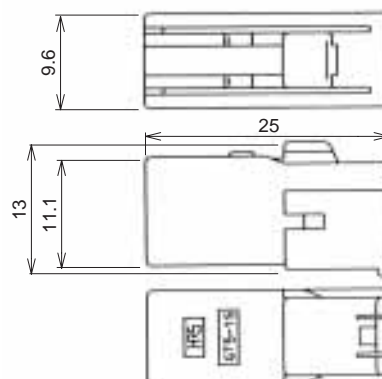


◆ Keying Configurations

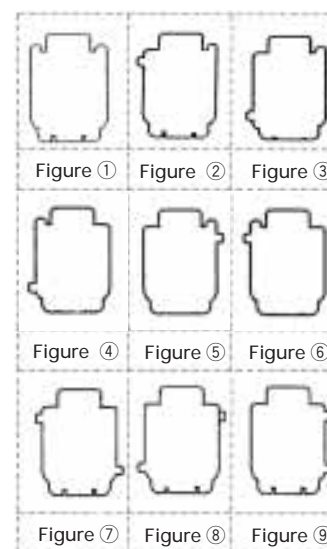

Part Number	CL No.	Material	Color	Key polarizing code	Corresponding M Connector Housing- In-line	Corresponding M Connector Assembly- Board Mounting	USCAR-19 Coding
GT5-1S-HU	755-0004-7	PBT	Light gray	Figure ①	GT5-1PP-HU	GT5-1P-DS	—
GT5-1S-HU(A)	755-0037-6		Brown	Figure ②	GT5-1PP-HU(A)	GT5-1P-DS(A)	A
GT5-1S-HU(B)	755-0038-9		Green	Figure ③	GT5-1PP-HU(B)	GT5-1P-DS(B)	B
GT5-1S-HU(C)	755-0080-5		Blue	Figure ④	GT5-1PP-HU(C)	GT5-1P-DS(C)	C
GT5-1S-HU(D)	755-0081-8		Purple	Figure ⑤	GT5-1PP-HU(D)	GT5-1P-DS(D)	D
GT5-1S-HU(E)	755-0082-0		Pink	Figure ⑥	GT5-1PP-HU(E)	GT5-1P-DS(E)	E
GT5-1S-HU(I)	Note 1		Black	Figure ⑦	GT5-1PP-HU(I)	GT5-1P-DS(I)	I
GT5-1S-HU(J)	Note 1		Cream white	Figure ⑧	GT5-1PP-HU(J)	GT5-1P-DS(J)	J
GT5-1S-HU(K)	Note 1		Pastel orange	Figure ⑨	GT5-1PP-HU(K)	GT5-1P-DS(K)	K

◆ Shown with inserted retainer.




Terminal extraction tool: GT-PO(A), Note 1: concept only

● Retainer (-Optional-Used with the housings: GT5-1S-HU, GT5-1PP-HU, GT5N-1PP-HU, GT5H-1PP-HU)



Part Number	CL No.	Material	Color
GT5-1P/S-R	755-0006-2	PBT	Dark gray

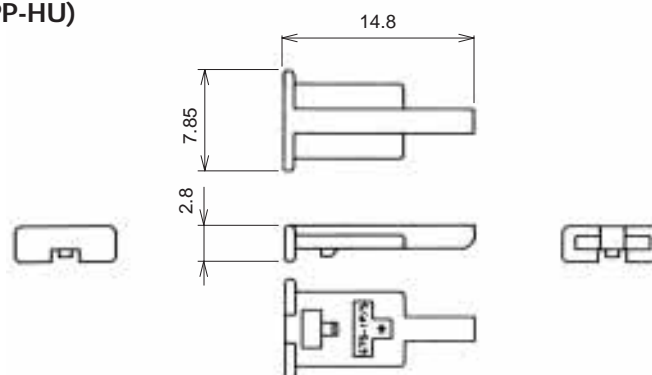


● Housing (Not requiring use of the retainer)



GT5R-1S/HU


Part Number	CL No.	Material	Color
GT5R-1S-HU	755-0047-0	PBT	Light gray

Terminal extraction tool: GT-PO(A)

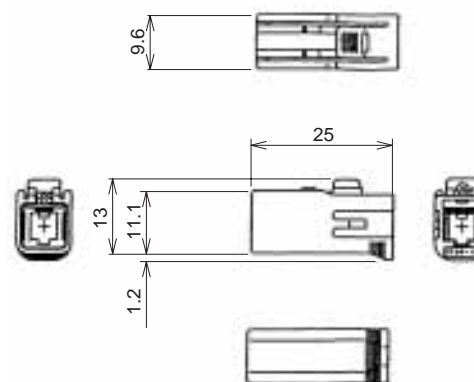

M Connectors

Housings

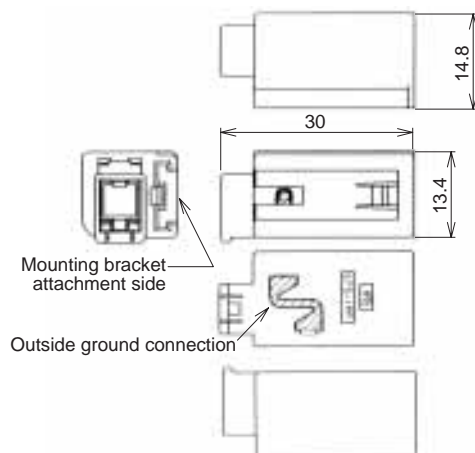


Part Number	CL No.	Corresponding F Connector Housing	Color	Key polarizing code	USCAR-19 Coding
GT5-1PP-HU	755-0005-0	GT5-1S-HU	Light Gray	Figure ①	—
GT5-1PP-HU(A)	755-0039-1	GT5-1S-HU(A)	Brown	Figure ②	A
GT5-1PP-HU(B)	755-0040-0	GT5-1S-HU(B)	Green	Figure ③	B
GT5-1PP-HU(C)	755-0103-9	GT5-1S-HU(C)	Blue	Figure ④	C
GT5-1PP-HU(D)	755-0104-1	GT5-1S-HU(D)	Purple	Figure ⑤	D
GT5-1PP-HU(E)	755-0105-4	GT5-1S-HU(E)	Pink	Figure ⑥	E
GT5-1PP-HU(I)	Note 1	GT5-1S-HU(I)	Black	Figure ⑦	I
GT5-1PP-HU(J)	Note 1	GT5-1S-HU(J)	Cream white	Figure ⑧	J
GT5-1PP-HU(K)	Note 1	GT5-1S-HU(K)	Pastel orange	Figure ⑨	K

* Refer to pages 32 and 34 for panel brackets used with in-line connectors.


* Terminal extraction tool: GT-PO(A)

Note 1: concept only

Keying Configurations

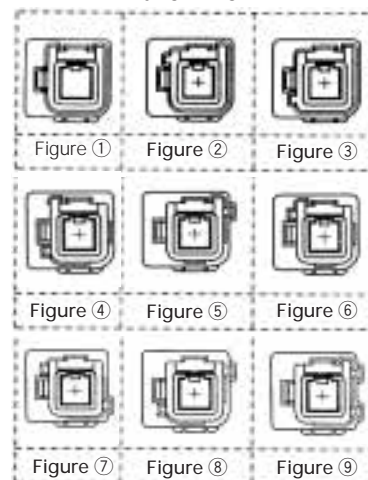


Shown with inserted retainer.




Part	Material	Finish
Housing	PBT	Color: Dark gray
Ground terminal	Phosphor bronze	Tin plating

Housings (For use with H type mounting bracket)

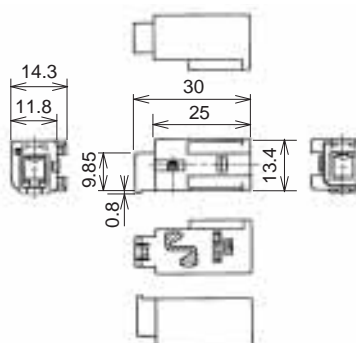


Part Number	CL No.	Color	Corresponding F Connector Housing
GT5H-1PP-HU (10)	755-0093-7 10	Light Gray	GT5-1S-HU
GT5H-1PP-HU (41)	755-0093-7 41	Blue	GT5R-1S-HU


Fully mated connector assemblies.

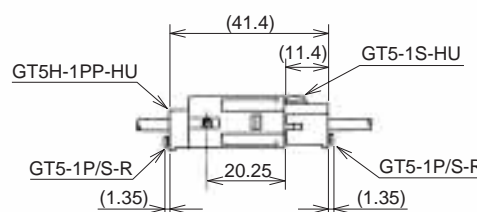

Housing (For use with N type mounting bracket)

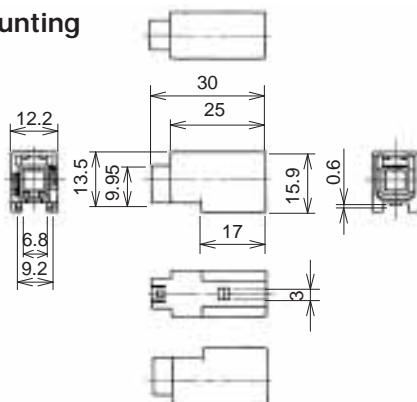

Fully mated connector assemblies.

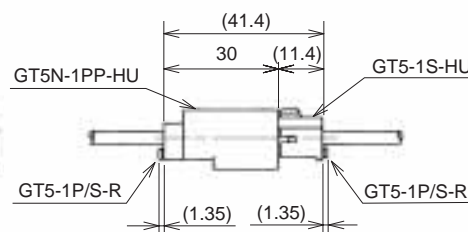


Part Number	CL No.	Color	Corresponding F Connector Housing
GT5N-1PP-HU	755-0090-9	Light Gray	GT5-1S-HU
			GT5R-1S-HU


GT5 Series

● Housings


[Panel mounting, enhanced
shielding configuration]

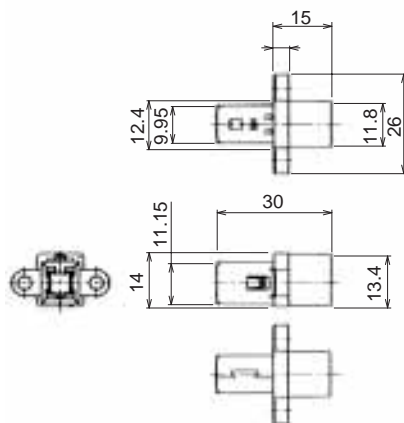

◆ Recommended Panel Cut-out



◆ Mounted and fully mated connector assemblies

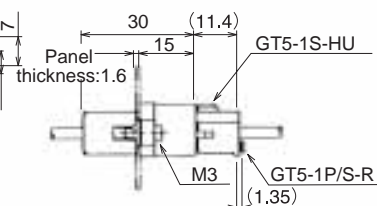


Part Number	CL No.	Part	Material	Finish
GT5A-1PP-HU	755-0025-7	Housing	PBT	Color: Light gray
		Ground terminal	Brass	Tin plating

Note 1: Terminal extraction tool: GT-PO(A)

Note 2: Retainer is optional.

Note 3: Use JIS B 1111 and 1101 M3 screws for the mounting screws.

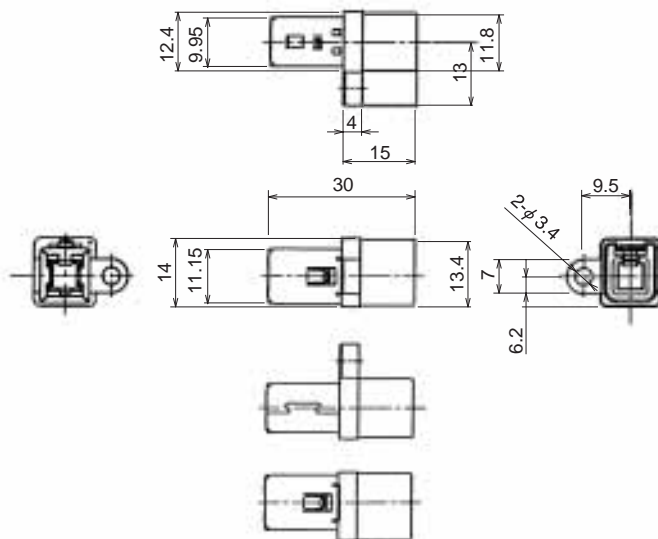


Part Number	CL No.	Part	Material	Finish
GT5P-1PP-HU	755-0030-7	Housing	PBT	Color: Light gray
		Ground terminal	Brass	Tin plating


Note 1: Terminal extraction tool: GT-PO(A)

Note 2: Retainer is optional.


Note 3: Use JIS B 1111 and 1101 M3 screws for the mounting screws.

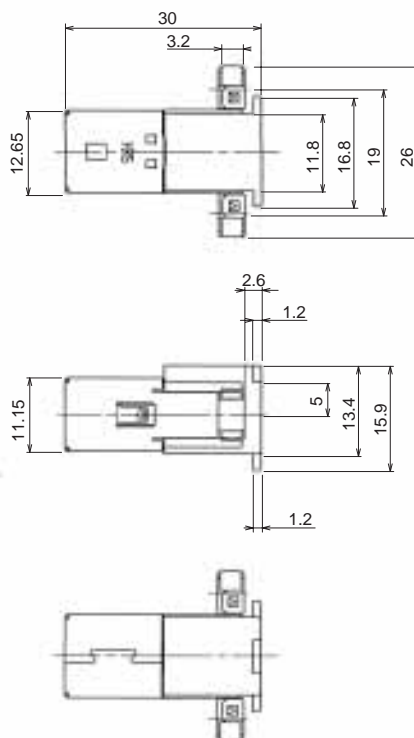

◆ Mounted and fully mated connector assemblies



Assembly Diagram(1:1)




Part Number	CL No.	Part	Material	Finish
GT5B-1PP-HU	755-0051-7	Housing	PBT	Color: Light gray
		Ground terminal	Copper alloy	Tin plating


Note 1: Terminal extraction tool: GT-PO(A) with nominal diameter 3L-6 (for a board thickness of 1.6 mm).

Note 2: Retainer is optional.

Note 3: Use JIS B 1115 and 1122 class 4, nominal diameter 3, length 6 screws for the mounting screws.

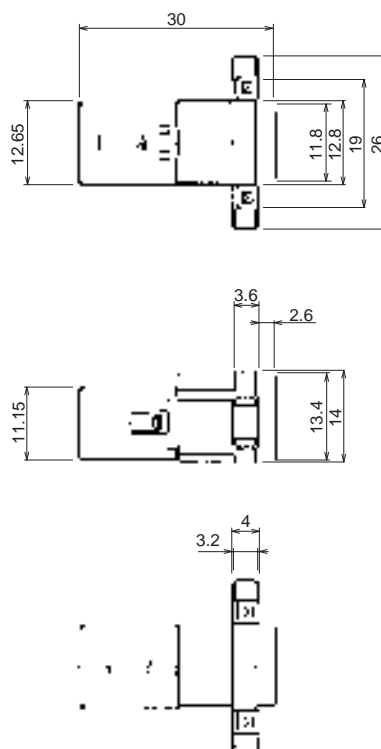

◆ Mounted and fully mated connector assemblies



Assembly Diagram (1:1)



Part Number	CL No.	Part	Material	Finish
GT5S-1PP-HU	755-0050-4	Housing	PBT	Color: Light gray
		Ground terminal	Copper alloy	Tin plating


Note 1: Terminal extraction tool: GT-PO(A) with nominal diameter 3L-6 (for a board thickness of 1.6 mm).

Note 2: Retainer is optional.


Note 3: Use JIS B 1115 and 1122 class 4, nominal diameter 3, length 6 screws for the mounting screws.

GT5 Series

● Connector assembly, Printed Circuit Board Mounting Type




◆ Diagram of Mated Connector in Use

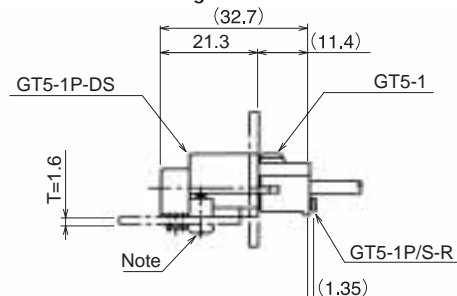


Part Number	CL No.	Color	Key polarizing code	M Connector-Board Type	Corresponding F Connector Housing
GT5-1P-DS	755-0007-5	Light Gray	Figure ①	GT5-1P-DS	GT5-1S-HU
GT5-1P-DS(A)	755-0041-3	Brown	Figure ②	GT5-1P-DS(A)	GT5-1S-HU(A)
GT5-1P-DS(B)	755-0042-6	Green	Figure ③	GT5-1P-DS(B)	GT5-1S-HU(B)
GT5-1P-DS(C)	755-0083-3	Blue	Figure ④	GT5-1P-DS(C)	GT5-1S-HU(C)
GT5-1P-DS(D)	755-0084-6	Purple	Figure ⑤	GT5-1P-DS(D)	GT5-1S-HU(D)
GT5-1P-DS(E)	755-0085-9	Pink	Figure ⑥	GT5-1P-DS(E)	GT5-1S-HU(E)
GT5-1P-DS(I)	Note 2	Black	Figure ⑦	GT5-1P-DS(I)	GT5-1S-HU(I)
GT5-1P-DS(J)	Note 2	Cream white	Figure ⑧	GT5-1P-DS(J)	GT5-1S-HU(J)
GT5-1P-DS(K)	Note 2	Pastel orange	Figure ⑨	GT5-1P-DS(K)	GT5-1S-HU(K)

Note: Use JIS B 1115 and 1122 class 4, nominal diameter 3, length 6 screws (for a board thickness of 1.6 mm) for the mounting screws.

* Eight types of keys are available.
Please use a mating F connector housing of a matching key type.

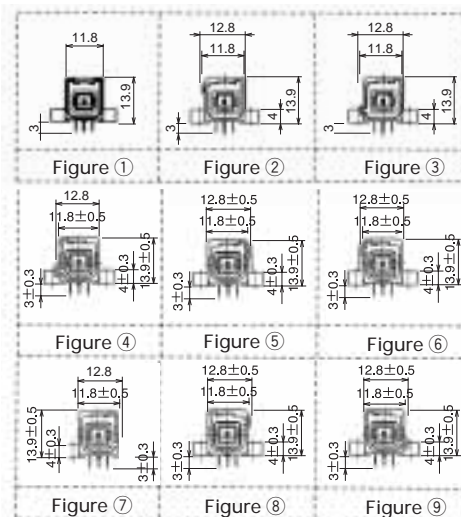

◆ Recommended PCB Mounting Pattern




Part	Material	Finish
Housing	PBT	-
0.65 x 1.1 Terminals	Brass	Tin plating
Insulator	PBT	Dark gray
Outer terminals	Phosphor bronze	Tin plating


Two-position type-Each Single-Conductor coaxial cable

F Connectors

● Housings

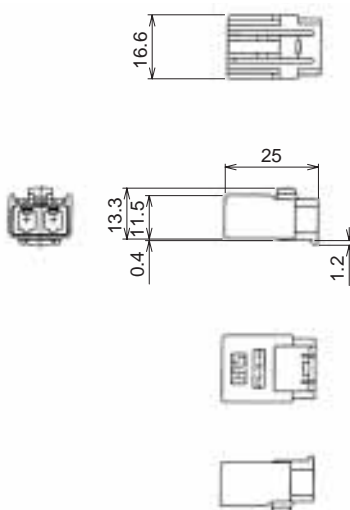

◆Keying Configurations

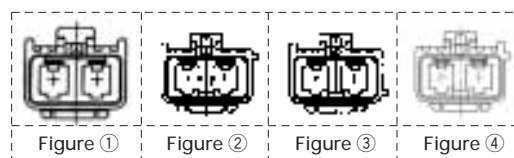


Part Number	CL No.	Material	Color	Key polarizing code	USCAR-19 Coding
GT5-2S-HU	755-0044-1	PBT	Light Gray	Figure ①	D2
GT5-2S-HU(A)	755-0059-9		Brown	Figure ②	A2
GT5-2S-HU(B)	755-0060-8		Green	Figure ③	B2
GT5-2S-HU(C)	755-0097-8		Blue	Figure ④	C2

Note 1: Used with separate retainer (GT5-2P/S-R).

Note 2: Please use a mating F connector of a matching key type.


Note 3: Terminal extraction tool: GT-PO(A)




Shown with inserted retainer.

M Connectors


● Housings[Panel Mounted Housing]

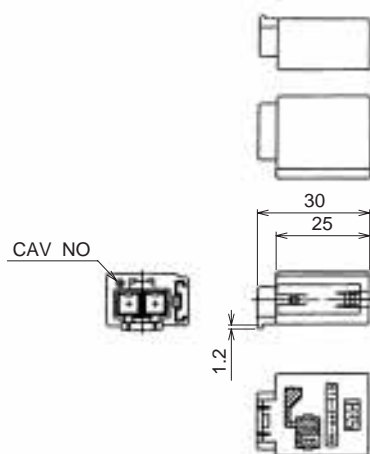


◆Recommended Mounting Bracket dimensions.

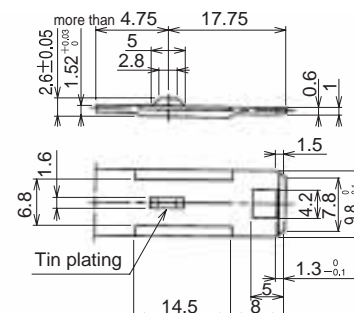

◆Fully mated connector assemblies

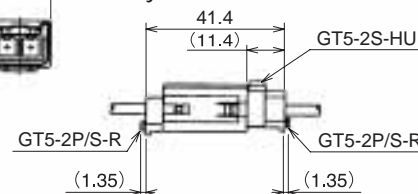

◆Keying Configurations

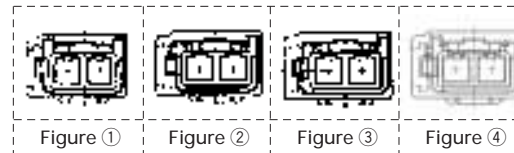

Part Number	CL No.	Color	Key polarizing code
GT5-2PP-HU	755-0045-4	Light Gray	Figure ①
GT5-2PP-HU(A)	755-0063-6	Brown	Figure ②
GT5-2PP-HU(B)	755-0064-9	Green	Figure ③
GT5-2PP-HU(C)	755-0099-3	Blue	Figure ④


Part	Material	Finish
Housing	PBT	-
Ground terminal	Phosphor bronze	Tin plating

Note: Used with separate retainer (GT5-2P/S-R).


Coding D2 at USCAR-19 is GT5-2PP-HU.

GT5 Series

● Housing

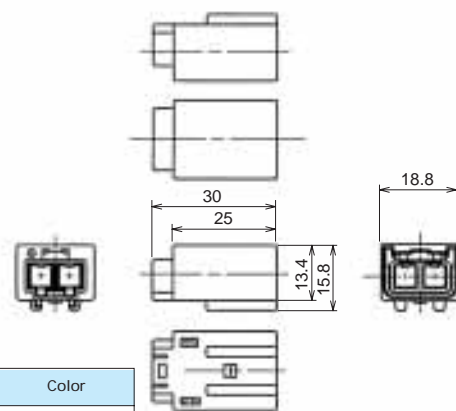

◆ Diagram of Mated Connector in Use


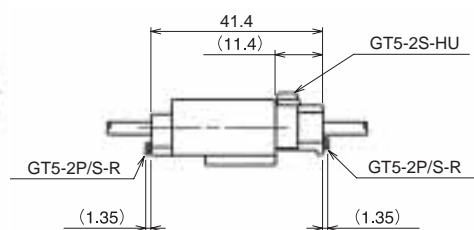


Part Number	CL No.	Material	Color
GT5N-2PP-HU	755-0055-8	PBT	Light gray

Note 1: Terminal extraction tool: GT-PO(A)


Note 2: Used with separate retainer (GT5-2P/S-R).

● Retainer – 2 position (Used with GT5-2S-HU, GT5-2PP-HU, and GT5N-2PP-HU)

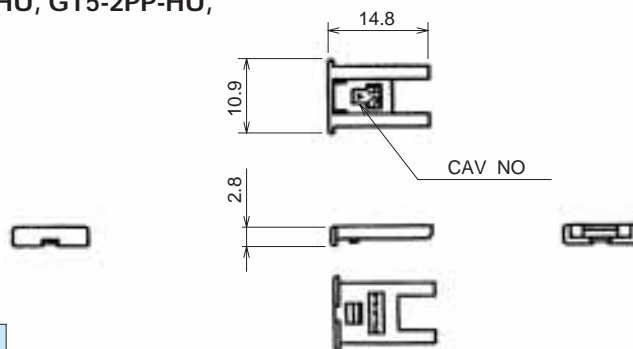


Part Number	CL No.	Material	Color
GT5-2P/S-R	755-0046-7	PBT	Dark gray


● Housings

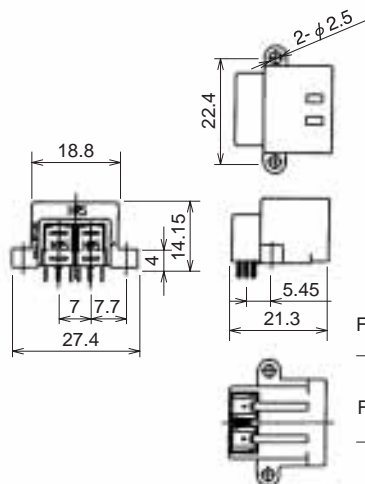


◆ Keying Configurations

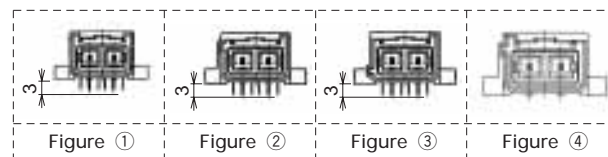

◆ Recommended Board Mounting Pattern

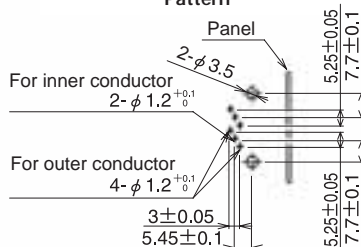


◆ Mounted and fully mated connector assemblies



Part Number	CL No.	Material	Color	Key polarizing code	USCAR-19 Coding
GT5-2P-DS	755-0043-9	PBT	Light Gray	Figure ①	D2
GT5-2P-DS(A)	755-0061-0		Brown	Figure ②	A2
GT5-2P-DS(B)	755-0062-3		Green	Figure ③	B2
GT5-2P-DS(C)	755-0101-3		Blue	Figure ④	C2

Note: Use JIS B 1115 and 1122 class 4, nominal diameter 3, length 6 screws (for a board thickness of 1.6 mm) for the mounting screws.
Coding D2 at USCAR-19 is GT5-2P-DS.

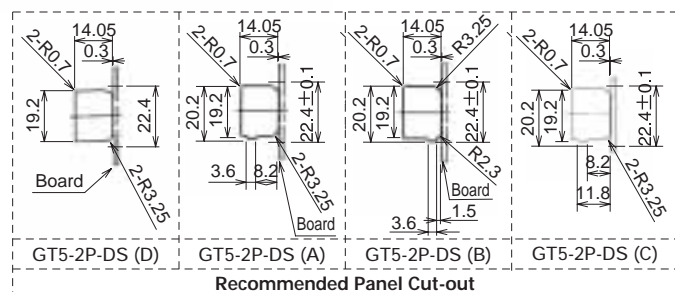


Recommended Panel Cut-out

Power Supply Terminals

(For use with combination type assemblies:

GT5-2/1S-HU, GT5-2/1P-DS, GT5-2/1PP-HU, GT5N-2/1PP-HU)

F Connector Terminals

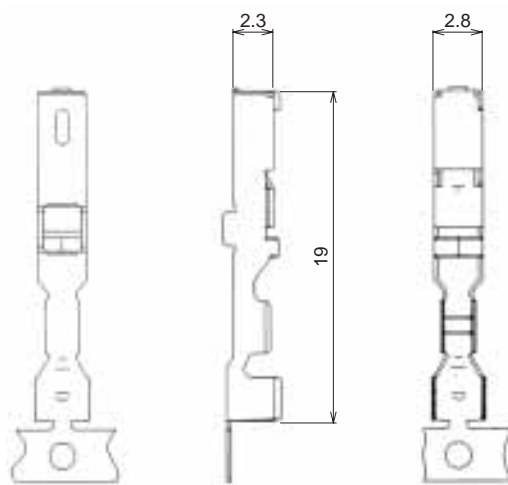


Part Number	CL No.	Material	Finish	Conductor Size (AWG)	Outer Diameter	Packaging
GT7-2022SCF	757-0001-1	Copper alloy	Tin plating	#20 to 22	1.4 to 2.4mm	5,000
GT7A-2022SCF	757-0003-7			#20 to 22	2.6 to 3.1mm	3,000

Note 1: Sold by the reel. (See above table for number of Packaging.)

Note 2: This component is used only with applicable HRS housings.

M Connector Terminals

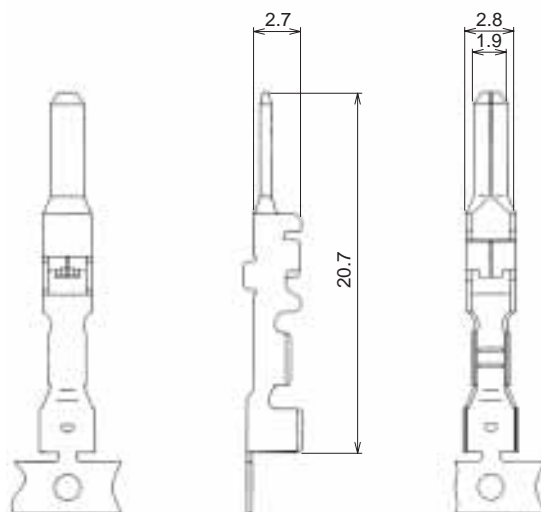

Part Number	CL No.	Material	Finish	Outer Diameter	Packaging
GT7-2022PCF	757-0002-4	Brass	Tin plating	1.4 to 2.4mm	5,000
GT7A-2022PCF	757-0004-0			2.6 to 3.1mm	3,000

Note 1: Sold by the reel. (See above table for number of Packaging.)

Note 2: This component is used only with applicable HRS housings.

GT5 Series

Combinaton Type (Two Single-Conductor Coaxial Cables + One Power contact)

F Connectors


Housing




Part Number	CL No.	Material	Color
GT5-2/1S-HU	755-0009-0	PBT	Light gray

Note 1: Terminal extraction tool: GT-PO(A)

Note 2: Used with separate retainer (GT5-2/1S-R).

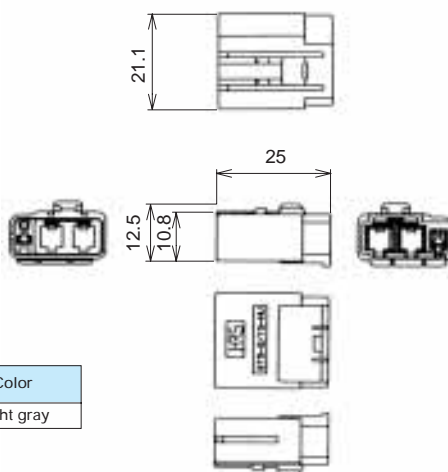


◆ Shown with inserted retainer.



Retainer (exclusively for GT5-2/1S-HU)




Part Number	CL No.	Material	Color
GT5-2/1S-R	755-0003-4	PBT	Dark gray

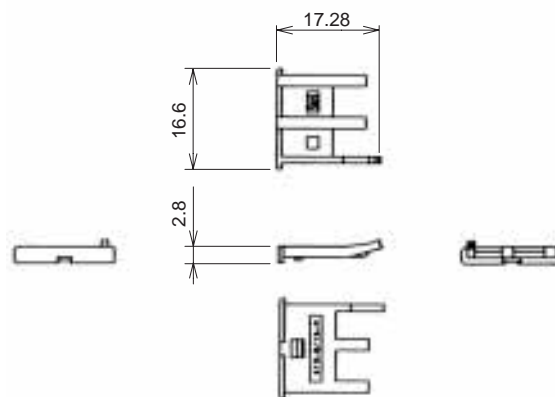


M Connectors


Connector assembly, Printed Circuit Board mounting

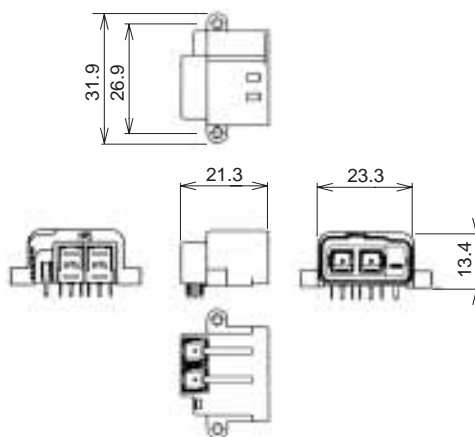

◆ Recommended Board Mounting Pattern

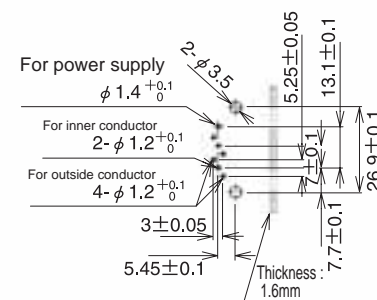

◆ Recommended Panel Cut-out




Part	Material	Finish
Housing	PBT	Color: Light gray
0.64x1.1 Terminal	Brass	Tin plating
Insulator	PBT	Dark gray
Outer terminal	Phosphor bronze	Tin plating
Tub terminal for DS 070	Brass	Tin plating

Part Number	CL No.
GT5-2/1P-DS	755-0014-0

Note: Use JIS B 1115 and 1122 class 4, nominal diameter 3, length 6 screws (for a board thickness of 1.6 mm) for the mounting screws.

M Connectors

● Housing - with External Ground

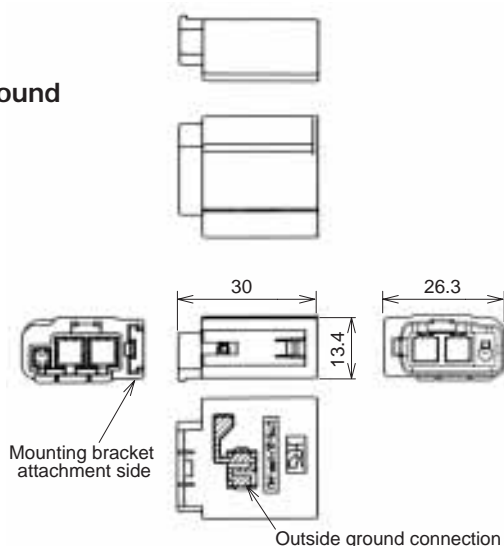


Part Number	CL No.	Part	Material	Finish
GT5-2/1PP-HU	755-0008-8	Housing	PBT	Color: Light gray
		Ground terminal	Phosphor bronze	Tin plating


Note 1: Terminal extraction tool: GT-PO(A)

Note 2: Used with separate retainer (GT5-2/1PP-R).


◆ Shown with inserted retainer.



◆ Recommended Mounting Bracket Dimensions

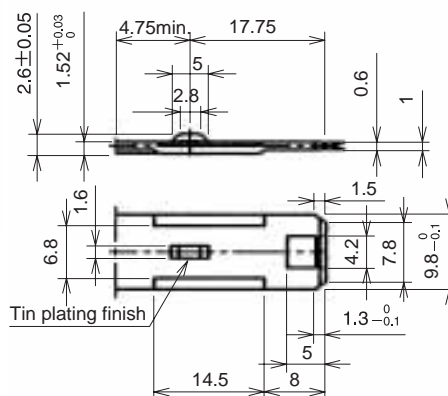

● Housing - without External Ground

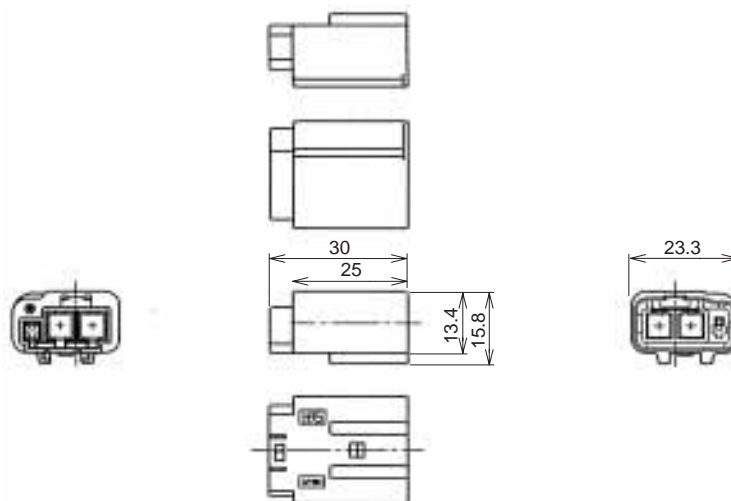

Part Number	CL No.	Material	Color
GT5N-2/1PP-HU	755-0013-8	PBT	Light gray


Note 1: Terminal extraction tool: GT-PO(A)

Note 2: Used with separate retainer GT5-2/1PP-R.

● Retainer (Used with GT5N-2/1PP-HU and GT5-2/1PP-HU)



GT5-2/1PP-R

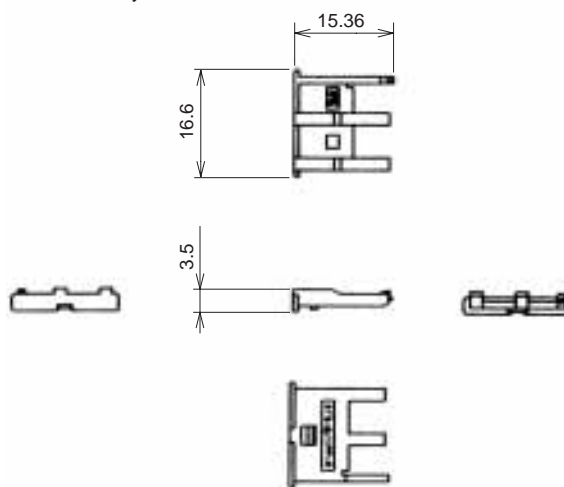


Part Number	CL No.	Material	Color
GT5-2/1PP-R	755-0010-0	PBT	Dark gray

GT5 Series

4-Position – Single conductor Coaxial cable


F Connector

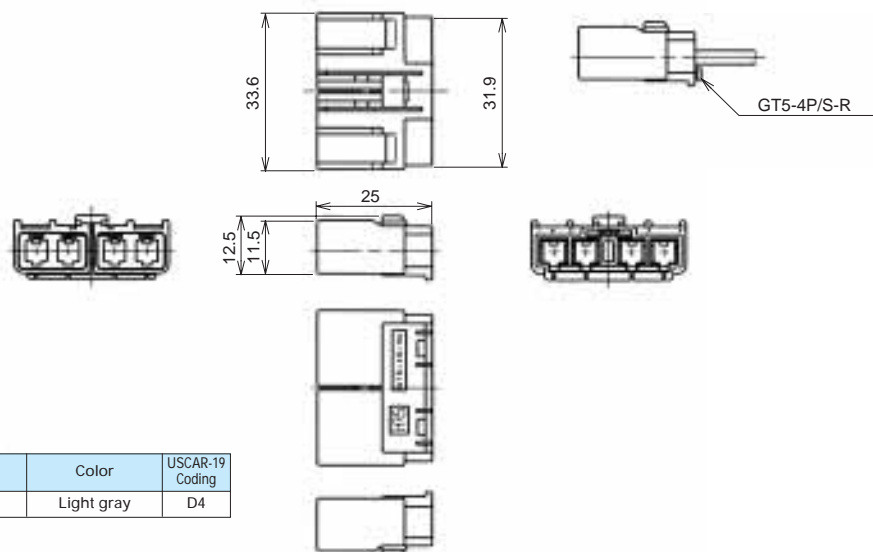

Part Number	CL No.	Material	Color	USCAR-19 Coding
GT5-4S-HU	755-0056-0	PBT	Light gray	D4

Note: Used with separate retainer (GT5-4P/S-R).

M Connector

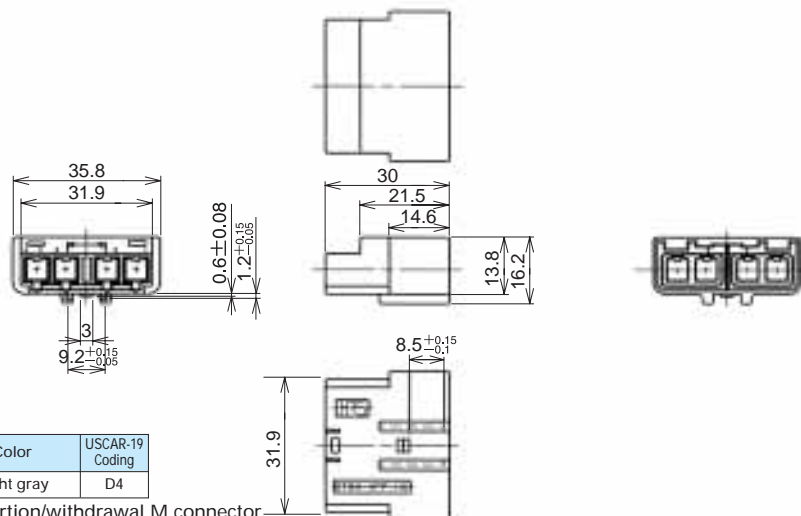


Part Number	CL No.	Material	Color	USCAR-19 Coding
GT5N-4PP-HU	755-0057-3	PBT	Light gray	D4

Note 1: The product should be used with a low-force insertion/withdrawal M connector terminal.

Note 2: Used with separate retainer GT5-4P/S-R.



Retainer (Used with GT5-4S-HU and GT5N-4PP-HU)

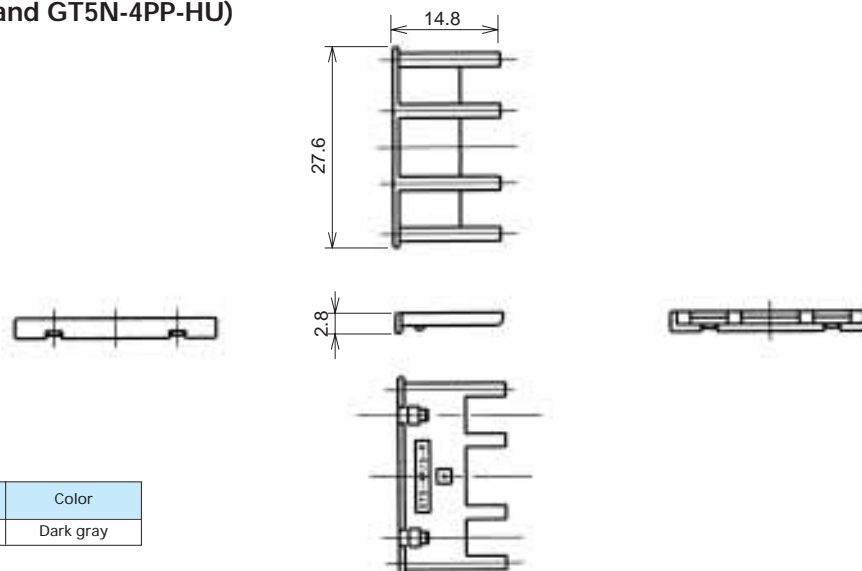

Part Number	CL No.	Material	Color
GT5-4P/S-R	755-0058-6	PBT	Dark gray

M Connector


● Connector assembly, Printed Circuit Board Mounting

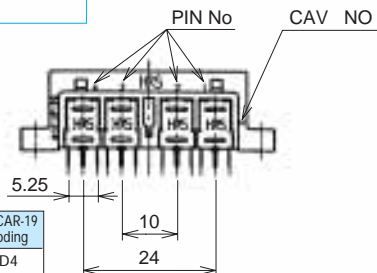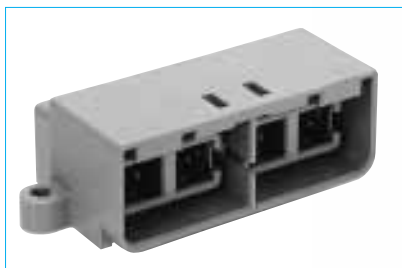






Part Number	CL No.	USCAR-19 Coding
GT5-4P-DS	755-0087-4	D4

Item	Material	Color / Finish
Housing	PBT	Light gray
0.64X1.1Terminal	Brass	Tin plating
Insulator	PBT	Dark gray
Outside tube terminal	Phosphor bronze	Tin plating


◆ Recommended Board Mounting Pattern

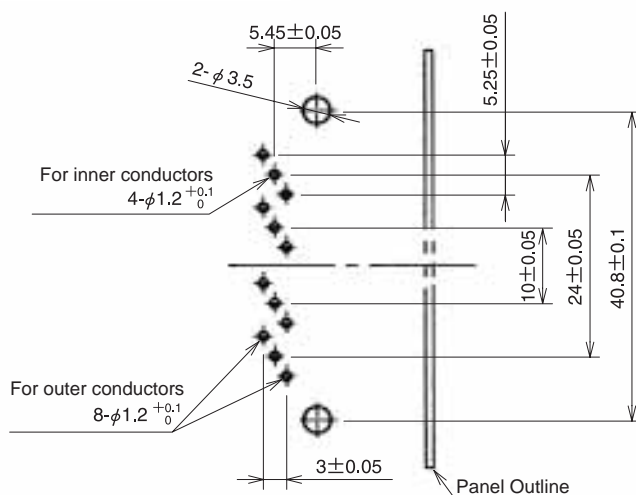

◆ Mounted and fully mated connector assemblies

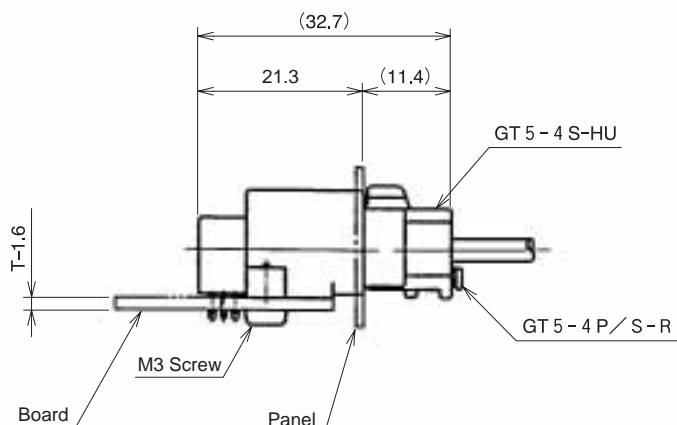

◆ Recommended Panel Cut-out

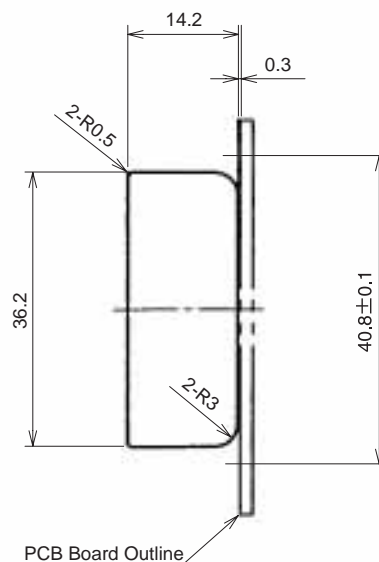


GT5 Series

Single Conductor Coaxial Cable - Waterproof Type

F Connector


● Housing

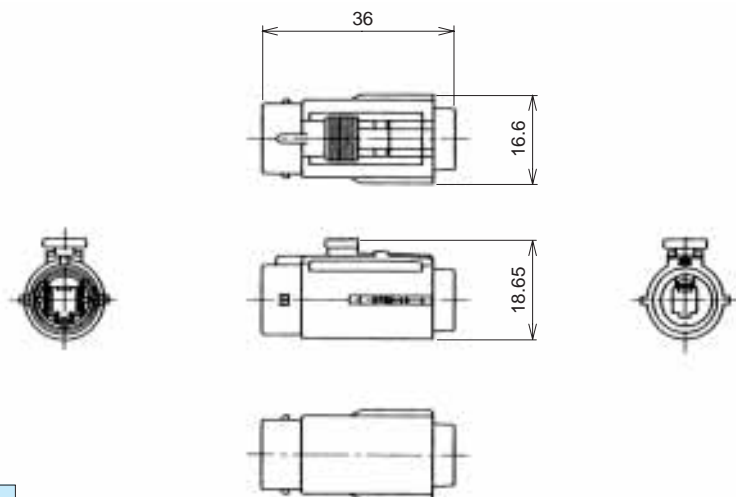

Part Number	CL No.	Material	Color
GT5W-1S-HU	755-0027-2	PBT	Light gray

Note: Specific retainer is determined by the type of the cable used.

● Retainer (Used with GT5W-1P-HU, GT5JW-1PP-HU, GT5W-1S-HU and GT5W-1P-HU)

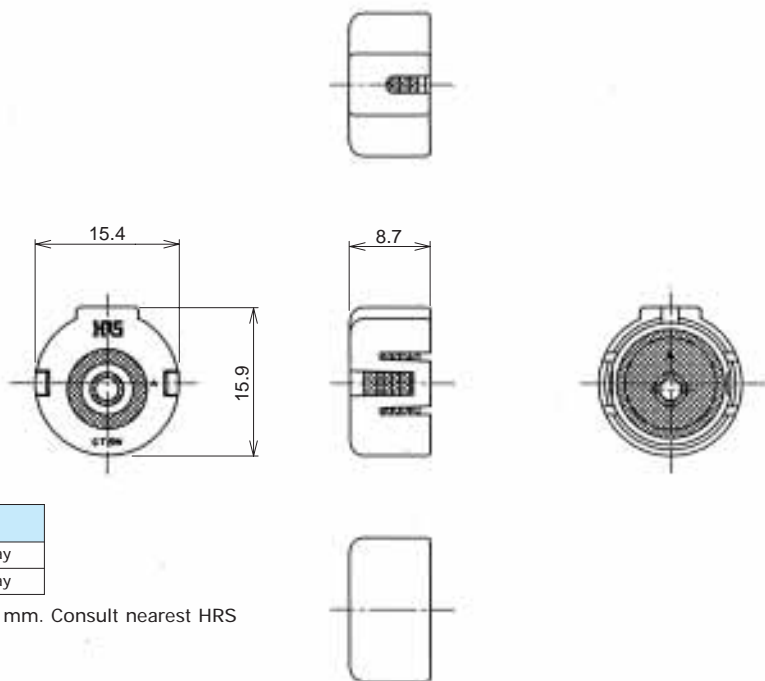


Part Number	CL No.	Material	Color
GT5W-1P/S-R	755-0028-5	PBT	Dark gray
		Silicon rubber Compound	Dark gray

Note: Outer diameter of the cable must be within 2.9 to 3.4 mm. Consult nearest HRS representative for other diameters.

M Connectors


Housing

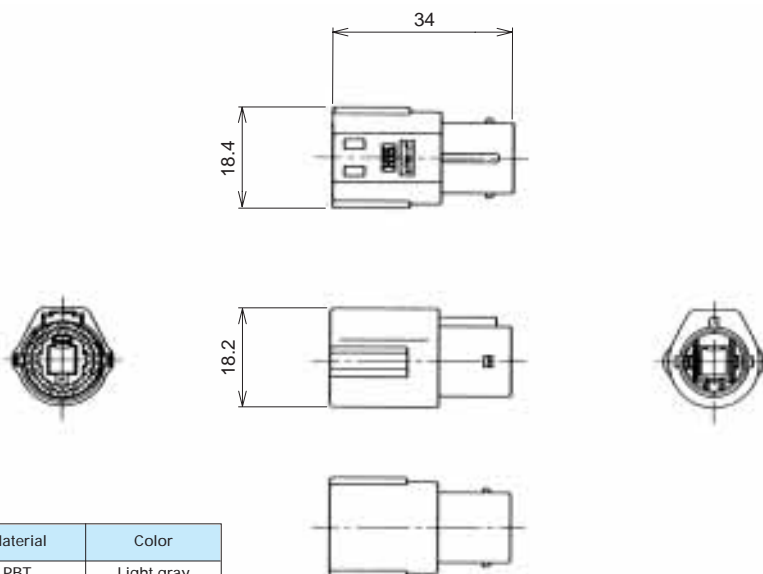


Part Number	CL No.	Part	Material	Color
GT5W-1P-HU	755-0026-0	Housing	PBT	Light gray
		Connector seal	Silicon rubber	White

Note: Use correct retainer.


Housings - Bracket Mounting

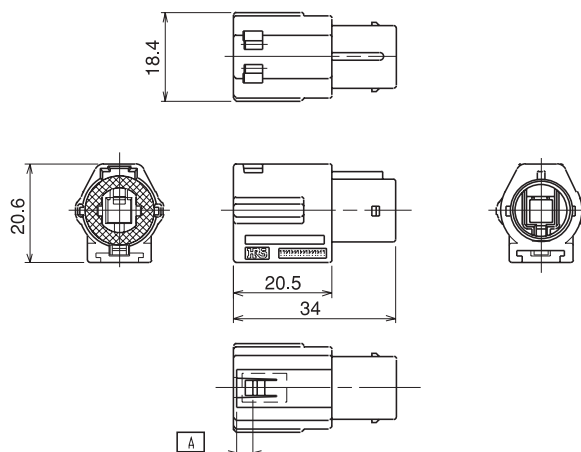

Recommended Bracket Dimensions

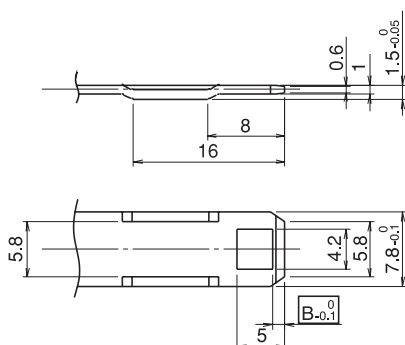

Mounted and fully mated connector assemblies

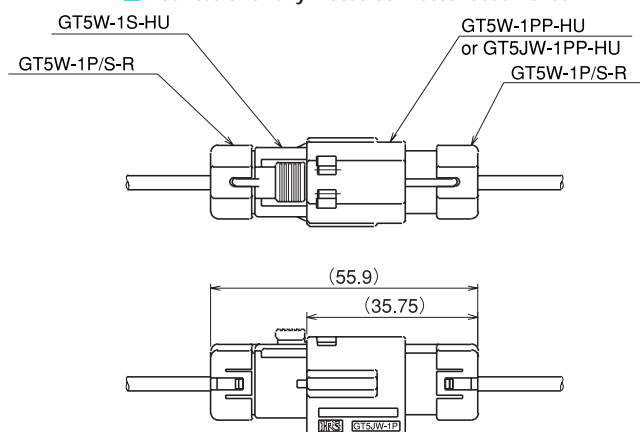


Part Number	CL No.	A	B
GT5W-1PP-HU	755-0070-1	1.5	1.3
GT5JW-1PP-HU	755-0069-2	3.2	3.0

Part	Material	Color
Housing	PBT	Light gray
Connector seal	Silicon rubber Compound	White


GT5 Series

G Terminals


For Direct Coaxial Cable Termination

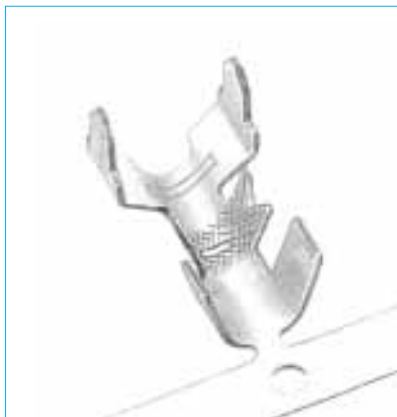



Board Termination Pattern



Part Number	CL No.	Material	Finish	Packaging
GTA-1.6CF	755-0032-2	Brass	Tin plating	1,500 pcs. Per reel

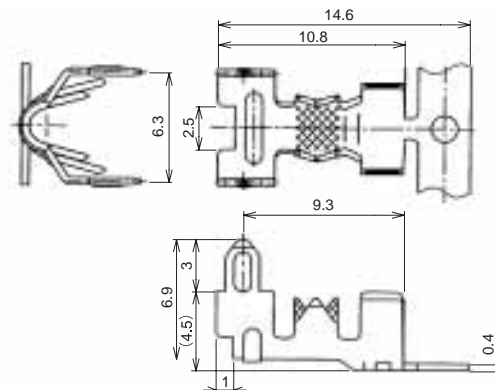


Completed Termination cross section

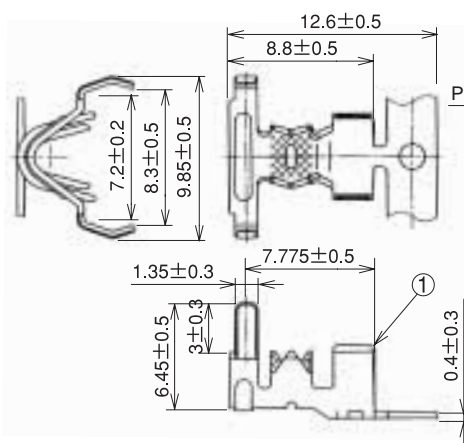
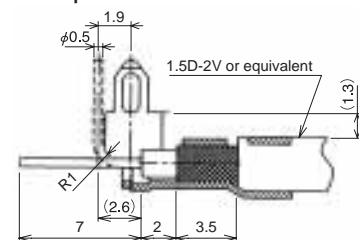


Part Number	CL No.	Material	Finish	Packaging
GTB-1.6CF	755-0049-5	Brass	Tin plating	1,500 pcs. Per reel

Completed Termination cross section

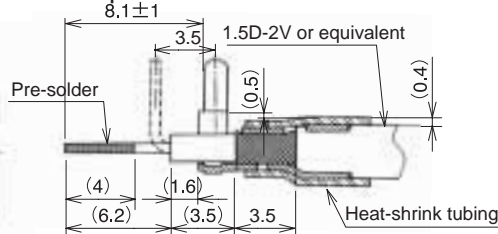


Board Termination Pattern

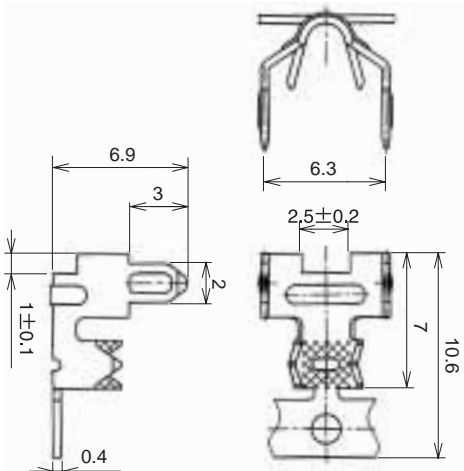


Part Number	CL No.	Material	Finish	Packaging
G-1.6PCF	755-0029-8	Brass	Tin plating	1,500 pcs. Per reel


Completed Termination cross section

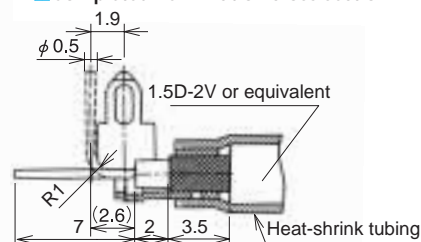



Board Termination Pattern




For Direct Coaxial Cable Termination

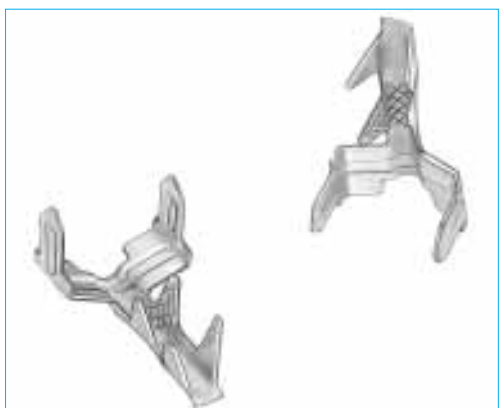


Part Number	CL No.	Material	Finish	Packaging
GTA-0.7CF	755-0074-2	Brass	Tin plating	1,500 pcs. Per reel

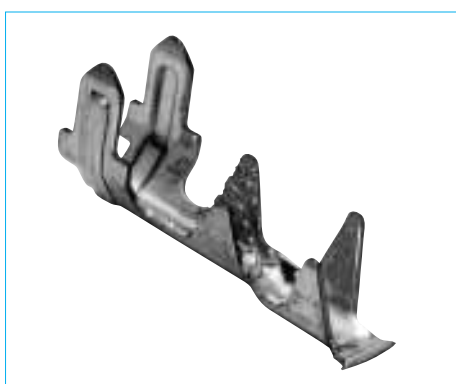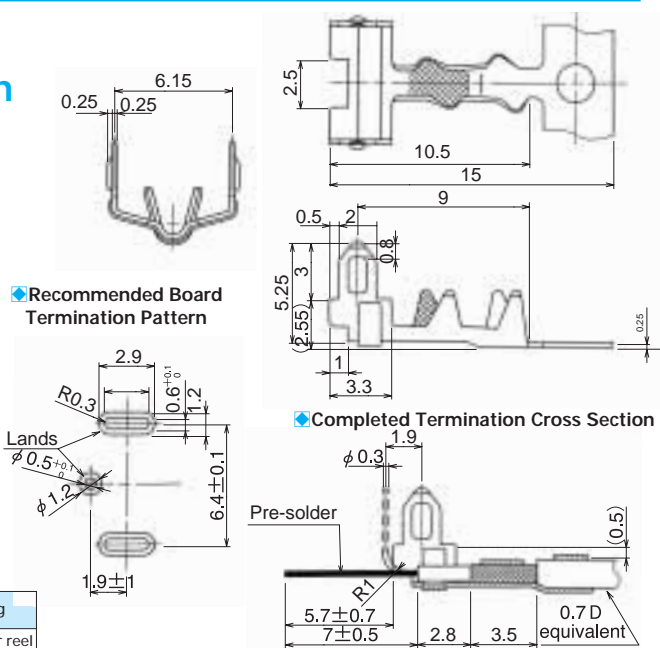


Part Number	CL No.	Material	Finish	Packaging
GTB-0.7CF	755-0075-5	Brass	Tin plating	1,500 pcs. Per reel

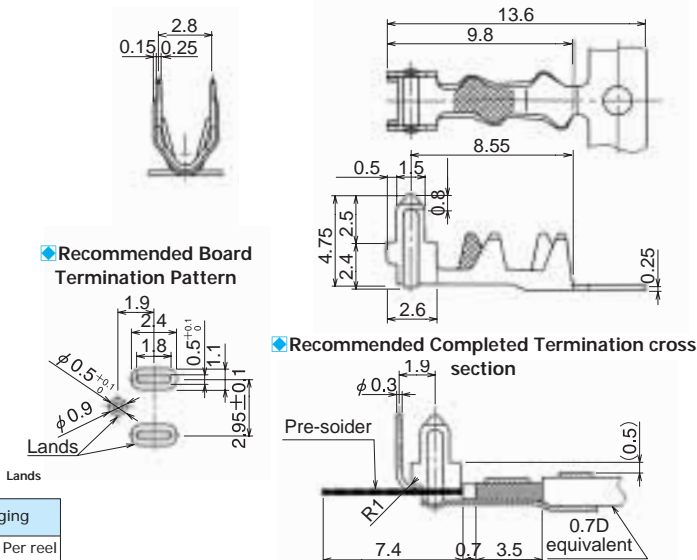

For Mid-Cable Termination

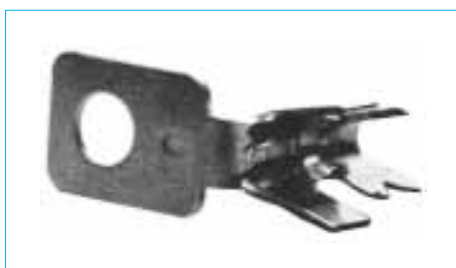


Part Number	CL No.	Material	Finish	Packaging
GT-1.6PG-C	755-0031-0	Brass	Tin plating	1

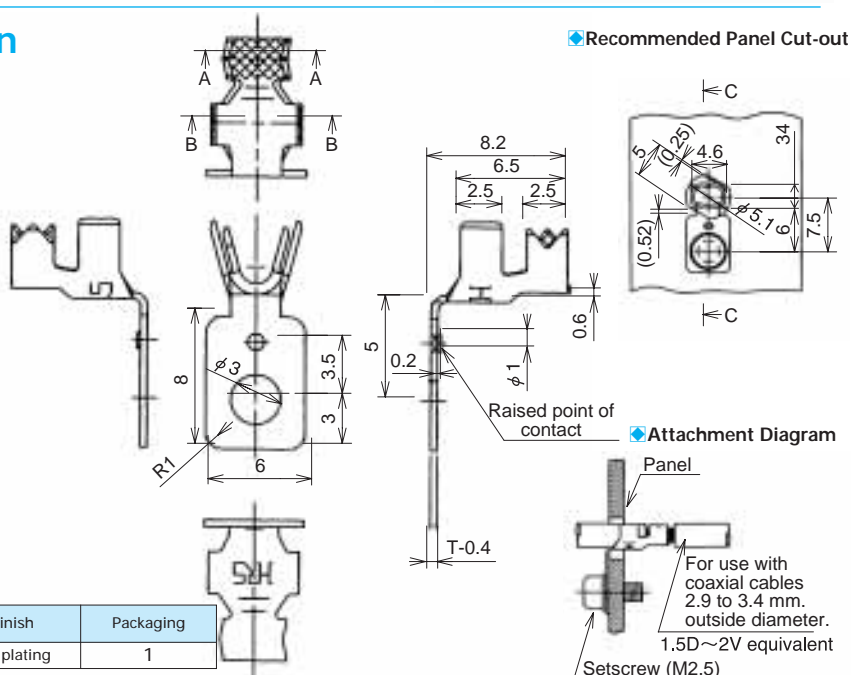


GT5 Series

Bottom Shield cover

● For Improved Electronic Noise Compatibility





Mounted Condition Installed


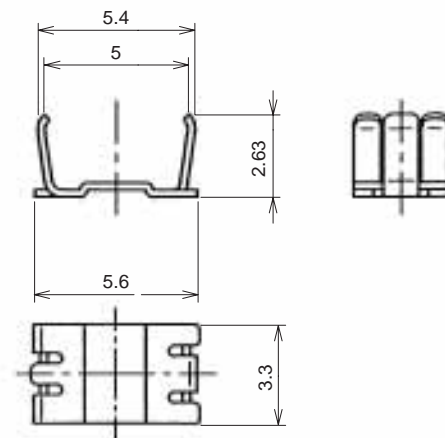


Part Number	CL No.	Material	Finish
GT5-1P/S-CSB	755-0048-2	Brass	Tin plating

Top Shield cover

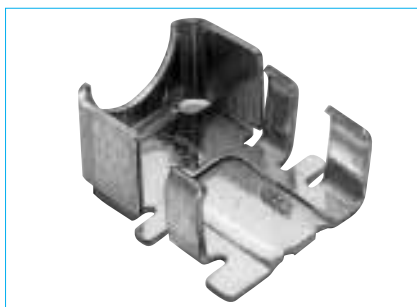


Mounted Condition Installed

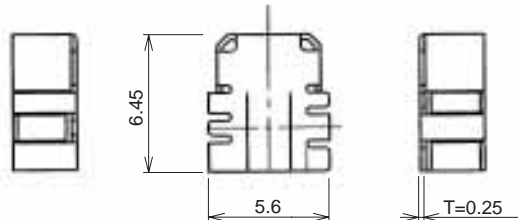

Part Number	CL No.
GT5C-1P-CSB	755-0088-7


GT5 with New Shielding Cover

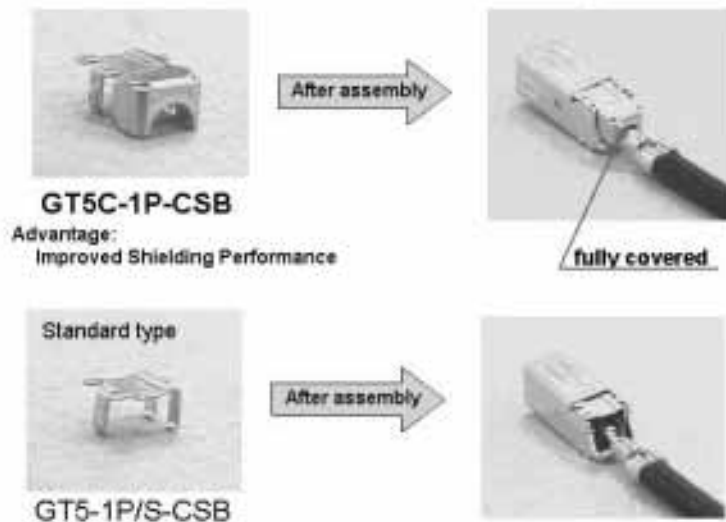

Panel Mounting In-line Bracket



GT-BK
GT-BK (01)

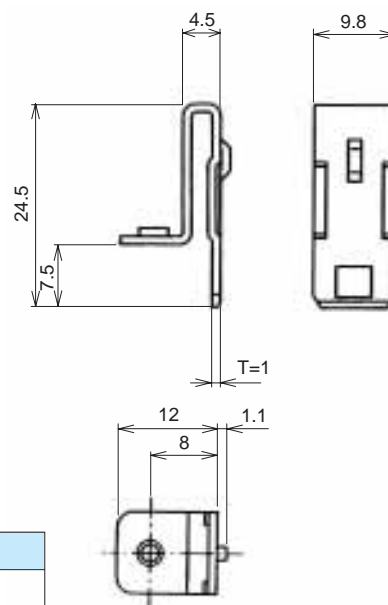

Part Number	CL No.	Material	Finish	Used with connectors
GT-BK	751-0039-6	SPCC	Tin plating	GT5-1PP-HU(A), GT5-1PP-HU(B), GT5-1PP-HU(C), GT5-1PP-HU(D), GT5-1PP-HU(E), GT5-1PP-HU(I), GT5-1PP-HU(J), GT5-1PP-HU(K), GT5-2/1PP-HU, GT5-2PP-HU, GT5-2PP-HU(A), GT5-2PP-HU(B), GT5-2PP-HU(C)
GT-BK(01)	751-0039-6-01		Zinc plating	

Termination Tools

User's manuals are available. Please ask your Hirose Electric account representative.

Automatic crimping machine



Part Number CM-105

Specifications

Item	Specification	Remarks
Specification	1.5tons	
Stroke length	30mm	
Number of strokes	200spm(50Hz)	200spm(60Hz)
Weight	75kg	
Motor	0.2kW	AC100V
Crimping speed	2000 to 4000pcs. Per day	

* Crimp height setting tables are available for each cable type. Please contact your nearest Hirose Electric account representative.
Different cables will require different crimp height settings.

GT5 Series

● Harnes Tool

Name of Applicable Terminal	Name of Applicable Applicator	CL No.
GT5-30/1.6-2.9PCF	AP105-GT5-30/1.6-2.9P-ID	CL901-5019-6
	AP105-GT5-30/1.6-2.9P	CL901-5017-0
	AP105-GT5-30/1.6-2.9P-A	CL901-5040-2
GT5-30/1.6-2.9SCF	AP105-GT5-30/1.6-2.9S-ID	CL901-5020-5
	AP105-GT5-30/1.6-2.9S	CL901-5018-3
GT5-2428/1.6-2.9PCF	AP105-GT5-2428/1.6-2.9P	CL901-5029-0
	AP105-GT5-2428/1.6-2.9PWS	CL901-5031-1
GT5-2428/1.6-2.9SCF	AP105-GT5-2428/1.6-2.9S	CL901-5030-9
	AP105-GT5-2428/1.6-2.9SWS	CL901-5032-4
GT5-2428/F3.3-5PCF	AP105-GT5-2428/F3.3-5P-ID	CL901-5037-8
GT5-2428/F3.3-5SCF	AP105-GT5-2428/F3.3-5S-ID	CL901-5038-0
GT5-2022/F3.3-5PCF	AP105-GT5-2022/F3.3-5P-ID	CL901-5058-8
	AP105-GT5-2022/F3.3-5P	CL901-5059-0
	AP105-GT5-2022/F3.3-5P2.2D-ID	CL901-5070-3
GT5-2022/F3.3-5SCF	AP105-GT5-2022/F3.3-5S-ID	CL901-5060-0
	AP105-GT5-2022/F3.3-5S	CL901-5061-2
	AP105-GT5-2022/F3.3-5S2.2D-ID	CL901-5071-6
GT5-30/F4-5PCF	AP105-GT5-30/F4-5P-ID	CL901-5033-7
GT5-30/F4-5SCF	AP105-GT5-30/F4-5S-ID	CL901-5034-0
GT5-2428/F4-5PCF	AP105-GT5-2428/F4-5P-ID	CL901-5035-2
	AP105-GT5-2428/F4-5P-3C2V	CL901-5056-2
GT5-2428/F4-5SCF	AP105-GT5-2428/F4-5S-ID	CL901-5036-5
	AP105-GT5-2428/F4-5S-3C2V	CL901-5057-5
GT5-2022/F4-5PCF	AP105-GT5-2022/F4-5P-ID	CL901-5054-7
	AP105-GT5-2022/F4-5P	CL901-5052-1
GT5-2022/F4-5SCF	AP105-GT5-2022/F4-5S-ID	CL901-5055-0
	AP105-GT5-2022/F4-5S	CL901-5053-4
GT5-30/0.7-1.5PCF	AP105-GT5-30/0.7-1.5P	CL901-5021-8
GT5-30/0.7-1.5SCF	AP105-GT5-30/0.7-1.5S	CL901-5080-7
GT5-2022/F2.7-3.5PCF	AP105-GT5-2022/F2.7-3.5P	CL901-5091-3
GT5-2022/F2.7-3.5SCF	AP105-GT5-2022/F2.7-3.5S	CL901-5092-6
GT5-2022/1.6-2.9SCF	AP105-GT5-2022/1.6-2.9S	CL901-5088-9
GT5-2022/F3.3-3.8PCF	AP105-GT5-2022/3.3-3.8P	
GT5-2022/F3.3-3.8SCF	AP105-GT5-2022/3.3-3.8S	
GT5-2428/1.6-2.5PCF	AP105-GT5-2428/1.6-2.5P	CL901-5100-3
GT5-2428/1.6-2.5SCF	AP105-GT5-2428/1.6-2.5S	CL901-5101-5
GT5-2428/1.6-2.9PCF	AP105-GT5-2428/1.6-2.9P-B	CL901-5103-0
GT5-2428/1.6-2.9SCF	AP105-GT5-2428/1.6-2.9S-B	CL901-5104-6
GT5-2022/F4-5SCF	AP105-GT5-2022/F4-5S-18ID	CL901-5102-8
	AP105-GT5-2022/F4-5S-RG58	CL901-5015-6
GT5-2022/F4-5PCF	AP105-GT5-2022/F4-5P-RG58	CL901-5016-9