



Data Display Products®

T-1³/₄ PCB MOUNT LEDs

Medium Profile, Array



- 4-LED or Variable Right Angle Array
- For Detailed LED Data, See Discrete Section, MODEL 190

Model		LED				
			Color	λ_{pk} (nm)	$I_v^{(2)}$ (mcd)	Tint
PCL1904	Right Angle	-SR	RED	655	2	Diffused
PCLR190N⁽¹⁾	Right Angle	-LR	RED	635	12	Diffused
		-LCR	RED	635	34	Clear tinted
		-LA	AMB	585	7	Diffused
		-LCA	AMB	585	38	Clear tinted
		-LG	GRN	565	12	Diffused
		-LGG	GRN	565	38	Clear tinted

- [1] Replace N with the number of LEDs in the array, 2 - 4 (e.g. PCLR1903).
 [2] I_v = typical luminous intensity @ $I_f = 20\text{mA}$ ($T_a = 25^\circ\text{C}$).

To Order: Select one **BOLD** component from each **SHADED** column in the table.
Example: Part Number **PCLR1903-LG**:

Model	LED
PCLR1903	-LG

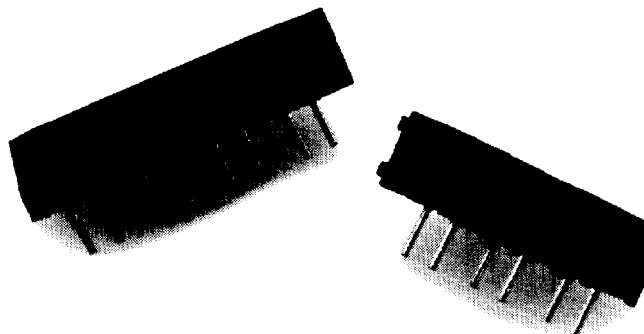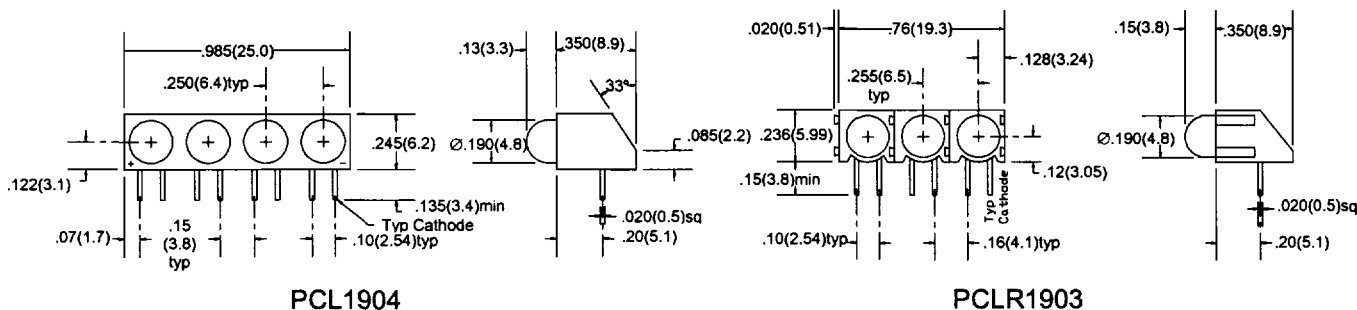

All dimensions are in inches(mm)
 Tolerances: .xx"(x) ±.025"(.63) / .xxx"(.xx) ±.010"(.25)
 Specifications are subject to change without notice.