
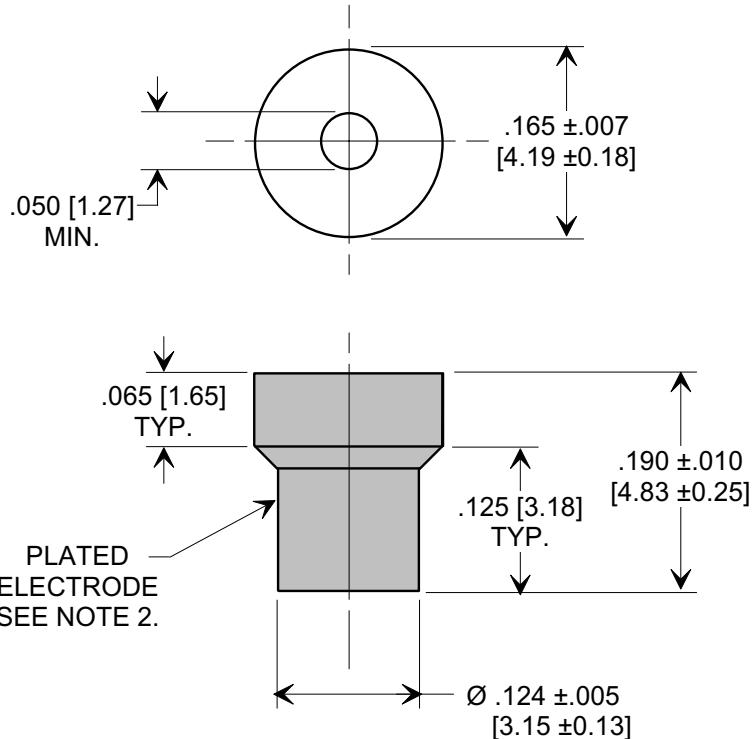



This drawing is the property of
Tusonix, Inc., and may not be
used, reproduced, published or
disclosed to others without ex-
pressed authorization by Tusonix Inc.

Electrical Testing
per Tusonix standard
test plans and Mil-Std-202
Test Methods.

MARKETING SALES DRAWING
DIMENSIONS IN INCHES - DO NOT SCALE THIS DRAWING
DIMENSIONS IN METRIC - []



OPERATING INFORMATION	
STYLE NO.	2461-019
VALUE	68 pF
VALUE TOL.	±20%
TEMP. COEF.	P3K
RATING	200VDC @ 85°C
OPERATING RANGE	-55°C,+125°C
DWV	600 VDC
I.R. MIN. @ .100 VDC	10 G Ω
TO TUSONIX SPEC. UNLESS STATED OTHERWISE.	

NOTES:

1. TUSONIX RESERVED STANDARD PART NUMBER:
2461-019-P3K0-680M.
TUSONIX RESERVED RoHS COMPLIANT PART NUMBER:
2461-019-P3K0-680M LF
CUSTOMER MUST SPECIFY STANDARD OR RoHS PART
NUMBER WHEN ORDERING.
2. ELECTRODE FINISH: STANDARD PART #: 60/40 SOLDER PLATED.
RoHS PART #: MATTE TIN PLATED.
3. PART MARKING: STANDARD PART: NO MARKING.
RoHS PART: MARKING ON PACKAGING ONLY.

REVISION RECORD					--TOLERANCES-- Unless Otherwise Specified	Title	
						SHOULDER FEED-THRU	
20061003-2-04					DECIMAL ± / / /		
20070713-3-03					ANGLES ± / / /	Approved B.Mc. 07-24-06	
X2015 Rev.0	TUSONIX TUCSON, ARIZONA	A	2461-019-P3K0-680M				