

Aluminum Capacitors + 85 °C, Powerlytic® Electrolytics




Fig.1 Component outlines

| QUICK REFERENCE DATA | |
|-----------------------|---|
| DESCRIPTION | VALUE |
| Operating temperature | - 20 °C to + 85 °C |
| Tolerance on C_R : | |
| 3 WVDC to 75 WVDC | + 75 %, - 10 % |
| 100 WVDC to 450 WVDC | + 50 %, - 10 % |
| Dissipation Factor: | |
| 3 WVDC and 6 WVDC | 230 % |
| 10 WVDC and 15 WVDC | 150 % |
| 25 WVDC and 30 WVDC | 60 % |
| 40 WVDC and 50 WVDC | 45 % |
| 75 WVDC and 100 WVDC | 30 % |
| 150 WVDC to 450 WVDC | 18 % |
| Ripple current | 20 to 3140 maximum amperes rms at 120 Hz and + 120 °C, depending upon capacitance |
| Useful life at 85 °C | 500 hours |


FEATURES

- Designed for applications requiring greatest possible capacitance in small physical case sizes
- Supplement original Type 36D can-type capacitors, offering lower capacitance values in smaller sizes with axial leads
- Welds at all critical anode and cathode terminals eliminate riveted or pressure connections to assure freedom from open circuits even when operated in the microvolt or millivolt signal range
- Improved molded phenolic and seals
- Pressure-sensitive safety vent
- Service life of 10 years or more in normal circuit applications
- Capacitors listed have outer plastic-film insulation. For bare case, change last character of part number from 6 to 0 and subtract 0.062" [1.575 mm] from diameter and 0.125" [3.175 mm] from length



| DIMENSIONS in inches [millimeters] | | | | | | | | |
|------------------------------------|----------------|----------------|-----------|----------------|----------------|-----------|----------------|----------------|
| CASE CODE | D | L | CASE CODE | D | L | CASE CODE | D | L |
| | ± 0.020 [0.51] | ± 0.062 [1.58] | | ± 0.020 [0.51] | ± 0.062 [1.58] | | ± 0.020 [0.51] | ± 0.062 [1.58] |
| EE | 0.510 [13.0] | 1.141 [29.0] | GJ | 0.760 [19.3] | 1.641 [41.7] | JE | 1.010 [25.7] | 1.141 [29.0] |
| EJ | 0.510 [13.0] | 1.641 [41.7] | GL | 0.760 [19.3] | 2.141 [54.4] | JJ | 1.010 [25.7] | 1.641 [41.7] |
| EL | 0.510 [13.0] | 2.141 [54.4] | GP | 0.760 [19.3] | 2.641 [67.1] | JL | 1.010 [25.7] | 2.141 [54.4] |
| FE | 0.635 [16.1] | 1.141 [29.0] | HE | 0.885 [22.5] | 1.141 [29.0] | JP | 1.010 [25.7] | 2.641 [67.1] |
| FJ | 0.635 [16.1] | 1.641 [41.7] | HJ | 0.885 [22.5] | 1.641 [41.7] | JS | 1.010 [25.7] | 3.141 [79.8] |
| FL | 0.635 [16.1] | 2.141 [54.4] | HL | 0.885 [22.5] | 2.141 [54.4] | JT | 1.010 [25.7] | 3.641 [92.5] |
| FP | 0.635 [16.1] | 2.641 [67.1] | HP | 0.885 [22.5] | 2.641 [67.1] | - | - | - |
| GE | 0.760 [19.3] | 1.141 [29.0] | HS | 0.885 [22.5] | 3.141 [79.8] | - | - | - |

DIMENSIONS AND AVAILABLE FORMS

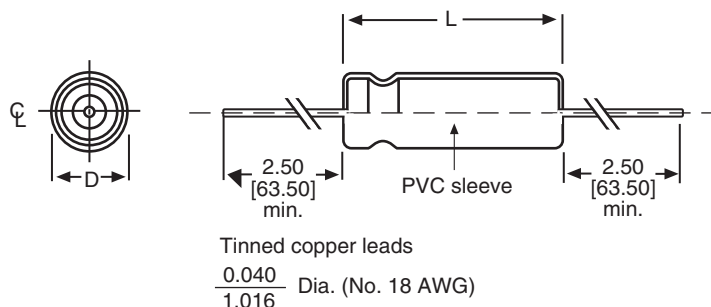



Aluminum Capacitors
+ 85 °C, Powerlytic® Electrolytics

Vishay Sprague

ORDERING EXAMPLE

Electrolytic capacitor 39D series: 39D 907 G 003 EJ 6

| DESCRIPTION | |
|-------------|--|
| CODE | EXPLANATION |
| 39D | product type |
| 907 | capacitance value (900 μF) |
| G | tolerance (G = - 10 %/+ 75 %; F = - 10 %/+ 50 %) |
| 003 | voltage rating at 85 °C (003 = 3 V) |
| EJ | can size (see dimensions table) |
| 6 | sleeve and sealing (6 = P.V.C. sleeve) |

| ELECTRICAL DATA AND ORDERING INFORMATION | | |
|--|-----------|---------------|
| CAPACITANCE (μF) | CASE CODE | PART NUMBER |
| 3 WVDC at + 85 °C, SURGE = 4 V | | |
| 400 | EE | 39D407G003EE6 |
| 900 | EJ | 39D907G003EJ6 |
| 1300 | EL | 39D138G003EL6 |
| 1400 | GE | 39D148G003GE6 |
| 1800 | FJ | 39D188G003FJ6 |
| 2100 | HE | 39D218G003HE6 |
| 2700 | FL | 39D278G003FL6 |
| 2900 | GJ | 39D298G003GJ6 |
| 3000 | JE | 39D308G003JE6 |
| 3600 | FP | 39D368G003FP6 |
| 4200 | HJ | 39D428G003HJ6 |
| 4300 | GL | 39D438G003GL6 |
| 5700 | GP | 39D578G003GP6 |
| 6000 | JJ | 39D608G003JJ6 |
| 8500 | HP | 39D858G003HP6 |
| 9000 | JL | 39D908G003JL6 |
| 10 000 | HS | 39D109G003HS6 |
| 12 000 | JP | 39D129G003JP6 |
| 15 000 | JS | 39D159G003JS6 |
| 18 000 | JT | 39D189G003JT6 |
| 6 WVDC at + 85 °C, SURGE = 8 V | | |
| 300 | EE | 39D307G006EE6 |
| 600 | EJ | 39D607G006EJ6 |
| 900 | EL | 39D907G006EL6 |
| 1000 | GE | 39D108G006GE6 |
| 1200 | FJ | 39D128G006FJ6 |
| 1500 | HE | 39D158G006HE6 |
| 1900 | FL | 39D198G006FL6 |
| 2000 | GJ | 39D208G006GJ6 |
| 2100 | JE | 39D218G006JE6 |
| 2500 | FP | 39D258G006FP6 |
| 3000 | GL | 39D308G006GL6 |
| 4000 | GP | 39D408G006GP6 |
| 4200 | JJ | 39D428G006JJ6 |
| 6000 | HP | 39D608G006HP6 |
| 6300 | JL | 39D638G006JL6 |
| 7500 | HS | 39D758G006HS6 |
| 8500 | JP | 39D858G006JP6 |
| 10 000 | JS | 39D109G006JS6 |
| 12 000 | JT | 39D129G006JT6 |

Notes

(1) These values are normally stocked. Case codes subject to change without notice.
'4' suffix was clear PVC sleeve. '6' is blue

**ELECTRICAL DATA AND ORDERING INFORMATION**

| CAPACITANCE (μF) | CASE CODE | PART NUMBER |
|---|-----------|---------------|
| 10 WVDC at + 85 °C, SURGE = 12 V | | |
| 250 | EE | 39D257G010EE6 |
| 500 | EJ | 39D507G010EJ6 |
| 800 | EL | 39D807G010EL6 |
| 850 | GE | 39D857G010GE6 |
| 1000.0 ⁽¹⁾ | FJ | 39D108G010FJ6 |
| 1200 | HE | 39D128G010HE6 |
| 1600 | FL | 39D168G010FL6 |
| 1700 | GJ | 39D178G010GJ6 |
| 2100 | FP | 39D218G010FP6 |
| 2500 | GL | 39D258G010GL6 |
| 3400 | GP | 39D348G010GP6 |
| 3500 | JJ | 39D358G010JJ6 |
| 5000 | HP | 39D508G010HP6 |
| 5200 | JL | 39D528G010JL6 |
| 6300 | HS | 39D638G010HS6 |
| 7100 | JP | 39D718G010JP6 |
| 8800 | JS | 39D888G010JS6 |
| 10 000 | JT | 39D109G010JT6 |
| 15 WVDC at + 85 °C, SURGE = 18 V | | |
| 200 | EE | 39D207G015EE6 |
| 400 | EJ | 39D407G015EJ6 |
| 600 | EL | 39D607G015EL6 |
| 800 | FJ | 39D807G015FJ6 |
| 950 | HE | 39D957G015HE6 |
| 1200.0 ⁽¹⁾ | FL | 39D128G015FL6 |
| 1300 | GJ | 39D138G015GJ6 |
| 1600 | FP | 39D168G015FP6 |
| 1900 | GL | 39D198G015GL6 |
| 2500 | GP | 39D258G015GP6 |
| 2600 | JJ | 39D268G015JJ6 |
| 3800 | HP | 39D388G015HP6 |
| 4000 | JL | 39D408G015JL6 |
| 4700 | HS | 39D478G015HS6 |
| 5300 | JP | 39D538G015JP6 |
| 6600 | JS | 39D668G015JS6 |
| 8000.0 ⁽¹⁾ | JT | 39D808G015JT6 |
| 25 WVDC at + 85 °C, SURGE = 30 V | | |
| 100 | EE | 39D107G025EE6 |
| 200 | EJ | 39D207G025EJ6 |
| 350 | EL | 39D357G025EL6 |
| 450 | FJ | 39D457G025FJ6 |
| 500.0 ⁽¹⁾ | HE | 39D507G025HE6 |
| 700 | FL | 39D707G025FL6 |
| 750 | GJ | 39D757G025GJ6 |
| 800 | JE | 39D807G025JE6 |
| 950 | FP | 39D957G025FP6 |
| 1000.0 ⁽¹⁾ | GL | 39D108G025GL6 |
| 1100 | HJ | 39D118G025HJ6 |
| 1500 | GP | 39D158G025GP6 |
| 1600 | JJ | 39D168G025JJ6 |
| 1700 | HL | 39D178G025HL6 |
| 2200.0 ⁽¹⁾ | HP | 39D228G025HP6 |
| 2400 | JL | 39D248G025JL6 |
| 2800 | HS | 39D288G025HS6 |
| 3200 | JP | 39D328G025JP6 |
| 4000.0 ⁽¹⁾ | JS | 39D408G025JS6 |
| 4700.0 ⁽¹⁾ | JT | 39D478G025JT6 |

Notes

⁽¹⁾ These values are normally stocked. Case codes subject to change without notice.
'4' suffix was clear PVC sleeve. '6' is blue

Aluminum Capacitors
+ 85 °C, Powerlytic® Electrolytics

Vishay Sprague

| ELECTRICAL DATA AND ORDERING INFORMATION | | |
|---|------------------|--------------------|
| CAPACITANCE (µF) | CASE CODE | PART NUMBER |
| 30 WVDC at + 85 °C, SURGE = 40 V | | |
| 75 | EE | 39D756G030EE6 |
| 150 | EJ | 39D157G030EJ6 |
| 250 | EL | 39D257G030EL6 |
| 350 | FJ | 39D357G030FJ6 |
| 400 | HE | 39D407G030HE6 |
| 500.0 ⁽¹⁾ | FL | 39D507G030FL6 |
| 600.0 ⁽¹⁾ | JE | 39D607G030JE6 |
| 700 | FP | 39D707G030FP6 |
| 850 | GL | 39D857G030GL6 |
| 1100.0 ⁽¹⁾ | GP | 39D118G030GP6 |
| 1200 | HL | 39D128G030HL6 |
| 1700 | HP | 39D178G030HP6 |
| 1800 | JL | 39D188G030JL6 |
| 2100 | HS | 39D218G030HS6 |
| 2400 | JP | 39D248G030JP6 |
| 3000.0 ⁽¹⁾ | JS | 39D308G030JS6 |
| 3600 | JT | 39D368G030JT6 |
| 40 WVDC at + 85 °C, SURGE = 50 V | | |
| 75 | EE | 39D756G040EE6 |
| 150 | EJ | 39D157G040EJ6 |
| 200 | EL | 39D207G040EL6 |
| 250 | GE | 39D257G040GE6 |
| 300 | FJ | 39D307G040FJ6 |
| 350 | HE | 39D357G040HE6 |
| 450 | FL | 39D457G040FL6 |
| 500.0 ⁽¹⁾ | GJ | 39D507G040GJ6 |
| 600 | FP | 39D607G040FP6 |
| 750 | GL | 39D757G040GL6 |
| 1000.0 ⁽¹⁾ | GP | 39D108G040GP6 |
| 1100 | HL | 39D118G040HL6 |
| 1500 | HP | 39D158G040HP6 |
| 1600 | JL | 39D168G040JL6 |
| 1900 | HS | 39D198G040HS6 |
| 2100 | JP | 39D218G040JP6 |
| 2600 | JS | 39D268G040JS6 |
| 3200 | JT | 39D328G040JT6 |
| 50 WVDC at + 85 °C, SURGE = 65 V | | |
| 50 | EE | 39D506G050EE6 |
| 100 | EJ | 39D107G050EJ6 |
| 150 | EL | 39D157G050EL6 |
| 200.0 ⁽¹⁾ | FJ | 39D207G050FJ6 |
| 250.0 ⁽¹⁾ | HE | 39D257G050HE6 |
| 350 | FL | 39D357G050FL6 |
| 450 | FP | 39D457G050FP6 |
| 500.0 ⁽¹⁾ | GL | 39D507G050GL6 |
| 700 | GP | 39D707G050GP6 |
| 750 | JJ | 39D757G050JJ6 |
| 800.0 ⁽¹⁾ | HL | 39D807G050HL6 |
| 1100.0 ⁽¹⁾ | HP | 39D118G050HP6 |
| 1300 | HS | 39D138G050HS6 |
| 1500 | JP | 39D158G050JP6 |
| 1900 | JS | 39D198G050JS6 |
| 2300.0 ⁽¹⁾ | JT | 39D238G050JT6 |

Notes

⁽¹⁾ These values are normally stocked. Case codes subject to change without notice.
'4' suffix was clear PVC sleeve. '6' is blue

**ELECTRICAL DATA AND ORDERING INFORMATION**

| CAPACITANCE (µF) | CASE CODE | PART NUMBER |
|---|-----------|---------------|
| 75 WVDC at + 85 °C, SURGE = 95 V | | |
| 30 | EE | 39D306G075EE6 |
| 75 | EJ | 39D756G075EJ6 |
| 100 | EL | 39D107G075EL6 |
| 150.0 ⁽¹⁾ | FJ | 39D157G075FJ6 |
| 200 | FL | 39D207G075FL6 |
| 250.0 ⁽¹⁾ | JE | 39D257G075JE6 |
| 300 | FP | 39D307G075FP6 |
| 350 | GL | 39D357G075GL6 |
| 450 | GP | 39D457G075GP6 |
| 500 | HL | 39D507G075HL6 |
| 700 | HP | 39D707G075HP6 |
| 750 | JL | 39D757G075JL6 |
| 850 | HS | 39D857G075HS6 |
| 1000.0 ⁽¹⁾ | JP | 39D108G075JP6 |
| 1200 | JS | 39D128G075JS6 |
| 1500 | JT | 39D158G075JT6 |
| 100 WVDC at + 85 °C, SURGE = 125 V | | |
| 15 | EE | 39D156F100EE6 |
| 35 | EJ | 39D356F100EJ6 |
| 55 | EL | 39D556F100EL6 |
| 60 | GE | 39D606F100GE6 |
| 75 | FJ | 39D756F100FJ6 |
| 90 | HE | 39D906F100HE6 |
| 110 | FL | 39D117F100FL6 |
| 120 | GJ | 39D127F100GJ6 |
| 130 | JE | 39D137F100JE6 |
| 150 | FP | 39D157F100FP6 |
| 180 | HJ | 39D187F100HJ6 |
| 190 | GL | 39D197F100GL6 |
| 250 | GP | 39D257F100GP6 |
| 260 | JJ | 39D267F100JJ6 |
| 280 | HL | 39D287F100HL6 |
| 370 | HP | 39D377F100HP6 |
| 390 | JL | 39D397F100JL6 |
| 460 | HS | 39D467F100HS6 |
| 520 | JP | 39D527F100JP6 |
| 650 | JS | 39D657F100JS6 |
| 780 | JT | 39D787F100JT6 |
| 150 WVDC at + 85 °C, SURGE = 175 V | | |
| 10 | EE | 39D106F150EE6 |
| 25 | EJ | 39D256F150EJ6 |
| 40 | EL | 39D406F150EL6 |
| 50 | FJ | 39D506F150FJ6 |
| 60 | HE | 39D606F150HE6 |
| 80 | FL | 39D806F150FL6 |
| 85 | GJ | 39D856F150GJ6 |
| 88 | JE | 39D886F150JE6 |
| 100 | FP | 39D107F150FP6 |
| 120 | GL | 39D127F150GL6 |
| 170 | GP | 39D177F150GP6 |
| 190 | HL | 39D197F150HL6 |
| 250 | HP | 39D257F150HP6 |
| 260 | JL | 39D267F150JL6 |
| 310 | HS | 39D317F150HS6 |
| 350 | JP | 39D357F150JP6 |
| 440 | JS | 39D447F150JS6 |
| 530 | JT | 39D537F150JT4 |

Notes

⁽¹⁾ These values are normally stocked. Case codes subject to change without notice.
'4' suffix was clear PVC sleeve. '6' is blue



Aluminum Capacitors
+ 85 °C, Powerlytic® Electrolytics

Vishay Sprague

| ELECTRICAL DATA AND ORDERING INFORMATION | | |
|---|------------------|--------------------|
| CAPACITANCE (µF) | CASE CODE | PART NUMBER |
| 200 WVDC at + 85 °C, SURGE = 250 V | | |
| 9 | EE | 39D905F200EE6 |
| 15 | EJ | 39D156F200EJ6 |
| 25 | EL | 39D256F200EL6 |
| 30 | GE | 39D306F200GE6 |
| 35 | FJ | 39D356F200FJ6 |
| 40 | HE | 39D406F200HE6 |
| 55 | FL | 39D556F200FL6 |
| 60 | GJ | 39D606F200GJ6 |
| 75 | FP | 39D756F200FP6 |
| 80 | HJ | 39D806F200HJ6 |
| 90 | GL | 39D906F200GL6 |
| 120 | GP | 39D127F200GP6 |
| 130 | HL | 39D137F200HL6 |
| 170 | HP | 39D177F200HP6 |
| 180 | JL | 39D187F200JL6 |
| 220 | HS | 39D227F200HS6 |
| 250 | JP | 39D257F200JP6 |
| 310 | JS | 39D317F200JS6 |
| 370 | JT | 39D377F200JT6 |
| 250 WVDC at + 85 °C, SURGE = 300 V | | |
| 7 | EE | 39D705F250EE6 |
| 15 | EJ | 39D156F250EJ6 |
| 20 | EL | 39D206F250EL6 |
| 30 | FJ | 39D306F250FJ6 |
| 35 | HE | 39D356F250HE6 |
| 45 | FL | 39D456F250FL6 |
| 50.0 ⁽¹⁾ | JE | 39D506F250JE6 |
| 60 | FP | 39D606F250FP6 |
| 70 | GL | 39D706F250GL6 |
| 95 | GP | 39D956F250GP6 |
| 100.0 ⁽¹⁾ | HL | 39D107F250HL6 |
| 140 | HP | 39D147F250HP6 |
| 150.0 ⁽¹⁾ | JL | 39D157F250JL6 |
| 180 | HS | 39D187F250HS6 |
| 200.0 ⁽¹⁾ | JP | 39D207F250JP6 |
| 250 | JS | 39D257F250JS6 |
| 300.0 ⁽¹⁾ | JT | 39D307F250JT6 |
| 300 WVDC at + 85 °C, SURGE = 350 V | | |
| 5 | EE | 39D505F300EE6 |
| 10 | EJ | 39D106F300EJ6 |
| 15 | EL | 39D156F300EL6 |
| 20 | FJ | 39D206F300FJ6 |
| 25 | HE | 39D256F300HE6 |
| 30 | FL | 39D306F300FL6 |
| 40 | FP | 39D406F300FP6 |
| 50 | GL | 39D506F300GL6 |
| 65 | GP | 39D656F300GP6 |
| 75 | HL | 39D756F300HL6 |
| 300 WVDC at + 85 °C, SURGE = 350 V | | |
| 100 | HP | 39D107F300HP6 |
| 120 | HS | 39D127F300HS6 |
| 130 | JP | 39D137F300JP6 |
| 170 | JS | 39D177F300JS6 |
| 200 | JT | 39D207F300JT6 |

Notes

⁽¹⁾ These values are normally stocked. Case codes subject to change without notice.
'4' suffix was clear PVC sleeve. '6' is blue

**ELECTRICAL DATA AND ORDERING INFORMATION**

| CAPACITANCE (μF) | CASE CODE | PART NUMBER |
|---|-----------|---------------|
| 350 WVDC at + 85 °C, SURGE = 400 V | | |
| 4 | EE | 39D405F350EE6 |
| 8 | EJ | 39D805F350EJ6 |
| 12 | EL | 39D126F350EL6 |
| 15 | FJ | 39D156F350FJ6 |
| 20 | FL | 39D206F350FL6 |
| 25 | GJ | 39D256F350GJ6 |
| 30 | FP | 39D306F350FP6 |
| 40 | GL | 39D406F350GL6 |
| 50 | GP | 39D506F350GP6 |
| 60 | HL | 39D606F350HL6 |
| 80 | HP | 39D806F350HP6 |
| 100 | HS | 39D107F350HS6 |
| 110 | JP | 39D117F350JP6 |
| 130 | JS | 39D137F350JS6 |
| 160 | JT | 39D167F350JT6 |
| 400 WVDC at + 85 °C, SURGE = 475 V | | |
| 2 | EE | 39D205F400EE6 |
| 5 | EJ | 39D505F400EJ6 |
| 10 | FJ | 39D106F400FJ6 |
| 15 | F | 39D156F400FL6 |
| 20 | F | 39D206F400FP6 |
| 25 | GL | 39D256F400GL6 |
| 35 | GP | 39D356F400GP6 |
| 40 | HL | 39D406F400HL6 |
| 55 | HP | 39D556F400HP6 |
| 65 | HS | 39D656F400HS6 |
| 75 | JP | 39D756F400JP6 |
| 90 | JS | 39D906F400JS6 |
| 110 | JT | 39D117F400JT6 |
| 450 WVDC at + 85 °C, SURGE = 525 V | | |
| 1 | EE | 39D105F450EE6 |
| 3 | EJ | 39D305F450EJ6 |
| 5 | EL | 39D505F450EL6 |
| 10 | FL | 39D106F450FL6 |
| 15 | FP | 39D156F450FP6 |
| 20 | GL | 39D206F450GL6 |
| 25 | GP | 39D256F450GP6 |
| 35 | HP | 39D356F450HP6 |
| 45 | HS | 39D456F450HS6 |
| 50 | JP | 39D506F450JP6 |
| 65 | JS | 39D656F450JS6 |
| 75 | JT | 39D756F450JT6 |

Notes

⁽¹⁾ These values are normally stocked. Case codes subject to change without notice.

- '4' suffix was clear PVC sleeve. '6' is blue



Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.