


## TRANSZORB® Transient Voltage Suppressors

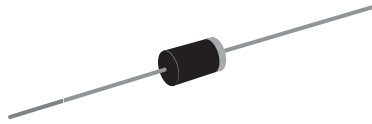

DO-204AC (DO-15)

PRIMARY CHARACTERISTICS	
$V_{BR}$ uni-directional	6.8 V to 540 V
$V_{BR}$ bi-directional	6.8 V to 440 V
$P_{PPM}$	600 W
$P_D$	5.0 W
$I_{FSM}$ (uni-directional only)	100 A
$T_J$ max.	175 °C

### DEVICES FOR BI-DIRECTION APPLICATIONS

For bi-directional types, use C or CA suffix (e.g. P6KE440CA).

Electrical characteristics apply in both directions.

### FEATURES

- Glass passivated chip junction
- Available in uni-directional and bi-directional
- 600 W peak pulse power capability with a 10/1000  $\mu$ s waveform, repetitive rate (duty cycle): 0.01 %
- Excellent clamping capability
- Very fast response time
- Low incremental surge resistance
- Solder dip 260 °C, 40 s
- Component in accordance to RoHS 2002/95/EC and WEEE 2002/96/EC



RoHS  
COMPLIANT

### TYPICAL APPLICATIONS

Use in sensitive electronics protection against voltage transients induced by inductive load switching and lighting on ICs, MOSFET, signal lines of sensor units for consumer, computer, industrial, automotive and telecommunication.

### MECHANICAL DATA

**Case:** DO-204AC, molded epoxy over passivated chip  
Molding compound meets UL 94 V-0 flammability rating

Base P/N-E3 - RoHS compliant, commercial grade

Base P/NHE3 - RoHS compliant, high reliability/automotive grade (AEC Q101 qualified)

**Terminals:** Matte tin plated leads, solderable per J-STD-002 and JESD22-B102

E3 suffix meets JESD 201 class 1A whisker test, HE3 suffix meets JESD 201 class 2 whisker test

**Note:**

- P6KE250 ~ P6KE540A and P6KE250C ~ P6KE440CA for commercial grade only

**Polarity:** For uni-directional types the color band denotes cathode end, no marking on bi-directional types

MAXIMUM RATINGS ( $T_A = 25$ °C unless otherwise noted)			
PARAMETER	SYMBOL	VALUE	UNIT
Peak power dissipation with a 10/1000 $\mu$ s waveform <sup>(1)</sup> (Fig. 1)	$P_{PPM}$	600	W
Peak pulse current with a 10/1000 $\mu$ s waveform <sup>(1)</sup>	$I_{PPM}$	See next table	A
Power dissipation on infinite heatsink at $T_L = 75$ °C (Fig. 5)	$P_D$	5.0	W
Peak forward surge current, 8.3 ms single half sine-wave <sup>(2)</sup>	$I_{FSM}$	100	A
Maximum instantaneous forward voltage at 50 A for uni-directional only <sup>(3)</sup>	$V_F$	3.5/5.0	V
Operating junction and storage temperature range	$T_J, T_{STG}$	- 55 to + 175	°C

**Notes:**

(1) Non-repetitive current pulse, per Fig. 3 and derated above  $T_A = 25$  °C per Fig. 2

(2) Measured on 8.3 ms single half sine-wave or equivalent square wave, duty cycle = 4 per minute maximum

(3)  $V_F = 3.5$  V for P6KE220(A) and below;  $V_F = 5.0$  V for P6KE250(A) and above

# P6KE6.8 thru P6KE540A

Vishay General Semiconductor



ELECTRICAL CHARACTERISTICS (T <sub>A</sub> = 25 °C unless otherwise noted)								
DEVICE TYPE	BREAKDOWN VOLTAGE V <sub>BR</sub> AT I <sub>T</sub> <sup>(1)</sup> (V)		TEST CURRENT I <sub>T</sub> (mA)	STAND-OFF VOLTAGE V <sub>WM</sub> (V)	MAXIMUM REVERSE LEAKAGE AT V <sub>WM</sub> <sup>(3)</sup> I <sub>D</sub> (μA)	PEAK PULSE CURRENT I <sub>PPM</sub> <sup>(2)</sup> (A)	MAXIMUM CLAMPING VOLTAGE AT I <sub>PPM</sub> V <sub>C</sub> (V)	MAXIMUM TEMPERATURE COEFFICIENT OF V <sub>BR</sub> (%/°C)
	MIN.	MAX.						
(+)P6KE6.8	6.12	7.48	10	5.50	1000	55.6	10.8	0.057
(+)P6KE6.8A	6.45	7.14	10	5.80	1000	57.1	10.5	0.057
(+)P6KE7.5	6.75	8.25	10	6.05	500	51.3	11.7	0.061
(+)P6KE7.5A	7.13	7.88	10	6.40	500	53.1	11.3	0.061
(+)P6KE8.2	7.38	9.02	10	6.63	200	48.0	12.5	0.065
(+)P6KE8.2A	7.79	8.61	10	7.02	200	49.6	12.1	0.065
(+)P6KE9.1	8.19	10.0	1.0	7.37	50	43.5	13.8	0.068
(+)P6KE9.1A	8.65	9.55	1.0	7.78	50	44.8	13.4	0.068
(+)P6KE10	9.00	11.0	1.0	8.10	10	40.0	15.0	0.073
(+)P6KE10A	9.50	10.5	1.0	8.55	10	41.4	14.5	0.073
(+)P6KE11	9.90	12.1	1.0	8.92	5.0	37.0	16.2	0.075
(+)P6KE11A	10.5	11.6	1.0	9.40	5.0	38.5	15.6	0.075
(+)P6KE12	10.8	13.2	1.0	9.72	5.0	34.7	17.3	0.078
(+)P6KE12A	11.4	12.6	1.0	10.2	5.0	35.9	16.7	0.078
(+)P6KE13	11.7	14.3	1.0	10.5	5.0	31.6	19.0	0.081
(+)P6KE13A	12.4	13.7	1.0	11.1	5.0	33.0	18.2	0.081
(+)P6KE15	13.5	16.5	1.0	12.1	1.0	27.3	22.0	0.084
(+)P6KE15A	14.3	15.8	1.0	12.8	1.0	28.3	21.2	0.084
(+)P6KE16	14.4	17.6	1.0	12.9	1.0	25.5	23.5	0.086
(+)P6KE16A	15.2	16.8	1.0	13.6	1.0	26.7	22.5	0.086
(+)P6KE18	16.2	19.8	1.0	14.5	1.0	22.6	26.5	0.088
(+)P6KE18A	17.1	18.9	1.0	15.3	1.0	23.8	25.2	0.088
(+)P6KE20	18.0	22.0	1.0	16.2	1.0	20.6	29.1	0.090
(+)P6KE20A	19.0	21.0	1.0	17.1	1.0	21.7	27.7	0.090
(+)P6KE22	19.8	24.2	1.0	17.8	1.0	18.8	31.9	0.092
(+)P6KE22A	20.9	23.1	1.0	18.8	1.0	19.6	30.6	0.092
(+)P6KE24	21.6	26.4	1.0	19.4	1.0	17.3	34.7	0.094
(+)P6KE24A	22.8	25.2	1.0	20.5	1.0	18.1	33.2	0.094
(+)P6KE27	24.3	29.7	1.0	21.8	1.0	15.3	39.1	0.096
(+)P6KE27A	25.7	28.4	1.0	23.1	1.0	16.0	37.5	0.096
(+)P6KE30	27.0	33.0	1.0	24.3	1.0	13.8	43.5	0.097
(+)P6KE30A	28.5	31.5	1.0	25.6	1.0	14.5	41.4	0.097
(+)P6KE33	29.7	36.3	1.0	26.8	1.0	12.6	47.7	0.098
(+)P6KE33A	31.4	34.7	1.0	28.2	1.0	13.1	45.7	0.098
(+)P6KE36	32.4	39.6	1.0	29.1	1.0	11.5	52.0	0.099
(+)P6KE36A	34.2	37.8	1.0	30.8	1.0	12.0	49.9	0.099
(+)P6KE39	35.1	42.9	1.0	31.6	1.0	10.6	56.4	0.100
(+)P6KE39A	37.1	41.0	1.0	33.3	1.0	11.1	53.9	0.100
(+)P6KE43	38.7	47.3	1.0	34.8	1.0	9.7	61.9	0.101
(+)P6KE43A	40.9	45.2	1.0	36.8	1.0	10.1	59.3	0.101
(+)P6KE47	42.3	51.7	1.0	38.1	1.0	8.8	67.8	0.101
(+)P6KE47A	44.7	49.4	1.0	40.2	1.0	9.3	64.8	0.101



<b>ELECTRICAL CHARACTERISTICS</b> ( $T_A = 25\text{ }^\circ\text{C}$ unless otherwise noted)								
DEVICE TYPE	BREAKDOWN VOLTAGE $V_{BR}$ AT $I_T$ <sup>(1)</sup> (V)		TEST CURRENT $I_T$ (mA)	STAND-OFF VOLTAGE $V_{WM}$ (V)	MAXIMUM REVERSE LEAKAGE AT $V_{WM}$ <sup>(3)</sup> $I_D$ ( $\mu\text{A}$ )	PEAK PULSE CURRENT $I_{PPM}$ <sup>(2)</sup> (A)	MAXIMUM CLAMPING VOLTAGE AT $I_{PPM}$ $V_C$ (V)	MAXIMUM TEMPERATURE COEFFICIENT OF $V_{BR}$ (%/ $^\circ\text{C}$ )
	MIN.	MAX.						
(+)P6KE51	45.9	56.1	1.0	41.3	1.0	8.2	73.5	0.102
(+)P6KE51A	48.5	53.6	1.0	43.6	1.0	8.6	70.1	0.102
(+)P6KE56	50.4	61.6	1.0	45.4	1.0	7.5	80.5	0.103
(+)P6KE56A	53.2	58.8	1.0	47.8	1.0	7.8	77.0	0.103
(+)P6KE62	55.8	68.2	1.0	50.2	1.0	6.7	89.0	0.104
(+)P6KE62A	58.9	65.1	1.0	53.0	1.0	7.1	85.0	0.104
(+)P6KE68	61.2	74.8	1.0	55.1	1.0	6.1	98.0	0.104
(+)P6KE68A	64.6	71.4	1.0	58.1	1.0	6.5	92.0	0.104
(+)P6KE75	67.5	82.5	1.0	60.7	1.0	5.6	108	0.105
(+)P6KE75A	71.3	78.8	1.0	64.1	1.0	5.8	103	0.105
(+)P6KE82	73.8	90.2	1.0	66.4	1.0	5.1	118	0.105
(+)P6KE82A	77.9	86.1	1.0	70.1	1.0	5.3	113	0.105
(+)P6KE91	81.9	100	1.0	73.7	1.0	4.6	131	0.106
(+)P6KE91A	86.5	95.5	1.0	77.8	1.0	4.8	125	0.106
(+)P6KE100	90.0	110	1.0	81.0	1.0	4.2	144	0.106
(+)P6KE100A	95.0	105	1.0	85.5	1.0	4.4	137	0.106
(+)P6KE110	99.0	121	1.0	89.2	1.0	3.8	158	0.107
(+)P6KE110A	105	116	1.0	94.0	1.0	3.9	152	0.107
(+)P6KE120	108	132	1.0	97.2	1.0	3.5	173	0.107
(+)P6KE120A	114	126	1.0	102	1.0	3.6	165	0.107
(+)P6KE130	117	143	1.0	105	1.0	3.2	187	0.107
(+)P6KE130A	124	137	1.0	111	1.0	3.4	179	0.107
(+)P6KE150	135	165	1.0	121	1.0	2.8	215	0.108
(+)P6KE150A	143	158	1.0	128	1.0	2.9	207	0.108
(+)P6KE160	144	176	1.0	130	1.0	2.6	230	0.108
(+)P6KE160A	152	168	1.0	136	1.0	2.7	219	0.108
(+)P6KE170	153	187	1.0	138	1.0	2.5	244	0.108
(+)P6KE170A	162	179	1.0	145	1.0	2.6	234	0.108
(+)P6KE180	162	198	1.0	146	1.0	2.3	258	0.108
(+)P6KE180A	171	189	1.0	154	1.0	2.4	246	0.108
(+)P6KE200	180	220	1.0	162	1.0	2.1	287	0.108
(+)P6KE200A	190	210	1.0	171	1.0	2.2	274	0.108
(+)P6KE220	198	242	1.0	175	1.0	1.7	344	0.108
(+)P6KE220A	209	231	1.0	185	1.0	1.8	328	0.108
(+)P6KE250	225	275	1.0	202	1.0	1.7	360	0.110
(+)P6KE250A	237	263	1.0	214	1.0	1.7	344	0.110
(+)P6KE300	270	330	1.0	243	1.0	1.4	430	0.110
(+)P6KE300A	285	315	1.0	256	1.0	1.4	414	0.110
(+)P6KE350	315	385	1.0	284	1.0	1.2	504	0.110
(+)P6KE350A	333	368	1.0	300	1.0	1.2	482	0.110
(+)P6KE400	360	440	1.0	324	1.0	1.0	574	0.110
(+)P6KE400A	380	420	1.0	342	1.0	1.1	548	0.110

# P6KE6.8 thru P6KE540A

Vishay General Semiconductor



<b>ELECTRICAL CHARACTERISTICS</b> ( $T_A = 25\text{ }^\circ\text{C}$ unless otherwise noted)								
DEVICE TYPE	BREAKDOWN VOLTAGE $V_{BR}$ AT $I_T$ <sup>(1)</sup> (V)		TEST CURRENT $I_T$ (mA)	STAND-OFF VOLTAGE $V_{WM}$ (V)	MAXIMUM REVERSE LEAKAGE AT $V_{WM}$ <sup>(3)</sup> $I_D$ ( $\mu\text{A}$ )	PEAK PULSE CURRENT $I_{PPM}$ <sup>(2)</sup> (A)	MAXIMUM CLAMPING VOLTAGE AT $I_{PPM}$ $V_C$ (V)	MAXIMUM TEMPERATURE COEFFICIENT OF $V_{BR}$ (%/ $^\circ\text{C}$ )
	MIN.	MAX.						
(+)P6KE440	396	484	1.0	356	1.0	0.95	631	0.110
(+)P6KE440A	418	462	1.0	376	1.0	1.00	602	0.110
P6KE480	432	528	1.0	389	1.0	0.88	686	0.110
P6KE480A	456	504	1.0	408	1.0	0.91	658	0.110
P6KE510	459	561	1.0	413	1.0	0.82	729	0.110
P6KE510A	485	535	1.0	434	1.0	0.86	698	0.110
P6KE540	486	594	1.0	437	1.0	0.78	772	0.110
P6KE540A	513	567	1.0	459	1.0	0.81	740	0.110

**Notes:**

- (1) Pulse test:  $t_p \leq 50\text{ ms}$
- (2) Surge current waveform per Fig. 3 and derate per Fig. 2ogm
- (3) For bi-directional types with  $V_{WM}$  of 10 V and less, the  $I_D$  limit is doubled
- (4) All terms and symbols are consistent with ANSI/IEEE C62.35
- (+) Underwriters laboratory recognition for the classification of protectors (QVQG2) under the UL standard for safety 497B and file number E136766 for both uni-directional and bi-directional devices

<b>THERMAL CHARACTERISTICS</b> ( $T_A = 25\text{ }^\circ\text{C}$ unless otherwise noted)			
PARAMETER	SYMBOL	VALUE	UNIT
Typical thermal resistance, junction to lead	$R_{\theta JL}$	20	$^\circ\text{C/W}$
Typical thermal resistance, junction to ambient	$R_{\theta JA}$	75	$^\circ\text{C/W}$

<b>ORDERING INFORMATION</b> (Example)				
PREFERRED P/N	UNIT WEIGHT (g)	PREFERRED PACKAGE CODE	BASE QUANTITY	DELIVERY MODE
P6KE6.8A-E3/54	0.432	54	4000	13" diameter paper tape and reel
P6KE6.8AHE3/54 <sup>(1)</sup>	0.432	54	4000	13" diameter paper tape and reel

**Note:**

- (1) Automotive grade AEC-Q101 qualified

### RATINGS AND CHARACTERISTICS CURVES

( $T_A = 25\text{ }^\circ\text{C}$  unless otherwise noted)

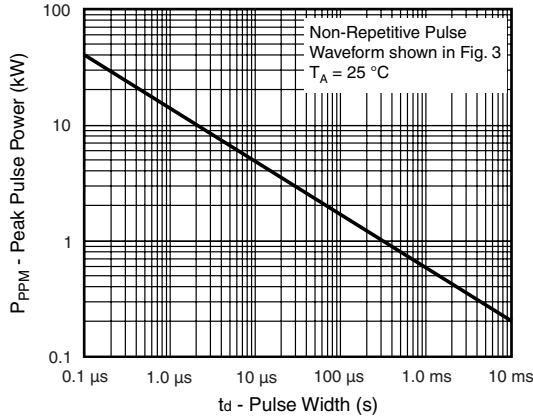


Figure 1. Peak Pulse Power Rating Curve

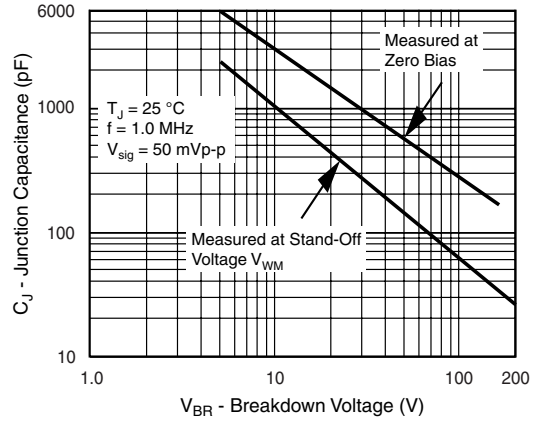


Figure 4. Typical Junction Capacitance Uni-Directional

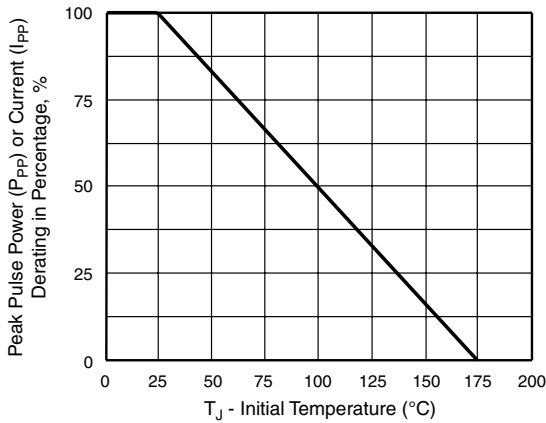


Figure 2. Pulse Power or Current vs. Initial Junction Temperature

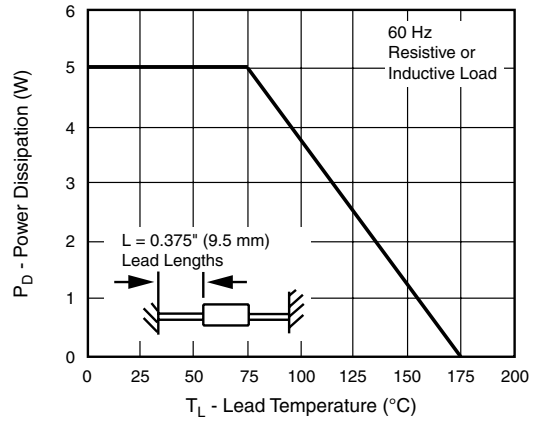


Figure 5. Power Derating Curve

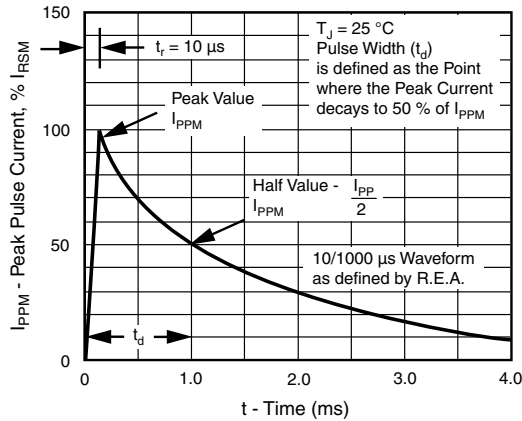


Figure 3. Pulse Waveform

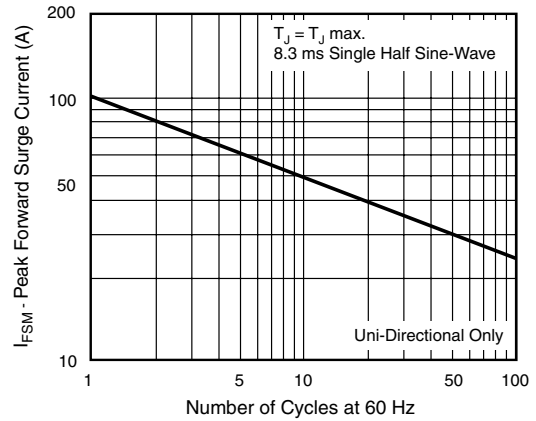


Figure 6. Maximum Non-Repetitive Forward Surge Current


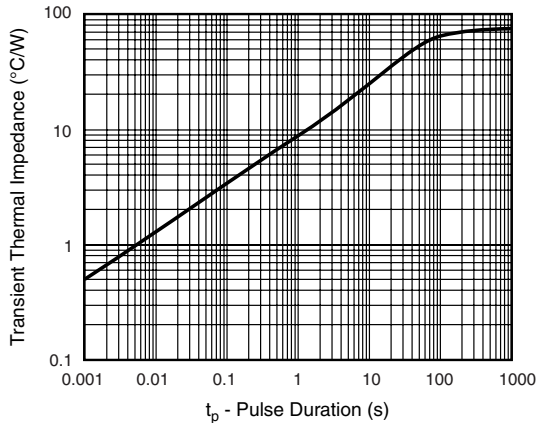


Figure 7. Typical Transient Thermal Impedance

### PACKAGE OUTLINE DIMENSIONS in inches (millimeters)

#### DO-204AC (DO-15)

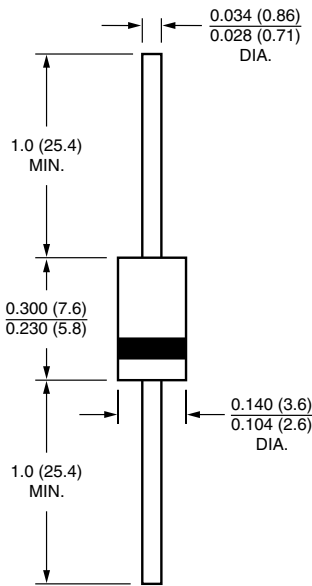

### APPLICATION NOTE

This P6KE TVS series is a low cost commercial product for use in applications where large voltage transients can permanently damage voltage-sensitive components.

The P6KE series device types are designed in a small package size where power and space is a consideration. They are characterized by their high surge capability, extremely fast response time, and low impedance, ( $R_{on}$ ). Because of the unpredictable nature of transients, and the variation of the impedance with respect to these transients, impedance, per se, is not specified as a parametric value. However, a minimum voltage at low current conditions ( $BV$ ) and a maximum clamping voltage ( $V_C$ ) at a maximum peak pulse current is specified.

In some instances, the thermal effect (see  $V_C$  Clamping Voltage) may be responsible for 50 % to 70 % of the observed voltage differential when subjected to high current pulses for several duty cycles, thus making a maximum impedance specification insignificant.

In case of a severe current overload or abnormal transient beyond the maximum ratings, the Transient Voltage Suppressor will initially fail 'short' thus tripping the system's circuit breaker or fuse while protecting the entire circuit. Curves depicting clamping voltage vs. various current pulses are available from the factory. Extended power curves vs. pulse time are also available.



## Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and/or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk and agree to fully indemnify and hold Vishay and its distributors harmless from and against any and all claims, liabilities, expenses and damages arising or resulting in connection with such use or sale, including attorneys fees, even if such claim alleges that Vishay or its distributor was negligent regarding the design or manufacture of the part. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.