

Number of contacts

9–50



IP 67, turned solder cups

D-Sub

Identification	No. of contacts	Part No.
		S4 ¹⁾
Male connector metal shell with dimples	9 15 25 37 50	09 67 409 5615 09 67 415 5615 09 67 425 5615 09 67 437 5615 09 67 450 5615
Female connector metal shell	9 15 25 37 50	09 67 409 4715 09 67 415 4715 09 67 425 4715 09 67 437 4715 09 67 450 4715

¹⁾ S4: ≥ 0.76 µm Au (30 µinch)

Number of contacts

9–50



IP 67, turned solder cups


Identification

Drawing

Dimensions in mm


Male connector

9 – 50 contacts

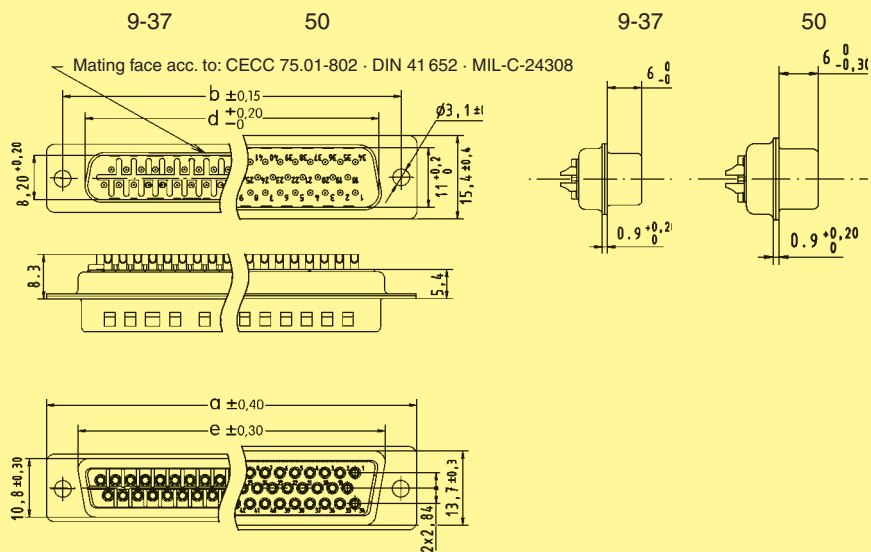

Female connector

9 – 50 contacts

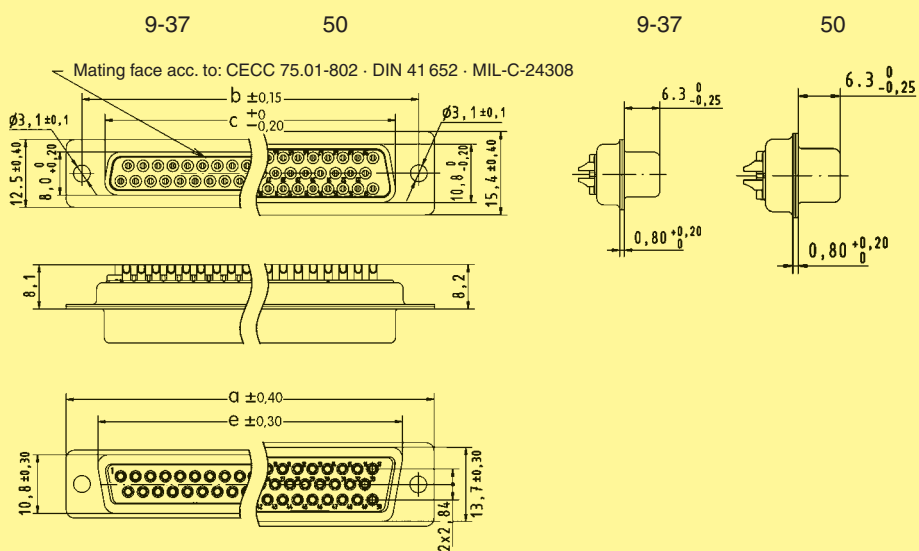

	a	b	c	d	e
9	30.8	25.00	16.4	16.9	19.3
15	39.1	33.30	24.7	25.2	27.5
25	53.0	47.04	38.5	38.9	41.3
37	69.3	63.50	54.9	55.3	57.7
50	66.9	61.10	52.5	52.8	55.3