

# HCMOS 5x3.2mm 2.5V SMD Oscillator



Model: F540L SERIES

RoHS Compliant / Pb Free

Rev. 5/7/2009

Page 1 of 2

[http://www.foxonline.com/need\\_a\\_sample.htm](http://www.foxonline.com/need_a_sample.htm)



## FEATURES

- 2.5V Operation
- HCMOS Output
- Standby Function
- Low Power Consumption
- Tape and Reel (1,000 pcs. STD)

XpressO® Equivalent  
FXO-HC52

Why XpressO?  
Lower Cost, Faster Delivery, Low Jitter!

• PART NUMBER SELECTION <a href="#">Learn More</a> - Internet Required				
Part Number	Model Number	Frequency Stability <sup>1</sup>	Operating Temperature (°C)	Frequency Range (MHz)
558-Frequency-xxxxx	F540L	±100PPM	-10 ~ +70	1.800 ~ 50.000
559-Frequency-xxxxx	F540LR	±100PPM	-40 ~ +85	1.800 ~ 50.000
560-Frequency-xxxxx	F545L	±50PPM	-10 ~ +70	1.800 ~ 50.000
561-Frequency-xxxxx	F545LR	±50PPM	-40 ~ +85	1.800 ~ 50.000
562-Frequency-xxxxx	F546L	±25PPM	-10 ~ +70	1.800 ~ 50.000
563-Frequency-xxxxx	F546LR	±25PPM*	-40 ~ +85	1.800 ~ 50.000
564-Frequency-xxxxx	F548L	±20PPM*	-10 ~ +70	1.800 ~ 50.000

• ELECTRICAL CHARACTERISTICS	
PARAMETERS	MAX (unless otherwise noted)
Frequency Range (Fo)	1.800 ~ 50.000 MHz
Storage Temperature Range (T <sub>STG</sub> )	-55°C ~ +125°C
Supply Voltage (V <sub>DD</sub> )	2.5V ± 5%
Input Current (I <sub>DD</sub> )	
1.800 ~ 32.000 MHz	10mA
32.000+ ~ 50.000 MHz	12mA
Output Symmetry (50% V <sub>DD</sub> )	45% ~ 55%
Rise Time (10% ~ 90% V <sub>DD</sub> ) (T <sub>R</sub> )	5nS
Fall Time (90% ~ 10% V <sub>DD</sub> ) (T <sub>F</sub> )	5nS
Output Voltage (V <sub>OL</sub> )	10% V <sub>DD</sub>
(V <sub>OH</sub> )	90% V <sub>DD</sub> Min
Output Current (I <sub>OL</sub> )	4mA Min
(I <sub>OH</sub> )	4mA Min
Output Load (HCMOS)	15pF
Standby Current	10µa
Start-up Time (T <sub>s</sub> )	10mS
Output Disable Time <sup>2</sup>	150nS
Output Enable Time <sup>2</sup>	10mS


<sup>1</sup> Inclusive of 25°C tolerance, operating temperature range, input voltage change, load change, aging, shock, and vibration. \*Excludes Shock/Vibration

<sup>2</sup> An internal pullup resistor from pin 1 to pin 4 allows active output if pin 1 is left open.

Drawing is for reference to critical specifications defined by size measurements.

Note: A 0.01µF capacitor should be placed between V<sub>DD</sub> (Pin 4) and GND (Pin2) to minimize power supply noise.

Certain non-critical visual attributes, such as side castellations, reference pin shape, etc. may vary. All specifications subject to change without notice.

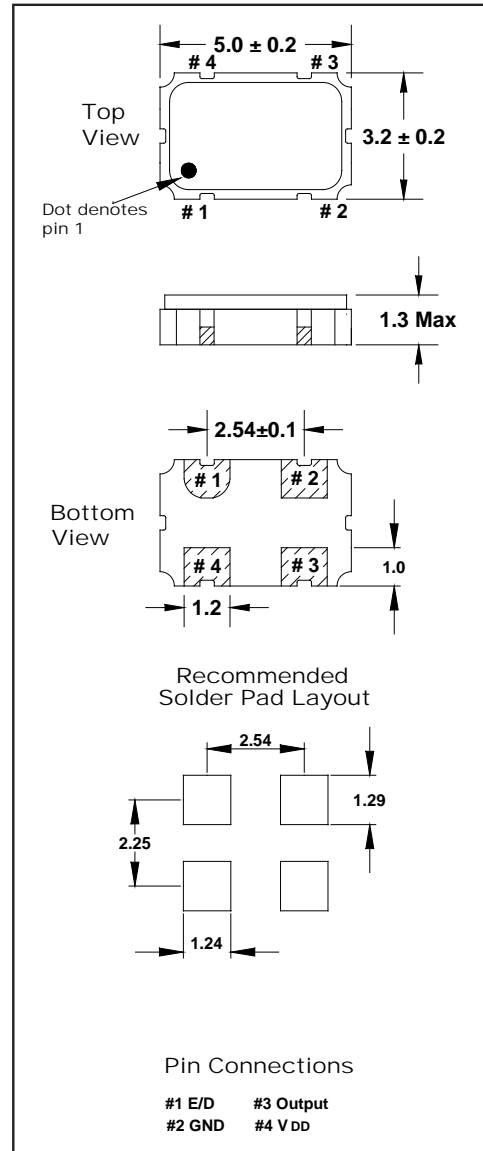

• ENABLE / DISABLE FUNCTION	
INH (Pin 1)	OUTPUT (Pin 3)
OPEN <sup>2</sup>	ACTIVE
'1' Level V <sub>IH</sub> ≥ 70% V <sub>DD</sub>	ACTIVE
'0' Level V <sub>IL</sub> ≤ 30% V <sub>DD</sub>	High Z

# HCMOS 5x3.2mm 2.5V SMD Oscillator



Model: F540L SERIES

RoHS Compliant / Pb Free

Rev. 5/7/2009

Page 2 of 2

[http://www.foxonline.com/need\\_a\\_sample.htm](http://www.foxonline.com/need_a_sample.htm)



• TAPE SPECIFICATIONS (millimeters)							
MODEL	A	B	C	D	E	F	STD Reel QTY
F540L Series	Ø1.5	4.0	8.0	5.5	12.0	1.5	1,000

• REEL SPECIFICATIONS (millimeters)							
MODEL	G	H	I	J	K	L	M
F540L Series	2.0	Ø13	Ø21	Ø62	Ø180	13.5	2.0

