



*GWLX/GWLX-SMT Series
Right Angle Modular Jack with LED, Tab up*

Features



- Easy Viewing LEDs to act as Power/Transmit Indicators
- Snap-In Retention Tabs
- Available Fully Shielded for EMI/RFI Protection
- CSA/NRTL Certified File No. LR78160

Performance Specifications

Materials and Finish

Housing Material

High Temperature Thermoplastic

Shield Material

Copper Alloy, Nickel Plated

Contact Material

Phosphor Bronze

Electrical Characteristics

Insulation Resistance

500 Megohms min.

Dielectric Withstanding Voltage

1000V AC for 1 Minute

Contact Resistance

20 milliohms max.

Current Rating

1.5 Amps


MODULAR JACKS & PLUGS

GWLX / GWLX-SMT Series

Documentation & Ordering Information

Kycon Part #	
---------------------	--

Part Number Builder

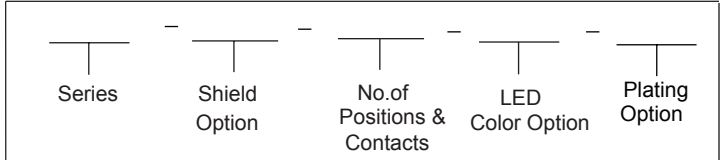

Series

GWLX - Modular Jack with LED, Tab up
GWLX-SMT - SMT Modular Jack with LED, Tab up

Shield Option and Ground Pin Spacing

Shield Option	Led Color					
	G/G	G/Y	G/R	Y/G	GY/GY	YG/YG
N Non-Shielded	-	88	-	-	-	-
S Fully Shielded	88	88	88	-	-	-
S2 Fully Shielded w/Side Ground Tabs	-	88	-	-	-	-
S9 Fully Shielded With Top & Side Tabs	88	88	88	88		

LED Color*

G/G - Left: Green, Right: Green
Y/Y - Left: Yellow, Right: Yellow
Y/G - Left: Yellow, Right: Green
G/Y - Left: Green, Right: Yellow
G/R - Left: Green, Right: Red
GY/GY - Left: Green/Yellow, Right: Green/Yellow

Plating Option

Blank - Gold Flash
15 - 15µ" Gold Plating
30 - 30µ" Gold Plating
50 - 50µ" Gold Plating

* Contact Factory for other LED Options