


INTRODUCTION

The KS16116-02 and KS16117-02 are synchronous, half-duplex modems capable of speeds up to 9600 bps (KS16116-02) or up to 14400 bps (KS16117-02). These modem devices can operate over the public switched telephone network (PSTN) with the addition of the appropriate data access arrangement (DAA).

These modems satisfy the requirements specified in ITU-T recommendations V.17 (KS16117-02), V.29, V.27 ter, V.21 Channel 2 and T.4, and meet the binary signaling requirements of T.30. These products are intended to be used in Group 3 facsimile machines or fax processing boards and can operate at 14400 (KS16117-02), 12000 (KS16117-02), 9600, 7200, 4800, 2400 or 300 bps depending on the selected configuration. These devices also feature V.17 short train (KS16117-02) and V.27 ter short train and three programmable tone detectors as well as a programmable DTMF receiver. Additionally, HDLC framing (according to T.30) at 14400 (KS16117-02), 12000 (KS16117-02), 9600, 7200, 4800, 2400 or 300 bps is also featured. General purpose input/output and general purpose input (GPI) pins are available for host assignment.

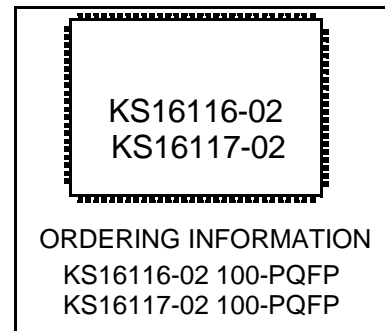


Features

- Group 3 facsimile transmission/reception according to:
 - ITU-T V.17 short and long train (KS16117-02)
 - ITU-T V.29, V.27 ter short and long train, V.21 Ch.2, T.30, and T.4
- Caller ID reception and detection
- Half-duplex operation
- Receiver dynamic range: 0 dBm to - 43 dBm
- Programmable transmit level: 0 dBm to - 15 dBm
- Programmable transmit attenuation: 0 dB to 14 dB in 2 dB steps
- Programmable dual tone generation
- Programmable tone detection
- Programmable interface memory interrupt
- Programmable turn on and turn off thresholds
- Automatic T/2 adaptive equalizer
- HDLC capability at all speeds
- Diagnostic capability allowing telephone line quality monitoring
- ITU-T V.24 compatible interface
- TTL and CMOS compatible
- Low power consumption, KS16116-02: 250mW (typical), KS16117-02: 400mW (typical)
- Single +5V power supply
- Software compatible with KS16116-02 (KS16112) and KS16117-02 (KS16114)
- Programmable compromise filter for high speed RX modes

Block Diagram

The KS16116-02 and KS16117-02 consists of Digital Signal Processor, Analog Front End, and some peripheral logics. Figure 1.1 shows a block diagram of the KS16116-02 and KS16117-02.

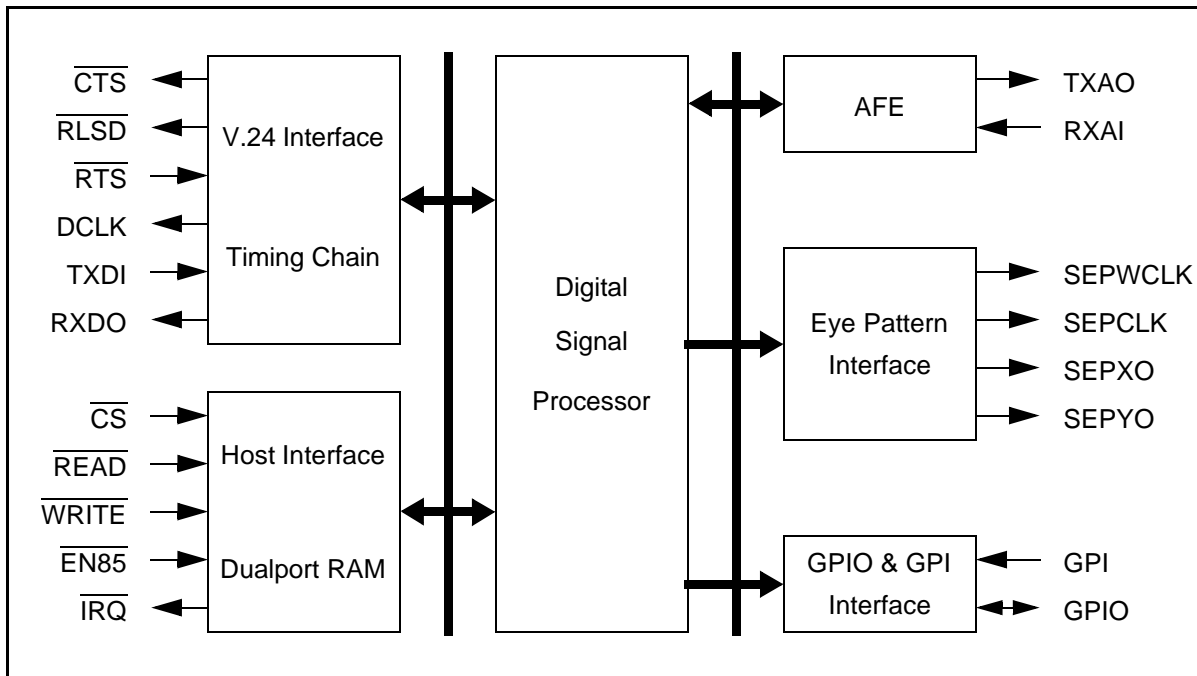

Pin Configuration

