


M402V Connectors

Female SMT Connectors

A range of 0.5mm pitch SMT female double row connectors with a wide range of board to board stacking heights.



- ❖ Supplied in Tape & Reel packaging.
- ❖ Locating pegs to ensure correct positioning onto board.
- ❖ SMT metal solder-down tabs for additional strain relief.

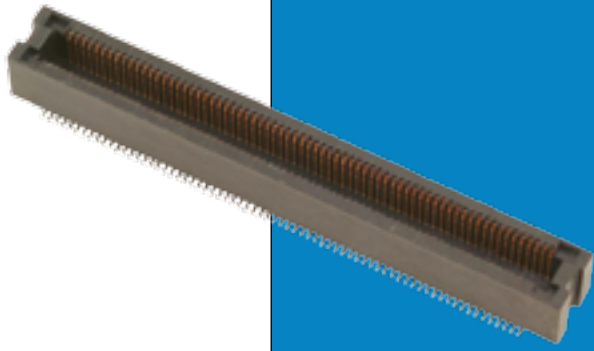

FEMALE

CALCULATION

A	$B + 5.00$
B	$0.25 \times (\text{Total no. of contacts} - 2)$
C	$B + 2.50$

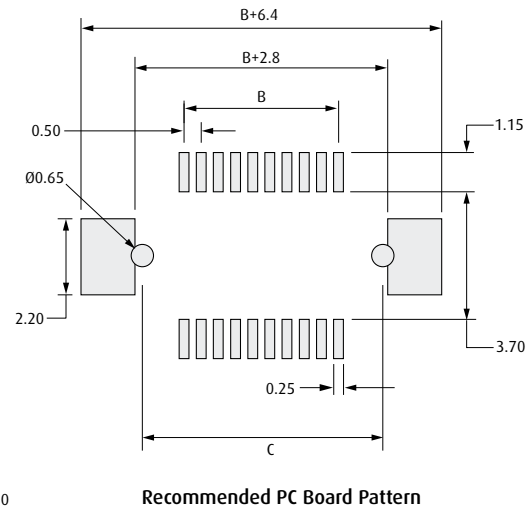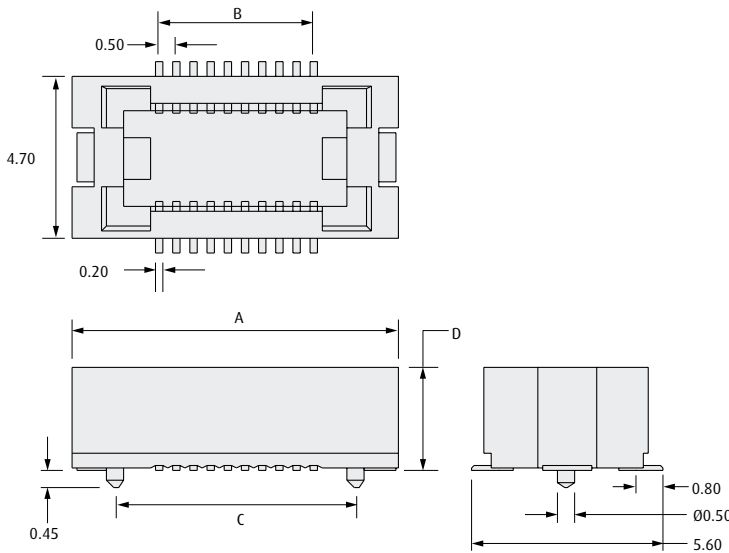

HOW TO ORDER

M402VF-3- XXX - XXN R

SERIES CODE

TAPE & REEL

TOTAL NUMBER OF CONTACTS

010 to 100, 110, 120, 130, 140, 150, 160

Even numbers only

CONNECTOR HEIGHT

01N	D = 1.50mm	05N	D = 4.00mm	09N	D = 8.00mm
02N	D = 2.00mm	06N	D = 5.00mm	0AN	D = 9.00mm
03N	D = 2.50mm	07N	D = 6.00mm	0BN	D = 10.00mm
04N	D = 3.00mm	08N	D = 7.00mm		

www.harwin.com

All dimensions in mm.



HARWIN

0.50mm (.020") PITCH