


REV. A

DIMENSIONS ARE IN INCHES		UNLESS OTHERWISE NOTED	TOLERANCES ARE:	TITLE:	DWG NO:
ONE PLACE DECIMALS ± .1[.25]	THREE PLACE DECIMALS ± .005[.127]	ANGLES ± 2°		2MM SOCKET STRIP ASSEMBLY	MPS2-1XX-XX-X-X-XXX-XXX
TWO PLACE DECIMALS ± .01[.25]	FOUR PLACE DECIMALS ± .0020[.051]				SHEET 1 OF 2

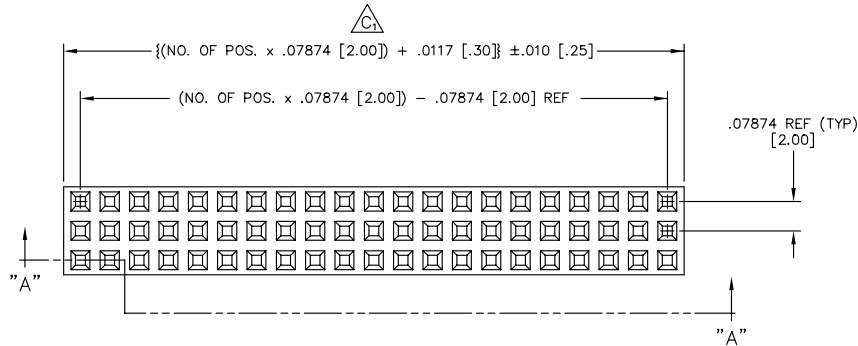

MPS2-1XX-XX-X-X-XXX-XXX

POSITION SPECIFICATION  
-02 THRU -50 (PER ROW)

LEAD STYLE SPEC  
-01: .090 [2.29] TAIL

PLATING SPECIFICATION  
-F: FLASH SELECTIVE GOLD (USE C-97-01-F)  
-L: LIGHT SELECTIVE GOLD (USE C-97-01-L)  
-S: SELECTIVE GOLD (USE C-97-01-S)

OPTION  
\* -MW: METAL WASHER (SEE FIG. 3)

POLARIZATION OPTION  
-XXX INDICATES POSITION (USE PK-07- SEE FIG. 2)

ROW SPECIFICATION  
-T: TRIPLE (USE SQW-XX-T)

\* = NOT ENGINEERING APPROVED


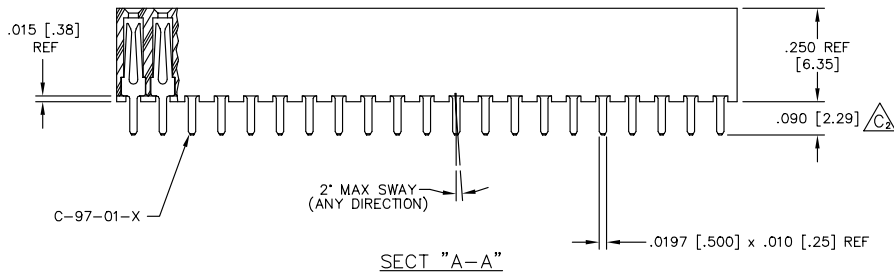


FIG. 2  
POLARIZATION OPTION LOCATION  
INSERT PK-07 INTO SPECIFIED POSITION AND BREAK OFF TAB

NOTE:  
1. MINIMUM CONTACT RETENTION: 0.5 LB PER PIN.




FIG. 1

No OF POS	PKG TUBE	TUBE PLUG
-15 THRU -50	PT-1-24-06-15	TP-03
-02 THRU -14	LAYER PACKAGING	

NOTES

1. CONTACT PUSHOUT FORCE: 1.5 lbs. MIN.
2. MAX ALLOWABLE BOW: .003 INCH/INCH.
3. MAX ALLOWABLE VARIATION BETWEEN PIN ROWS: .010
4. (  $\triangle$  ) REPRESENTS CRITICAL DIMENSION.
5. MAX CUT FLASH: .005 [.13].

DO NOT SCALE FROM THIS PRINT

**PROPRIETARY NOTE**  
THIS DOCUMENT CONTAINS INFORMATION CONFIDENTIAL AND PROPRIETARY TO SAMTEC INC. AND SHALL NOT BE REPRODUCED OR TRANSFERRED TO OTHER DOCUMENTS OR DISCLOSED TO OTHERS OR USED FOR ANY PURPOSE OTHER THAN THAT FOR WHICH IT WAS OBTAINED WITHOUT THE EXPRESSED WRITTEN CONSENT OF SAMTEC INC.

PLOT SCALE: 1=.2

**samtec**

MISC\MKTG  
MPS2-MKT

810 PROGRESS BLVD. NEW ALBANY, INDIANA 47150  
PHONE (812) 944-6733 P.O. BOX 1147  
CODE 55322

MADE BY: M. CARTER 7-30-98

MPS2-1XX-XX-X-X-XXX-XXX  
SHEET 1 OF 2