

- **Designed to AMPS, CDMA, TDMA Selectivity in 881.50 MHz**
- **Low-Loss, Coupled-Resonator Quartz Design**
- **Simple External Impedance Matching**
- **Ultra Miniature Ceramic DCC6C SMD Package**

SF5906

Absolute Maximum Rating (Ta=25°C)			
Parameter		Rating	Unit
Input Power Level	P_{in}	10	dBm
DC Voltage VDC Between Any Two Pins	V_{dc}	12	V
Operating Temperature Range	T_A	-30 ~ +80	°C
Storage Temperature Range	T_{stg}	-40 ~ +85	°C


Electronic Characteristics						
Parameter		Sym	Minimum	Typical	Maximum	Unit
Nominal Frequency (at 25°C) (Center frequency between 3dB point)		f_c	NS	881.50	NS	MHz
Insertion Loss	869.00 ... 894.00 MHz	IL	-	2.7	3.5	dB
3dB Passband		BW_3	-	±17.6	-	MHz
Usable Bandwidth		BW	-	±12.5	-	MHz
Amplitude Ripple	869.00 ... 894.00 MHz	$\Delta\alpha$	-	0.8	1.5	dB
Absolute Attenuation						
	10.00 ... 779.00 MHz		45	50	-	dB
	779.00 ... 849.00 MHz	α_{rel}	40	45	-	dB
	914.00 ... 970.00 MHz		20	28	-	dB
	970.00 ... 1049.0 MHz		40	55	-	dB
	1049.0 ... 2000.0 MHz		45	50	-	dB
Frequency Aging	Absolute Value during the First Year	$ f_A $	-	-	10	ppm/yr
DC Insulation Resistance Between any Two Pins		-	1.0	-	-	MΩ
Input / Output Impedance (nominal)		-	-	50	-	Ω

NS = Not Specified

Notes:

- The frequency f_c is defined as the midpoint between the 3dB frequencies.
- Unless noted otherwise, all measurements are made with the filter installed in the specified test fixture that is connected to a 50Ω test system with VSWR ≤ 1.2:1. The test fixture L and C are adjusted for minimum insertion loss at the filter center frequency, f_c . Note that insertion loss, bandwidth, and passband shape are dependent on the impedance matching component values and quality.
- Unless noted otherwise, specifications apply over the entire specified operating temperature range.
- The specifications of this device are based on the test circuit shown above and subject to change or obsolescence without notice.
- All equipment designs utilizing this product must be approved by the appropriate government agency prior to manufacture or sale.
- Our liability is only assumed for the Surface Acoustic Wave (SAW) component(s) per se, not for applications, processes and circuits implemented within components or assemblies.
- For questions on technology, prices and delivery please contact our sales offices or e-mail sales@vanlong.com.

Package Dimensions (DCC6C)

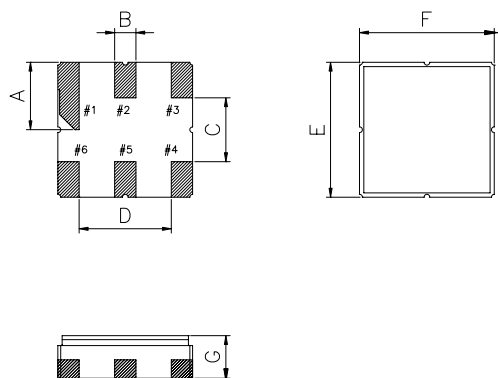

Electrical Connections

Terminals	Connection
2	Input
5	Output
1,3,4,6	Case Ground

Package Dimensions


Dimensions	Nom (mm)	Dimensions	Nom (mm)
A	1.5	E	3.0
B	0.6	F	3.0
C	1.5	G	1.1
D	1.8		

Marking



1. F5906 - Part Code
2. Frequency (MHz) in 5 digits
3. Date Code:
Y : Last digit of year
WW : Week No.

Test Circuit

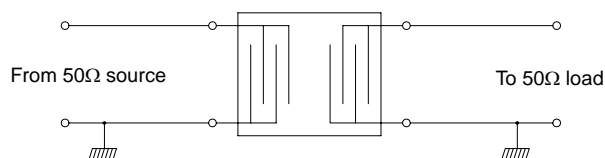

Typical Frequency Response

