

Self-insulated with high dielectric-strength nylon sleeves, these ring terminals are recommended for temperatures up to 105°C. An inner bronze insulation grip sleeve lengthens the flexing radius of the conductor and eliminates conductor creep. The nylon jacket is color-coded:

Color Code	Wire Range
yellow	26-22
red	22-16
blue	18-14
yellow	12-10

Most standard bulk catalog numbers can be put on Mylar Tape for reel fed applications (i.e. 12050 tool and application dies). Please consult tech service.

Please put the suffix M for Mylar Tape RA2573M.

(Bulk number 1000 and 500 packages.)

RZ & RAX stock thickness: .02
 RA & RB stock thickness: .03
 RC stock thickness: .04

Nylon Insulated Ring—Insulation Grip



Cat. No.	Pkg. Qty.	Wire Range	Max. Ins.	Bolt Hole	Wt./Lbs. Per 1000	Dimensions			
						A	B	C	M
RZ22-2**	100	26-22	.083	#2	1	.57	.14	.13	.49
RZ22-4**	100	26-22	.083	#4	1	.65	.21	.20	.54
RZ22-6**	100	26-22	.083	#6	1	.65	.21	.20	.54
RZ22-8**	100	26-22	.083	#8	1	.75	.25	.23	.62
RZ22-10**	100	26-22	.083	#10	1	.75	.25	.23	.62
RAX23*	1000	26-24	.125	#2	3	.66	.14	.14	.59
RAX43*	1000	26-24	.125	#4	3	.74	.20	.19	.64
RAX63*	1000	26-24	.125	#6	3	.84	.25	.22	.72
RAX83*	1000	26-24	.125	#8	3	.84	.25	.22	.72
RAX103*	1000	26-24	.125	#10	3	.84	.25	.24	.72
RA18-4	100	22-16	.136	#4	2	.70	.23	.14	.59
RA323	1000	22-16	.136	#4	2	.70	.23	.14	.59
RA333	1000	22-16	.136	#6	2	.70	.23	.14	.59
RA18-6	100	22-16	.136	#6	2	.83	.26	.25	.71
RA853	1000	22-16	.136	#6	2	.83	.26	.25	.71
RA18-8	100	22-16	.136	#8	3	.83	.26	.25	.71
RA833	1000	22-16	.136	#8	3	.83	.26	.25	.71
RA863	1000	22-16	.136	#8	3	.83	.26	.25	.71
RA18-10	100	22-16	.136	#10	2	.86	.31	.25	.71
RA873	1000	22-16	.136	#10	2	.86	.31	.25	.71
RA18-14	100	22-16	.136	¼"	3	1.07	.46	.31	.84
RA713	1000	22-16	.136	¼"	3	1.07	.46	.31	.84
RA18-516	100	22-16	.136	⅜"	3	1.07	.46	.31	.84
RA723	1000	22-16	.136	⅜"	3	1.07	.46	.31	.84
RA18-38	100	22-16	.136	⅝"	3	1.17	.53	.35	.87
RA733	1000	22-16	.136	⅝"	3	1.17	.53	.35	.87
RA18-12	100	22-16	.136	½"	3	1.27	.72	.50	.92
RA753	1000	22-16	.136	½"	3	1.27	.72	.50	.92
RB14-4	100	18-14	.162	#4	2½	.72	.26	.14	.59
RB1323	1000	18-14	.162	#4	2½	.72	.26	.14	.59
RB14-6	100	18-14	.162	#6	3	.89	.31	.25	.71
RB853	1000	18-14	.162	#6	3	.89	.31	.25	.71
RB1333	1000	18-14	.162	#6	3	.74	.26	.14	.59
RB14-8	100	18-14	.162	#8	3	.89	.31	.25	.71
RB863	1000	18-14	.162	#8	3	.89	.31	.25	.71
RB14-10	100	18-14	.162	#10	3½	.89	.31	.25	.71
RB873	1000	18-14	.162	#10	3½	.89	.31	.25	.71
RB14-14	100	18-14	.162	¼"	3½	1.08	.47	.31	.81
RB713	1000	18-14	.162	¼"	3½	1.08	.47	.31	.81
RB14-516	100	18-14	.162	⅜"	3½	1.08	.47	.31	.84
RB723	1000	18-14	.162	⅜"	3½	1.08	.47	.31	.84
RB14-38	100	18-14	.162	⅝"	3½	1.17	.53	.35	.87
RB733	1000	18-14	.162	⅝"	3½	1.17	.53	.35	.87
RB14-12	100	18-14	.162	½"	4	1.25	.72	.50	.90
RB753	1000	18-14	.162	½"	4	1.25	.72	.50	.90
RC10-6	50	12-10	.210	#6	3	1.00	.37	.27	.81
RC333	500	12-10	.210	#6	3	1.00	.37	.27	.81
RC10-8	50	12-10	.210	#8	5	1.00	.37	.27	.81
RC863	500	12-10	.210	#8	5	1.00	.37	.27	.81
RC10-10	50	12-10	.210	#10	5	1.00	.37	.27	.81
RC363	500	12-10	.210	#10	5	1.00	.37	.27	.81
RC10-14	50	12-10	.210	¼"	6	1.12	.53	.32	.86
RC713	500	12-10	.210	¼"	6	1.12	.53	.32	.86
RC10-516	50	12-10	.210	⅜"	6	1.21	.53	.31	.94
RC703	500	12-10	.210	⅜"	6	1.21	.53	.31	.94
RC10-38	50	12-10	.210	⅝"	6	1.27	.59	.35	.98
RC733	500	12-10	.210	⅝"	6	1.27	.59	.35	.98
RC10-12	50	12-10	.210	½"	6	1.37	.72	.52	1.02
RC753	500	12-10	.210	½"	6	1.37	.72	.52	1.02


* Not Listed By U.L. CSA

** CSA Listed only

U.L. Listed E9809

Installing tools: WT2000, WT112M, WT145C, WT1455, ERG-2001, ERG-2003, WT145A, WT2130A (RC,RBC)

Installing tool: WT1452 (RZ series only)



Catalog numbers with the suffix X indicate an expanded insulation grip. This means a wider wire entry to accommodate heavy wall insulation. Ring terminals won't fall free even if the mounting screw loosens.

RB stock thickness: .03

RC stock thickness: .04

Nylon Insulated Ring—Expanded Insulation Grip


Cat. No.	Pkg. Qty.	Wire Range	Max. Ins.	Bolt Hole	Wt./Lbs. Per 1000	Dimensions			
						A	B	C	M
RB14-4X	100	18-14	.190	#4	4	.80	.26	.14	.67
RB1324	1000	18-14	.190	#4	4	.80	.26	.14	.67
RB14-6X	100	18-14	.190	#6	4	.95	.31	.25	.79
RB854	1000	18-14	.190	#6	4	.95	.31	.25	.79
RB14-8X	100	18-14	.190	#8	5	.95	.31	.25	.79
RB864	1000	18-14	.190	#8	5	.95	.31	.25	.79
RB14-10X	100	18-14	.190	#10	5	.95	.31	.25	.79
RB874	1000	18-14	.190	#10	5	.95	.31	.25	.79
RB14-14X	100	18-14	.190	¼"	6	1.16	.47	.31	.92
RB714	1000	18-14	.190	¼"	6	1.16	.47	.31	.92
RB14-516X	100	18-14	.190	⅝"	6	1.16	.47	.31	.92
RB724	1000	18-14	.190	⅝"	6	1.16	.47	.31	.92
RB14-38X	100	18-14	.190	⅝"	6	1.25	.53	.42	.95
RB734	1000	18-14	.190	⅝"	6	1.25	.53	.42	.95
RC10-6X	50	12-10	.250	#6	5	1.10	.37	.27	.91
RC334	500	12-10	.250	#6	5	1.10	.37	.27	.91
RC10-8X	50	12-10	.250	#8	5	1.10	.37	.27	.91
RC864	500	12-10	.250	#8	5	1.10	.37	.27	.91
RC10-10X	50	12-10	.250	#10	5	1.10	.37	.27	.91
RC364	500	12-10	.250	#10	5	1.10	.37	.27	.91
RC10-14X	50	12-10	.250	¼"	6	1.22	.53	.32	.96
RC714	500	12-10	.250	¼"	6	1.22	.53	.32	.96
RC10-516X	50	12-10	.250	⅝"	6	1.32	.53	.31	1.05
RC704	500	12-10	.250	⅝"	6	1.32	.53	.31	1.05
RC10-38X	50	12-10	.250	⅝"	6	1.38	.59	.35	1.09
RC734	500	12-10	.250	⅝"	6	1.38	.59	.35	1.09
RC10-12X	50	12-10	.250	½"	6	1.48	.72	.52	1.13

U.L. Listed E9809

Installing tools: WT2000, WT112M, WT145C, ERG-2001, ERG-2003, WT145A, WT1455, WT2130A(RC)

Most standard bulk catalog numbers can be put on Mylar Tape for reel fed applications (i.e. 12050 tool and application dies).

Please put the suffix M for Mylar Tape RA2573M. (Bulk number 1000 and 500 packages.)



RD, RE, RF stock thickness: .04

RG stock thickness: .05

Nylon Insulated Ring

Cat. No.	Pkg. Qty.	Wire Range	Max. Ins.	Bolt Hole	Wt./Lbs. Per 1000	Dimensions			
						A	B	C	M
RD8-10	25	9-8-7	.340	#10	12	1.48	.42	.28	1.29
RD367	200	9-8-7	.340	#10	12	1.48	.42	.28	1.29
RD8-14	25	9-8-7	.340	1/4"	12	1.54	.46	.36	1.32
RD717	200	9-8-7	.340	1/4"	12	1.54	.46	.36	1.32
RD8-516	25	9-8-7	.340	5/16"	12	1.63	.57	.36	1.35
RD727	200	9-8-7	.340	5/16"	12	1.63	.57	.36	1.35
RD8-38	25	9-8-7	.340	3/8"	12	1.63	.57	.36	1.35
RD737	200	9-8-7	.340	3/8"	12	1.63	.57	.36	1.35
RD8-12	25	9-8-7	.310	1/2"	12	1.79	.82	.55	1.39
RD757*	200	9-8-7	.310	1/2"	12	1.79	.82	.55	1.39
RD10161	200	9-8-7AN	.270	#8	12	1.40	.41	.24	1.20
RD10361	200	9-8-7AN	.270	#10	12	1.40	.41	.24	1.20
RD10711	200	9-8-7AN	.270	1/4"	12	1.45	.45	.27	1.22
RD10721	200	9-8-7AN	.270	5/16"	12	1.53	.56	.34	1.25
RD10731	200	9-8-7AN	.270	3/8"	12	1.53	.56	.34	1.25
RE6-10	20	6-5	.420	#10	16	1.65	.49	.28	1.40
RE267	200	6-5	.420	#10	16	1.65	.49	.28	1.40
RE6-14	20	6-5	.420	1/4"	16	1.65	.49	.28	1.40
RE717	200	6-5	.420	1/4"	16	1.65	.49	.28	1.40
RE6-516	20	6-5	.420	5/16"	16	1.76	.61	.34	1.47
RE727	200	6-5	.420	5/16"	16	1.76	.61	.34	1.47
RE6-38	20	6-5	.420	3/8"	16	1.76	.61	.34	1.47
RE737	200	6-5	.420	3/8"	16	1.76	.61	.34	1.47
RE6-12	20	6-5	.395	1/2"	16	1.83	.82	.55	1.43
RE757*	200	6-5	.395	1/2"	16	1.83	.82	.55	1.43
RE10261	200	6-5AN	.315	#10	16	1.55	.49	.24	1.31
RE10711	200	6-5AN	.315	1/4"	16	1.55	.49	.27	1.31
RE10721	200	6-5AN	.315	5/16"	16	1.70	.60	.34	1.40
RE10731	200	6-5AN	.315	3/8"	16	1.70	.60	.34	1.40
RF4-10	15	4-3	.510	#10	21	1.76	.56	.36	1.49
RF267	200	4-3	.510	#10	21	1.76	.56	.36	1.49
RF4-14	15	4-3	.510	1/4"	21	1.76	.56	.36	1.49
RF717	200	4-3	.510	1/4"	21	1.76	.56	.36	1.49
RF4-516	15	4-3	.510	5/16"	21	1.84	.62	.35	1.53
RF727	200	4-3	.510	5/16"	21	1.84	.62	.35	1.53
RF4-38	15	4-3	.510	3/8"	23	1.84	.62	.35	1.53
RF737	200	4-3	.510	3/8"	23	1.84	.62	.35	1.53
RF757*	200	4-3	.500	1/2"	23	1.90	.82	.55	1.49
RF10261	200	4-3AN	.380	#10	26	1.78	.55	.30	1.51
RF10711	200	4-3AN	.380	1/4"	26	1.78	.55	.30	1.51
RF10721	200	4-3AN	.380	5/16"	26	1.80	.62	.34	1.49
RF10731	200	4-3AN	.380	3/8"	26	1.80	.82	.34	1.49
RG2-10	10	2-1	.588	#10	42	2.15	.69	.40	1.83
RG267	100	2-1	.588	#10	42	2.15	.69	.40	1.83
RG2-14	10	2-1	.588	1/4"	42	2.15	.69	.40	1.83
RG717	100	2-1	.588	1/4"	42	2.15	.69	.40	1.83
RG2-516	10	2-1	.588	5/16"	42	2.15	.69	.40	1.83
RG727	100	2-1	.588	5/16"	42	2.15	.69	.40	1.83
RG2-38	10	2-1	.588	3/8"	42	2.15	.69	.40	1.83
RG737	100	2-1	.588	3/8"	42	2.15	.69	.40	1.83
RG2-12	10	2-1	.588	1/2"	42	2.35	.80	.49	1.93
RG757	100	2-1	.588	1/2"	42	2.35	.80	.49	1.93
RG9711	100	1AN	.453	1/4"	48	2.07	.69	.40	1.74
RG9731	100	1AN	.453	3/8"	48	2.07	.69	.40	1.74
RG9751	100	1AN	.453	1/2"	48	2.26	.80	.49	1.84




* Brazed Seam, Lolly-Pop Style Tongue

AN—Aircraft Wire
U.L. Listed E9809

Installing tools: TBM6/TBM6S, WT2130A (RD Series only)

Note: Not available on Mylar Tape.



Stock Thickness:

- RH = .05
- RJ = .06
- RK = .06
- RL = .07
- RM = .07

Nylon Insulated Ring—continued




Cat. No.	Pkg. Qty.	Wire Range	Max. Ins.	Bolt Hole	Wt./Lbs. Per 1000	Dimensions			
						A	B	C	M
RH9711	100	1AN	.500	¼"	54	2.14	.77	.44	1.81
RH9731	100	1AN	.500	⅜"	54	2.14	.77	.44	1.81
RH9751	100	1AN	.500	½"	54	2.34	.77	.54	1.90
RJ9711	100	1/0AN	.550	¼"	80	2.35	.83	.46	1.97
RJ9731	100	1/0AN	.550	⅜"	80	2.35	.83	.46	1.97
RJ9751	100	1/0AN	.550	½"	80	2.49	.89	.55	2.04
RH717	100	1/0	.629	¼"	80	2.14	.77	.43	1.81
RH727	100	1/0	.629	⅜"	80	2.14	.77	.43	1.81
RH737	100	1/0	.629	⅜"	80	2.14	.77	.43	1.81
RH757	100	1/0	.629	½"	80	2.34	.77	.54	1.90
RK9731	100	2/0AN	.610	⅜"	70	2.52	.93	.55	2.14
RK9751	100	2/0AN	.610	½"	70	2.60	.93	.55	2.15
RJ717	100	2/0	.675	¼"	80	2.34	.83	.46	1.96
RJ727	100	2/0	.675	⅜"	80	2.34	.83	.46	1.96
RJ737	100	2/0	.675	⅜"	80	2.34	.83	.46	1.96
RJ757	100	2/0	.675	½"	80	2.48	.89	.54	2.03
RL9731	100	3/0AN	.680	⅜"	120	2.83	1.04	.57	2.36
RL9751	100	3/0AN	.680	½"	120	2.83	1.04	.57	2.36
RK717	100	3/0	.765	¼"	84	2.60	.93	.54	2.21
RK727	100	3/0	.765	⅜"	84	2.60	.93	.54	2.21
RK737	100	3/0	.765	⅜"	84	2.60	.93	.54	2.21
RM9731	100	4/0AN	.750	⅜"	160	3.00	1.13	.66	2.51
RM9751	100	4/0AN	.750	½"	160	3.00	1.13	.66	2.51
RL737	100	4/0	.785	⅜"	130	2.83	1.04	.57	2.35
RL757	100	4/0	.785	½"	130	2.83	1.04	.57	2.35
RM737	100	250MCM	.868	⅜"	130	3.00	1.13	.65	2.51
RM747	100	250MCM	.868	⅞"	130	3.00	1.13	.65	2.51
RM757	100	250MCM	.868	½"	130	3.00	1.13	.65	2.51

AN—Aircraft Wire

U.L. Listed E9809

Installing tools: TBM6/TBM6S, WT2130A (RD Series only)

Note: Not available on Mylar Tape.




These ring terminals are self-insulated with heat shrinkable nylon and internally coated sealant. Upon completed installation, a fully sealed connection is achieved to protect the joint against the degrading effects of galvanic action, corrosion, and environmental exposure.

RAS & RBS stock thickness: .03
RCS stock thickness: .04

Heat Shrinkable Ring Terminals—Expanded Insulation Support

Cat. No.	Pkg. Qty.	Wire Range	Max. Ins.	Bolt Hole	Wt./Lbs. Per 1000	Dimensions			
						A	B	C	M
RAS18-6X	100	22-18	.170	#6	2	1.23	.25	.27	1.10
RAS18-8X	100	22-18	.170	#8	3	1.26	.31	.27	1.10
RAS18-10X	100	22-18	.170	#10	2	1.26	.31	.27	1.10
RBS14-6X	100	16-14	.200	#6	3	1.23	.25	.27	1.10
RBS14-8X	100	16-14	.200	#8	3	1.23	.25	.27	1.10
RBS14-10X	100	16-14	.200	#10	3½	1.26	.31	.27	1.10
RCS10-6X	50	12-10	.250	#6	3	1.34	.31	.27	1.15
RCS10-8X	50	12-10	.250	#8	5	1.34	.37	.27	1.15
RCS10-10X	50	12-10	.250	#10	5	1.34	.37	.27	1.15
RCS10-14X	50	12-10	.250	¼"	6	1.34	.49	.32	1.15

U.L. Listed E9809
 Installing tool: WT1255
 Note: Not available on Mylar Tape.



These ring terminals are self-insulated with a PVC insulation sleeve of extra length to give protection and relieve bending stress at wire's flex point. Brazed seam barrel is serrated to obtain high pull-out value. Terminal is made of high conductivity electrolytic copper, electro-tin plated. Insulation material is color-coded:

Color Code	Wire Range
red	22-16
blue	18-14
yellow	12-10

Stock Thickness:
 RA & RB = .03
 RC = .04

Vinyl Insulated Ring—Insulation Support


Cat. No.	Pkg. Qty.	Wire Range	Max. Ins.	Bolt Hole	Wt./Lbs. Per 1000	Dimensions			
						A	B	C	M
18RA-4	100	22-16	.150	#4	3	.97	.31	.27	.81
RA77	1000	22-16	.150	#4	3	.97	.31	.27	.81
18RA-6	100	22-16	.150	#6	3	.94	.25	.27	.81
RA857	1000	22-16	.150	#6	3	.94	.25	.27	.81
18RA-8	100	22-16	.150	#8	3	.97	.31	.27	.81
RA867	1000	22-16	.150	#8	3	.97	.31	.27	.81
18RA-10	100	22-16	.150	#10	3	.97	.31	.27	.81
RA877	1000	22-16	.150	#10	3	.97	.31	.27	.81
18RA-14	100	22-16	.150	1/4"	4	1.13	.50	.37	.88
RA717	1000	22-16	.150	1/4"	4	1.13	.50	.37	.88
18RA-516	100	22-16	.150	5/16"	4	1.13	.50	.37	.88
RA727	1000	22-16	.150	5/16"	4	1.13	.50	.37	.88
18RA-38	100	22-16	.150	3/8"	4	1.24	.54	.37	.91
RA737	1000	22-16	.150	3/8"	4	1.24	.54	.37	.91
14RB-4	100	18-14	.170	#4	3	.94	.25	.27	.81
RB1327	1000	18-14	.170	#4	3	.94	.25	.27	.81
14RB-6	100	18-14	.170	#6	3	.97	.31	.27	.81
RB857	1000	18-14	.170	#6	3	.97	.31	.27	.81
14RB-8	100	18-14	.170	#8	3	.97	.31	.27	.81
RB867	1000	18-14	.170	#8	3	.97	.31	.27	.81
14RB-10	100	18-14	.170	#10	3	.97	.31	.27	.81
RB877	1000	18-14	.170	#10	3	.97	.31	.27	.81
14RB-14	100	18-14	.170	1/4"	4	1.14	.50	.38	.89
RB717	1000	18-14	.170	1/4"	4	1.14	.50	.38	.89
14RB-516	100	18-14	.170	5/16"	4	1.15	.50	.38	.89
RB727	1000	18-14	.170	5/16"	4	1.15	.50	.38	.89
14RB-38	100	18-14	.170	3/8"	4	1.16	.54	.38	.91
RB-737	1000	18-14	.170	3/8"	4	1.16	.54	.38	.91
10RC-6	50	12-10	.210	#6	5	1.06	.31	.27	.90
RC337	500	12-10	.210	#6	5	1.06	.31	.27	.90
10RC-8	50	12-10	.210	#8	5	1.06	.31	.27	.90
RC777	500	12-10	.210	#8	5	1.06	.31	.27	.90
10RC-10	50	12-10	.210	#10	5	1.06	.31	.27	.90
RC367	500	12-10	.210	#10	5	1.06	.31	.27	.90
10RC-14	50	12-10	.210	1/4"	6	1.16	.50	.27	.90
RC717	500	12-10	.210	1/4"	6	1.16	.50	.27	.90
10RC-516	50	12-10	.210	5/16"	6	1.17	.50	.37	.92
RC707	500	12-10	.210	5/16"	6	1.17	.50	.37	.92
10RC-38	50	12-10	.210	3/8"	6	1.29	.59	.44	.99
RC737	500	12-10	.210	3/8"	6	1.29	.59	.44	.99

U.L. Listed E9809

Installing tools: WT145C, WT2000, WT112M, ERG-2001, ERG-2003, WT1455, WT2130A (RC, RBC)

Most standard bulk catalog numbers can be put on Mylar Tape for reel fed applications (i.e. 12050 tool and application dies).

Please put the suffix M for Mylar Tape RA2573M. (Bulk number 1000 and 500 packages.)



Catalog numbers with the suffix X indicate an expanded insulation support. This means a wider wire entry to accommodate heavy wall insulation. Ring terminals won't fall free even if the mounting screw loosens.

Stock Thickness:

RA & RB = 03
RC = .04

Vinyl Insulated Ring—Expanded Insulation Support




Cat. No.	Pkg. Qty.	Wire Range	Max. Ins.	Bolt Hole	Wt./Lbs. Per 1000	Dimensions			
						A	B	C	M
18RA-6X	100	22-16	.170	#6	3	.97	.31	.27	.81
18RA-8X	100	22-16	.170	#8	3	.97	.31	.27	.81
RA867-170	1000	22-16	.170	#8	3	.97	.31	.27	.81
18RA-10X	100	22-16	.170	#10	3	.97	.31	.27	.81
RA877-170	1000	22-16	.170	#10	3	.97	.31	.27	.81
18RA-14X	100	22-16	.170	1/4"	4	1.13	.50	.37	.88
RA727-170	1000	22-16	.170	5/16"	4	1.13	.50	.37	.88
14RB-4X	100	18-14	.200	#4	3	.94	.25	.27	.81
14RB-6X	100	18-14	.200	#6	3	.97	.31	.27	.81
RB857-200	1000	18-14	.200	#6	3	.97	.31	.27	.81
14RB-8X	100	18-14	.200	#8	3	.97	.31	.27	.81
RB867-200	1000	18-14	.200	#8	3	.97	.31	.27	.81
14RB-10X	100	18-14	.200	#10	3	.97	.31	.27	.81
RB877-200	1000	18-14	.200	#10	3	.97	.31	.27	.81
14RB-14X	100	18-14	.200	1/4"	4	1.14	.50	.38	.89
RB717-200	1000	18-14	.200	1/4"	4	1.14	.50	.38	.89
14RB-516X	100	18-14	.200	5/16"	4	1.15	.50	.38	.89
14RB-38X	100	18-14	.200	3/8"	4	1.16	.54	.35	.91
10RC-6X	50	12-10	.250	#6	5	1.06	.31	.27	.90
RC337-250	500	12-10	.250	#6	5	1.06	.31	.27	.90
10RC-8X	50	12-10	.250	#8	5	1.06	.31	.27	.90
RC777-250	500	12-10	.250	#8	5	1.06	.31	.27	.90
10RC-10X	50	12-10	.250	#10	5	1.06	.31	.27	.90
RC367-250	500	12-10	.250	#10	5	1.06	.31	.27	.90
10RC-14X	50	12-10	.250	1/4"	6	1.16	.50	.27	.90
RC717-250	500	12-10	.250	1/4"	6	1.16	.50	.27	.90
10RC-516X	50	12-10	.250	5/16"	6	1.17	.50	.37	.92
10RC-38X	50	12-10	.250	3/8"	6	1.29	.59	.44	.99
RC737-250	500	12-10	.250	3/8"	6	1.29	.59	.44	.99

U.L. Listed E9809

Installing tools: WT145C, WT2000, WT112M, ERG-2001, ERG-2003, WT1455, WT2130A (RC, RBC)

Most standard bulk catalog numbers can be put on Mylar Tape for reel fed applications (i.e. 12050 tool and application dies).

Please put the suffix M for Mylar Tape RA2573M. (Bulk number 1000 and 500 packages.)



Stock Thickness: .04

Vinyl Insulated Ring




Cat. No.	Stud Size	Max. Ins. Dia.	Wire Range	Dimensions			
				A	B	C	M
Series RDV—Aircraft Wire AN							
RDV10161	#8	.270	9,8,7	1.40	.41	.24	1.20
RDV10361	#10	.270	9,8,7	1.40	.41	.24	1.20
RDV10711	1/4"	.270	9,8,7	1.45	.45	.27	1.22
RDV10721	5/16"	.270	9,8,7	1.53	.56	.34	1.25
RDV10731	3/8"	.270	9,8,7	1.53	.56	.34	1.25
Code Wire AWG							
RDV167	#8	.340	9,8,7	1.48	.42	.28	1.29
RDV367	#10	.340	9,8,7	1.48	.42	.28	1.29
RDV717	1/4"	.340	9,8,7	1.54	.46	.36	1.32
RDV727	5/16"	.340	9,8,7	1.63	.57	.36	1.35
RDV737	3/8"	.340	9,8,7	1.63	.57	.36	1.35
RDV757*	1/2"	.310	9,8,7	1.79	.82	.55	1.39
Series REV—Aircraft Wire AN							
REV10261	#10	.315	9,8,7	1.55	.45	.24	1.31
REV10711	1/4"	.315	9,8,7	1.55	.49	.27	1.31
REV10721	5/16"	.315	9,8,7	1.70	.60	.34	1.40
REV10731	3/8"	.315	9,8,7	1.70	.60	.34	1.40
Code Wire AWG							
REV267	#10	.420	9,8,7	1.65	.45	.28	1.40
REV717	1/4"	.420	9,8,7	1.65	.49	.28	1.40
REV727	5/16"	.420	9,8,7	1.76	.61	.34	1.47
REV737	3/8"	.420	9,8,7	1.76	.61	.34	1.47
REV757*	1/2"	.395	9,8,7	1.83	.82	.55	1.43

Note: Not available on Mylar Tape.



* Brazed Seam, Lolly-Pop Style Tongue

NEW
RD and RE sizes now available with a U.L. 94V-0 Vinyl Insulator

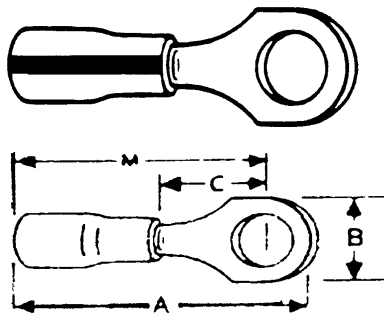

Stock Thickness:
RAT & RBT = .03
RCT = .04

Package Quantities:
RAT & RBT = 1000 pcs.
RCT = 500 pcs.

Tefzel Insulated Ring—Insulation Grip




Cat. No.	Stud Size	Max. Ins. Dia.	Wire Range	Dimensions			
				A	B	C	M
Series RAT—For U.L. 94V-O Flamability Rating/High Temperature and Chemical Resistance.							
RAT853	#6	.140	22-18	.81	.25	.25	.69
RAT863	#8	.140	22-18	.84	.31	.25	.69
RAT873	#10	.140	22-18	.84	.31	.25	.69
RAT713	¼"	.140	22-18	1.07	.46	.31	.84
Series RBT							
RBT853	#6	.170	16-14	.84	.31	.25	.69
RBT863	#8	.170	16-14	.84	.31	.25	.69
RBT873	#10	.170	16-14	.84	.31	.25	.69
RBT713	¼"	.170	16-14	1.08	.46	.31	.81
Series RCT							
RCT333	#6	.210	12-10	1.00	.37	.27	.81
RCT863	#8	.210	12-10	1.00	.37	.27	.81
RCT363	#10	.210	12-10	1.00	.37	.27	.81
RCT713	¼"	.210	12-10	1.11	.52	.32	.85
RCT703	⅜"	.210	12-10	1.23	.52	.31	.96
RCT733**	⅝"	.210	12-10	1.29	.58	.35	1.00

** Not available on tape.
 U.L. Listed E9809

Most standard bulk catalog numbers can be put on Mylar Tape for reel fed applications (i.e. 12050 tool and application dies).

Please put the suffix M for Mylar Tape RA2573M. (Bulk number 1000 and 500 packages.)



These non-insulated ring terminals are made of electrolytic copper for high conductivity. They can be installed with crimping tools having a single indenter or double indenter (recommended for solid wire). Serrated barrel increases grip on wire. Wire range identification is stamped on the tongue of each terminal.

Most standard bulk catalog numbers can be put on Mylar Tape for reel fed applications (i.e. 12050 tool and applicator dies). Consult tech service.

Please put the suffix M for Mylar Tape RA2573M.

(Bulk number 1000 and 500 packages.)

Stock Thickness:

A & B = .03

BC = .05

C = .04

Non-Insulated Ring



Cat. No.	Pkg. Qty.	Wire Range	Bolt Hole	Wt./Lbs. Per 1000	Dimensions			
					A	B	C	M
A18-4	100	22-16	#4	2	.75	.31	.27	.59
A18-6	100	22-16	#6	2	.72	.25	.27	.59
A85	1000	22-16	#6	2	.72	.25	.27	.59
A18-8	100	22-16	#8	2	.75	.31	.27	.59
A86	1000	22-16	#8	2	.75	.31	.27	.59
A18-10	100	22-16	#10	2	.75	.31	.27	.59
A87	1000	22-16	#10	2	.75	.31	.27	.59
A18-14	100	22-16	1/4"	3	.92	.50	.37	.67
A71	1000	22-16	1/4"	3	.92	.50	.37	.67
A72	1000	22-16	5/16"	3	.92	.50	.37	.67
A73	1000	22-16	3/8"	3	.99	.54	.35	.67
A18-12	100	22-16	1/2"	3	1.06	.72	.38	.70
A75	1000	22-16	1/2"	3	1.06	.72	.38	.70
B14-4	100	18-14	#4	2	.72	.25	.27	.59
B132	1000	18-14	#4	2	.72	.25	.27	.59
B14-6	100	18-14	#6	2	.75	.31	.27	.59
B133	1000	18-14	#6	2	.75	.31	.27	.59
B14-8	100	18-14	#8	3	.75	.31	.27	.59
B86	1000	18-14	#8	3	.75	.31	.27	.59
B14-10	100	18-14	#10	3	.75	.31	.27	.59
B87	1000	18-14	#10	3	.75	.31	.27	.59
B14-14	100	18-14	1/4"	6	.93	.50	.38	.68
B71	1000	18-14	1/4"	6	.93	.50	.38	.68
B14-516	100	18-14	5/16"	6	.93	.50	.38	.68
B72	1000	18-14	5/16"	6	.93	.50	.38	.68
B14-38	100	18-14	3/8"	6	.96	.54	.35	.68
B73	1000	18-14	3/8"	6	.96	.54	.35	.68
B14-12	100	18-14	1/2"	6	1.06	.72	.38	.70
B75	1000	18-14	1/2"	6	1.06	.72	.38	.70
B85	1000	18-14	#6	6	.75	.31	.27	.59
B134	1000	18-14	#8	6	.72	.25	.27	.59
BC14-6	50	heavy duty 16-14	#6	4	.81	.25	.29	.68
BC85	500	use C tooling	#6	4	.81	.25	.29	.68
BC14-8	50	heavy duty 16-14	#8	4	.87	.39	.29	.68
BC86	500	use C tooling	#8	4	.87	.39	.29	.68
BC14-10	50	heavy duty 16-14	#10	5	.87	.39	.29	.68
BC87	500	use C tooling	#10	5	.87	.39	.29	.68
BC14-14	50	heavy duty 16-14	1/4"	5	.93	.51	.29	.68
BC71	500	use C tooling	1/4"	5	.93	.51	.29	.68
BC14-516	50	heavy duty 16-14	5/16"	6	1.04	.54	.38	.77
BC72	500	use C tooling	5/16"	6	1.04	.54	.38	.77
BC14-38	50	heavy duty 16-14	3/8"	6	1.09	.63	.38	.77
BC79	500	use C tooling	3/8"	6	1.09	.63	.38	.77
BC14-12	50	heavy duty 16-14	1/2"	6	1.32	.76	.54	.94
BC75	500	use C tooling	1/2"	6	1.32	.76	.54	.94
C10-6	50	12-10	#6	4	.82	.31	.27	.66
C33	500	12-10	#6	4	.82	.31	.27	.66
C10-8	50	12-10	#8	5	.82	.31	.27	.66
C77	500	12-10	#8	5	.82	.31	.27	.66
C10-10	50	12-10	#10	5	.85	.38	.27	.66
C26	500	12-10	#10	5	.85	.38	.27	.66
C36	1000	12-10	#10	7	.82	.31	.27	.66
C10-14	50	12-10	1/4"	7	.91	.50	.27	.66
C71	500	12-10	1/4"	7	.91	.50	.27	.66
C10-516	50	12-10	5/16"	8	.98	.50	.38	.73
C70	500	12-10	5/16"	8	.98	.50	.38	.73
C72	1000	12-10	5/16"	7	1.10	.59	.45	.80
C10-38	50	12-10	3/8"	7	1.10	.59	.45	.80
C73	500	12-10	3/8"	7	1.10	.59	.45	.80
C10-12	50	12-10	1/2"	7	1.21	.72	.38	.84
C75	500	12-10	1/2"	7	1.21	.72	.38	.84

U.L. Listed E9809

Installing tools: WT111M, WT112M, WT110M, ERG-2002, WT1300, WT2000, WT3155A