



.100" (2.54mm) Staggered (Interstitial) PGA Sockets

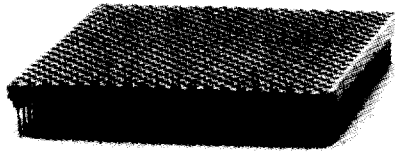


Terminal Information

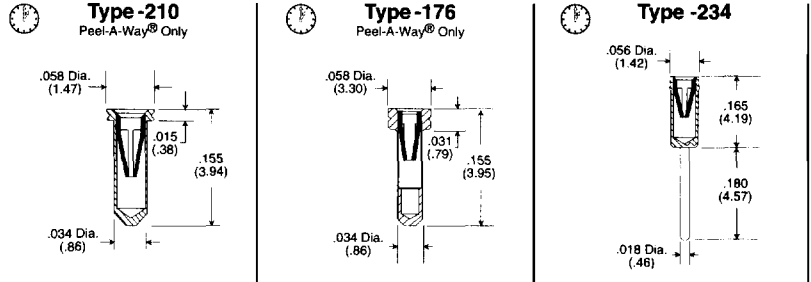

Features:

- Available in high temperature Peel-A-Way® removable terminal carrier.
- .100" (2.54mm) centers pin to pin.
- Multiple finger contact for reliability.
- Tapered entry for ease of insertion.
- Closed end construction for 100% anti-wicking of solder.
- Low insertion force socket.
- Available with solder preforms.

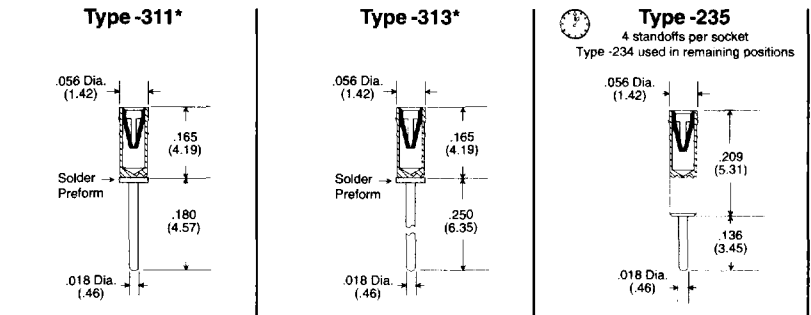

Quick turn delivery available on standard terminal types.

Terminals and Contacts:

- Terminal: Brass - Copper Alloy 360 ASTM-B-16
- Contact: BeCu - Copper Alloy 172 ASTM-B-194

Additional terminal types available. See terminal section for detailed terminal information.

Plating:


- Terminal: Gold over Nickel or Tin-Lead over Nickel
- Contact: Gold over Nickel or Tin-Lead over Nickel
- Gold per MIL-G-45204
- Tin-Lead per MIL-P-81728
- Nickel per QQ-N-290

How To Order




Body Material:

CSX - Glass Filled Thermoplastic, U.L. Rated 94V-O, Consult factory for availability.




KSX - Polyimide Film -269°C to 400°C (-452°F to 752°F)




Socket Options



RTV Sealed - Pg. 86



Tape Sealed - Pg. 87



Solder Preform - Pg. 85

See designated pages for how to order information on these socket options.