# Base mount double row terminal blocks

## **Series KU**

**Specifications** 

**Description:** Base mount double row terminal blocks.

Ratings:

Volts: - 600V Amps: - 60A\*

Center Spacing: 0.625" (15.88mm).

Poles: 2-12.

Wire Range: #6-22 AWG CU.

Screw Size: #10-32 nickel-plated brass.

Torque Rating: 20 in-lb.

Distance Between Barriers: 0.437" (11.09mm).

Mounting: Base mount. For 35mm DIN rail mountable, add

ND prefix.

Construction: Molded, black thermoplastic base with

nickel-plated brass terminals.

**Operating Temperature:** 105°C max. **Agency Information:** UL/CSA; CE Certified.


Flammability Rating: UL 94V0.


\* 60A rating achieved with #6 copper wire crimped to ring terminal.

#### **Dimensions - in**

	KU		KUX Only	
Poles	Α	В	Α	
02	2.50	1.62	2.00	
03	3.12	2.25	2.62	
04	3.75	2.87	3.25	
05	4.37	3.50	3.87	
06	5.00	4.12	4.50	
07	5.62	4.75	5.12	
08	6.25	5.37	5.75	
09	6.87	6.00	6.37	
10	7.50	6.62	7.00	
11	8.12	7.25	7.62	
12	8.75	7.87	8.25	
1" - OF 4r	nm			

1" = 25.4mm.

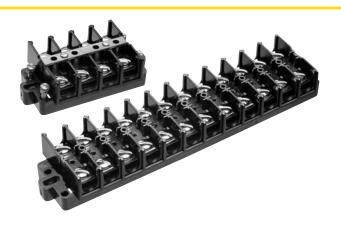

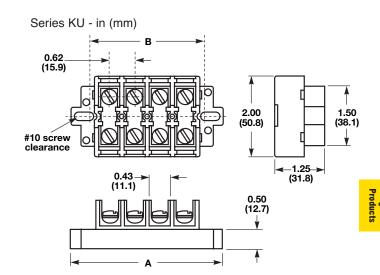

## **Catalog Number Build-A-Code**

Series	Poles	Screw Options	Covers	Marking Strip
KU = Standard block KUH = Block KUX = Short block KUSC = Standard w/shorting strap & 4 shorting screws KURL = Standard w/removable link KUXSC = Short block w/shorting strap & 4 Shorting screws	02 to 12	00 = Screws shipped bulk W = Brass washer head, nickel-plated P = Steel screw w/pressure plate zinc-plated B = Brass washer head, no plating BP = Brass philslot, nickel-plated	WC = Top cover & 2 end plates	MT = Matte finish NU = Numbered 1 to 12, horizontal NUV = Numbered 1 to 12, vertical PT = Marker strip for cover

### **Accessories**

KUXRL = Short block w/removable link



MTMU## Molded Marking Tape Matte Finish



NUM## Molded Marking Tape



JU12 Jumper 12 Circuits



NUE End Piece for NUC



NUC## Cover