

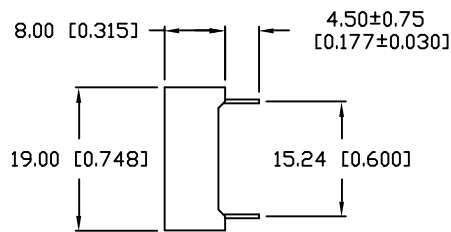


DATE	REVISIONS	REV
4-22-98	E.C.N. #10BRDR. & #10387. & REDRAWN./	A

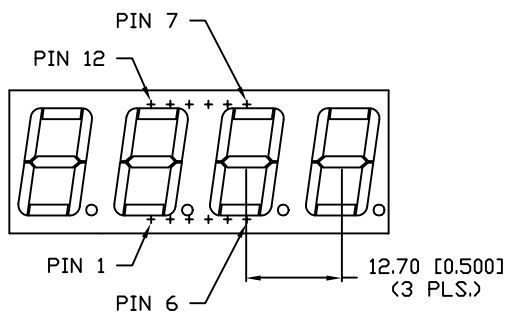


DIGIT DETAIL

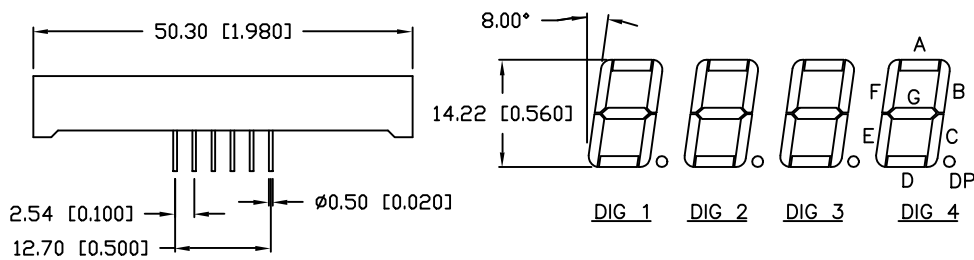

COMMON ANODE

- DIG 1: PIN NO. 12
- DIG 2: PIN NO. 9
- DIG 3: PIN NO. 8
- DIG 4: PIN NO. 6

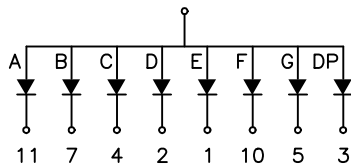

ELECTRO-OPTICAL CHARACTERISTICS

PARAMETER	MIN
PEAK WAVELENGTH	565
FORWARD VOLTAGE	
REVERSE VOLTAGE	5.0
AXIAL INTENSITY	
EMITTED COLOR:	GREEN
FONT COLOR:	GREY
SEGMENT COLOR:	MILKY WHITE

LIMITS OF SAFE OPERATION

PARAMETER	MIN
PEAK FORWARD CURRENT*	
STEADY CURRENT	
POWER DISSIPATION	
DERATE FROM 25°C	
OPERATING, STORAGE TEMP.	
SOLDERING TEMP.	
2.0mm FROM BODY	

* $t < 10\mu s$

RELIABILITY NOTE
 OUR MANY YEARS OF EXPERIENCE
 THAT SOLDER HEAT IS A MAJOR CAUSE
 FAILURE. PLEASE PAY ATTENTION TO



CONFIDENTIAL
 THE INFORMATION CONTAINED IN THIS DOCUMENT IS UNCLASSIFIED
 EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY THE ISSUING OFFICE.
 THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN
 SAME IN WHOLE OR IN PART FROM DISCLOSURE TO THE PUBLIC.

DATE: 11-6-96

DWN:

SCALE: N/A

0.56" QUAD DIGIT, SEVEN SEGMENT
 GREY FONT/WHITE SEGMENT

PAGE 1 OF 1

UNLESS OTHERWISE SPECIFIED TOLERANCE IS $\pm 0.25mm$ ($\pm 0.010"$)

DU