


# D-SUB FEMALE CONNECTOR



## 070262FR Series

### Specifications:

- **Insulator material** : P.B.T UL 94V-0
- **Operating Type Range** : -40°C TO +105°C
- **Terminal Material** : Brass
- **Platings** : Gold Plated or Selective Gold/Tin Over Nickel
- **Max. Current Rating** : 2.5A
- **Max. Voltage Rating** : 250V AC
- **Dielectric Strength** : 500V AC For 60 Seconds

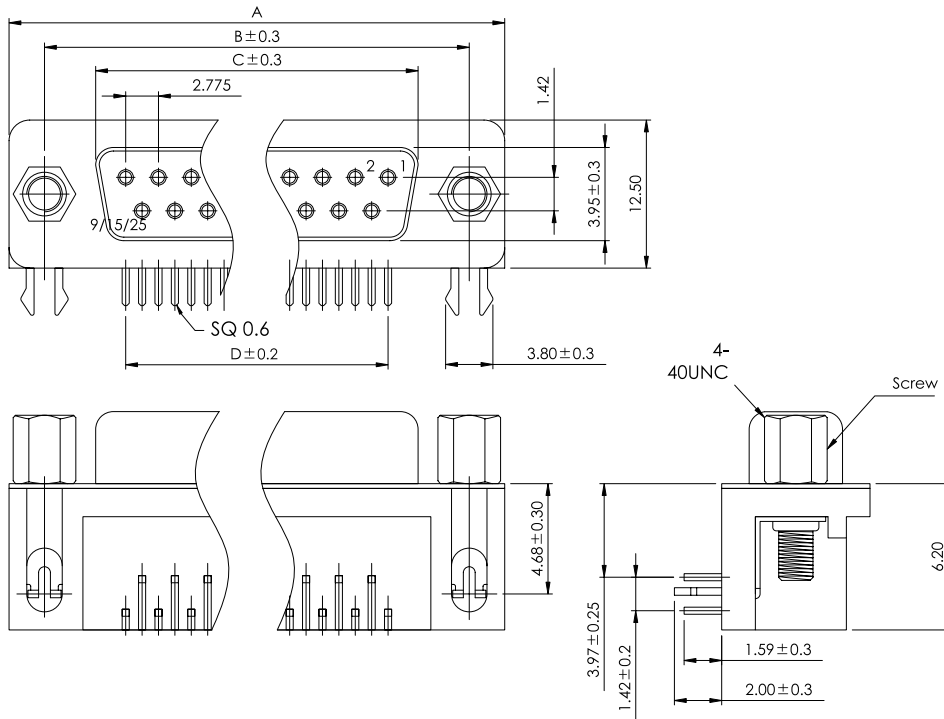


## Order Information

070262FR□□□□□□□□A  
 1 2 3 6 4 5

1. 'R' : Right Angle DIP Type
  2. No. of Pins
  3. Plating
  4. Color 'Z' : Black  
 'B' : Moss Green  
 'G' : Gold  
 'A' : Purple
  5. Package  
 'A' : Tray Package Without Cap
  6. Similar Type  
 (Dimensional Information II)
- Reference Page II

## Recommended P.C.B Layout

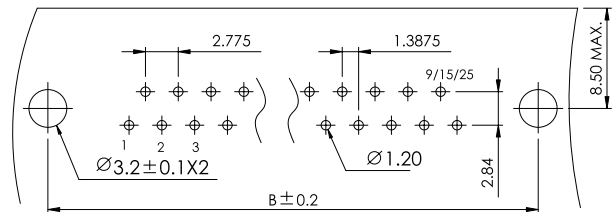

### Dimensional Information I

SUYIN P/NO.	Dim.A	Dim.B	Dim.C	Dim.D
070262MR009□□□□□A	30.80	25.00	16.30	11.10
070262MR015□□□□□A	39.20	33.30	24.60	19.425
070262MR025□□□□□A	53.05	47.05	38.30	33.30

### Dimensional Information II

SUYIN P/NO.	
070262FR009□□□□18A	Without Screw
070262FR009□□□□19A	With Screw