



MARKETING SALES DRAWING

DIMENSIONS IN INCHES - DO NOT SCALE THIS DRAWING
DIMENSIONS IN METRIC - []

This drawing is the property of
 Tusonix, Inc., and may not be
 used, reproduced, published or
 disclosed to others without ex-
 pressed authorization by Tusonix Inc.

Electrical Testing
 per Tusonix standard
 test plans and Mil-Std-202
 Test Methods.

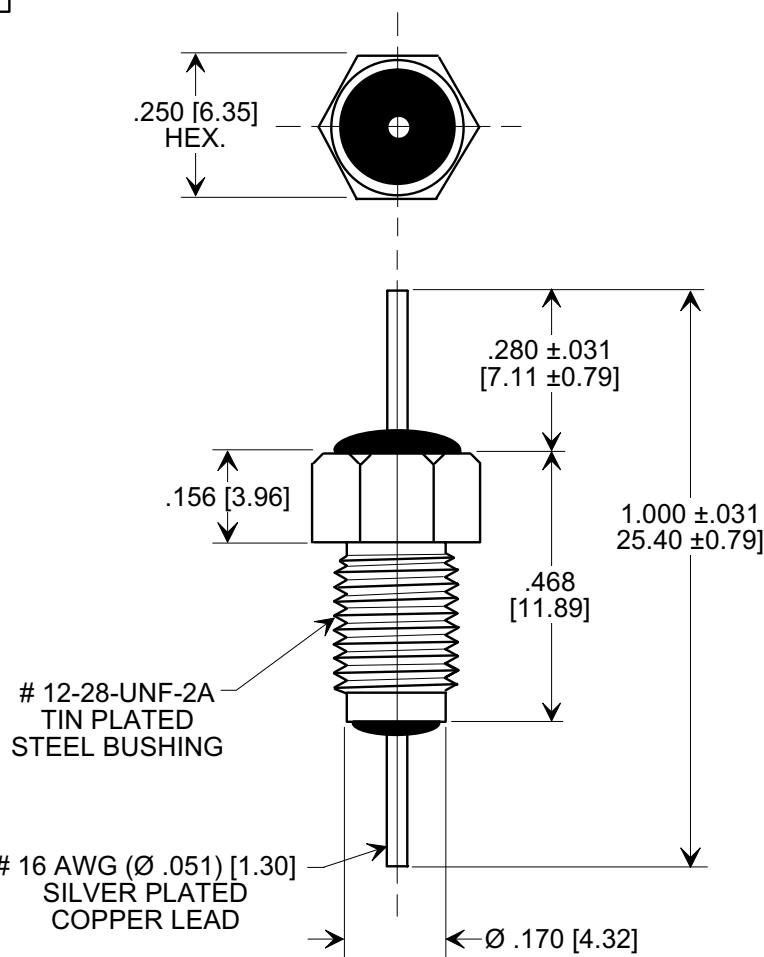

ORDERING INFORMATION

TUSONIX STYLE:	2499-522
CAPACITANCE VALUE:	10,000 pF
CAPACITANCE TOL.::	+80, -20%
TEMP. CHARACTERISTICS:	X5W
RATING:	1000 VDC @ 85°C
CURRENT (A):	20
OPERATING RANGE:	-55 TO +85°C
I.R. MIN. @ 100 (VDC):	10 G Ω
DWV (VDC):	1750

NOTES:

1. SUPPLIED WITH SILVER PLATED HEX NUT AND INTERNAL TOOTH LOCK WASHER.
2. TUSONIX STANDARD PART
NUMBER: 2499-522-X5W0-103Z.
TUSONIX RoHS COMPLIANT PART
NUMBER: 2499-522-X5W0-103Z_LF.
CUSTOMER MUST SPECIFY STANDARD OR RoHS PART NUMBER WHEN ORDERING.
3. MOUNTING HARDWARE: TIN PLATED LOCK WASHER & BUSHING.
4. PART MARKING: TRADEMARK, CAPACITANCE CODE AND TOLERANCE CODE STAMPED ON BUSHING HEX FLATS:
STANDARD PART: BLACK MARKING.
RoHS COMPLIANT PART: GREEN MARKING.

REVISION RECORD	
Original Release C.O. 19980623-2-02	0
ADDED CURRENT, IR, DWV & METRIC, ADDED & REVISED NOTES. S.M. 07-31-06	1
20060712-6-17	1
CORRECT TYPO. S.M. 11-30-07	2
20071129-2-01	2

--TOLERANCES--
 Unless Otherwise Specified

DECIMAL \pm .015 [0.38]

ANGLES \pm

Title **BUSHING STYLE
FEED-THRU
CAPACITOR**
 Drawn S.M. 06-26-98 Scale 3 X

Approved S.C. 06-26-98

TUSONIX
 TUCSON, ARIZONA

A **2499-522-X5W0-103Z**