

[English](#)
[Español](#)
[Français](#)
[Italiano](#)
[Deutsch](#)
[中文显示](#)
[日本語](#)
[한국어](#)

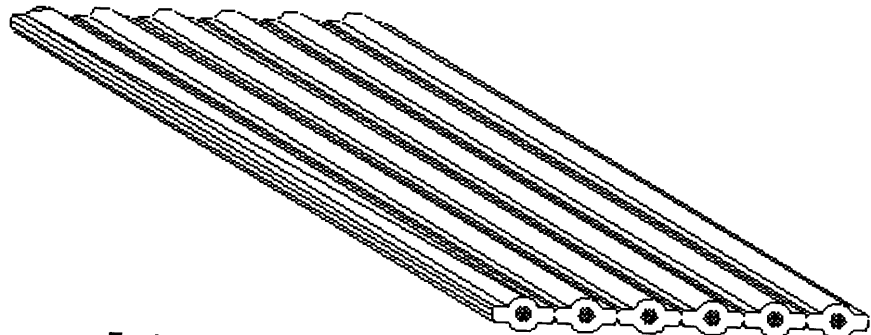
**Datasheet****Flat Ribbon Cable**

2.54mm (.100") Pitch Round Conductor Flat Cable - 28 AWG (7 x 36) Stranded, Tinned 7307

[ [Home](#) > [Products](#) > [Flat Ribbon Cable](#) > [Datasheet](#) ]

[Help](#)

Series	7307
Pitch [mm (inches)]	2.54mm (.100")
Wire Size [AWG]	28
Wire Type	(7x36) Stranded, Tinned
Circuits	2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, 27, 28, 29, 30, 31, 32, 33, 34, 35, 36
Voltage-max [volts]	300V
Electrical Specifications	<a href="#">View Chart</a>
Flammability	VW-1
Temperature Range	-20°C to +105°C
Insulation	PVC
Color	Gray
Edge Mark	Black
Use With	70400a, 70400d, 70400g, 70475, 7720, 7720d, 7720s
UL File No.	E61522
UL Style	2651
CSA File No.	LL61126
Designed In	Inches
Packaging	Reel
Comment	82-28-58xx, 82- 28-6xx2, 82-28- 6xx5, 7307
990 Catalog Page	H-11
MX01 Catalog Page	H-38

**Features and Benefits**

- Sizes 2 to 36 circuits
- 100% tested for insulation resistance
- Bulk cable available on 100', 300', and 500' reels
- Notched cable is also available on 100', 300', and 500' reels, contact Inside Sales
- To order complete cable assemblies, contact Inside Sales

[ © Copyright 2001 Molex Incorporated ]