



**5.08mm (.200") Pitch  
Beau Eurostyle®  
High Profile, Two Level  
Terminal Block**

**39880  
Modular**

**FEATURES AND SPECIFICATIONS**

**Features and Benefits**

- Sizes 4 to 48 circuits
- Holds wires for secure, reliable contact
- Modular construction reduces inventory
- High flammability rating

**Electrical**

Voltage: 300 V  
Maximum Current: 24 Amp  
Insulation Resistance: >5,000 Megaohms

**Mechanical**

Max. Tightening Torque: 5 in. lbs, .56 Nm  
Operating Temperature: 110°C  
Wire Strip Length: 1/4" or 6mm

**Physical**


Insulator: Polyamide, UL94 V-0, black  
Screws: Bronze  
Screw Plating: Nickel  
Contacts: Copper Alloy  
Contact Plating: Tin  
Pressure Clamp: Brass  
Pressure Clamp Plating: Nickel  
Wire Range: 12 to 26 AWG, 2.5 to 0.2mm<sup>2</sup>

**Reference Information**

UL : File No. E48521  
Guide No. XCFR2  
CSA: File No. 025562



**CATALOG DRAWING (FOR REFERENCE ONLY)**

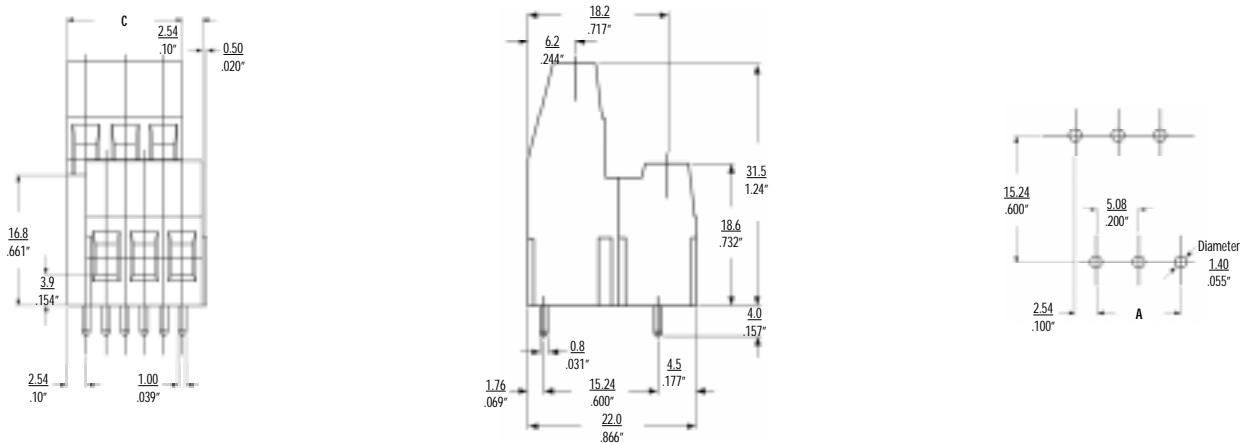

**ORDERING INFORMATION AND DIMENSIONS**

Order # (Engineering #) Replace XX with # of circuits, 04-48

**Tin Plated**  
39880-07XX (8824XX)

# of Circuits	A		C		# of Circuits	A		C	
	in	mm	in	mm		in	mm	in	mm
4	.20	5.1	.42	10.2	28	2.60	66.0	2.82	71.1
6	.40	10.2	.62	15.2	30	2.80	71.1	3.02	76.2
8	.60	15.2	.82	20.3	32	3.00	76.2	3.22	81.3
10	.80	20.3	1.02	25.4	34	3.20	81.3	3.42	86.4
12	1.00	25.4	1.22	30.5	36	3.40	86.4	3.62	91.4
14	1.20	30.5	1.42	35.6	38	3.60	91.4	3.82	96.5
16	1.40	35.6	1.62	40.6	40	3.80	96.5	4.02	101.6
18	1.60	40.6	1.82	45.7	42	4.00	101.6	4.22	106.7
20	1.80	45.7	2.02	50.8	44	4.20	106.7	4.42	111.8
22	2.00	50.8	2.22	55.9	46	4.40	111.8	4.62	116.8
24	2.20	55.9	2.42	61.0	48	4.60	116.8	4.82	121.9
26	2.40	61.0	2.62	66.0					

\*Consult factory for sequential numbering option