


**COMMON MODE CHOKE**

**P/N: BCM-102 DATA SHEET**

**Feature**







- Used in suppression of EMI noise.
- Designed for Ethernet, Token Ring.
- Operating temperature : 0°C to 70°C.
- Storage temperature range: -25°C to +125°C.

Electrical Specifications@25°C						
Part Number	Turns Ratio	OCL (uH Min) @ 100KHz/100mV	L.L(uH Max) @ 100KHz/100mV	C <sub>www</sub> (pF Max)	DCR (Ω Max)	HI-POT (Vrms)
BCM-102	1:1:1:1	18	0.2	10	0.25	1500

**Schematic**

**Mechanical**

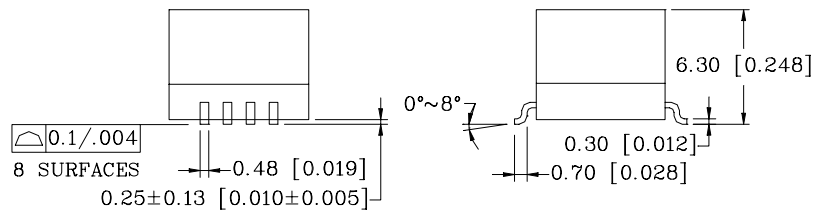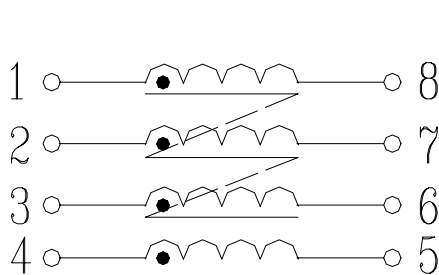

Units: mm[Inches] Tolerances: xx.x0±0.25[0.010]  
0.xx±0.05[0.002]