


### Specifications

| Parameter                        | Unit | Minimum               | Typical | Maximum |
|----------------------------------|------|-----------------------|---------|---------|
| Center Frequency                 | MHz  | 159.9                 | 160     | 160.1   |
| Insertion Loss                   | dB   |                       | 21.5    | 23      |
| 1dB Bandwidth                    | MHz  |                       | 9.05    |         |
| 3 dB Bandwidth                   | MHz  | 9.40                  | 9.41    |         |
| 40dB Bandwidth                   | MHz  |                       | 10.8    | 10.9    |
| Passband Variation               | dB   |                       | 0..8    | 1       |
| Group Delay Variation(f0±4.4MHz) | nsec |                       | 60      | 100     |
| Absolute Delay                   | usec |                       | 2.66    |         |
| Ultimate Rejection               | dB   | 40                    | 43      |         |
| Substrate Material               |      | YZLN                  |         |         |
| Ambient Temperature              | °C   | 25                    |         |         |
| Package Size                     |      | 24.64mmx8.99mmx1.75mm |         |         |

#### Notes:


1. All specifications are based on the test circuit shown
2. In production, devices will be tested at room temperature to a guardbanded specification to ensure electrical compliance over temperature
3. Electrical margin has been built into the design to account for the variations due to temperature drift and manufacturing tolerances
4. This is the optimum impedance in order to achieve the performance show

### Matching Configuration

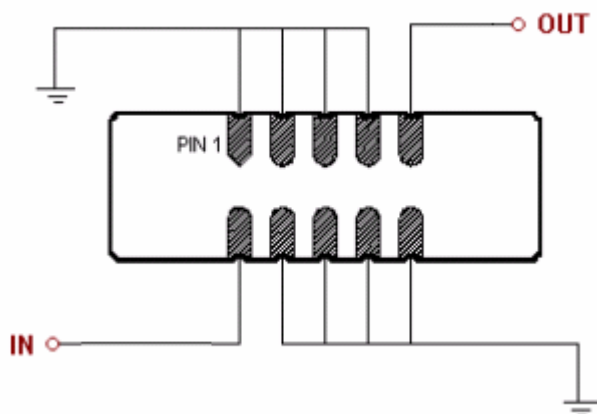


**Source/Load Impedance=50 ohm**

Notes - Component values may change depending on board layout.

|  |   |             |           |      |
|--|---|-------------|-----------|------|
|  | <b>SIPAT Co., Ltd.</b><br>( CETC No. 26 Research Institute )<br>Nanping Huayuan Road No. 14<br>Chongqing, China, 400060 | Part Number | LBN16023  |      |
|  |   | Rev. Date   | 2005-4-14 |      |
|  |   | Rev.        | 1.0       | Page |

*Package Dimension*

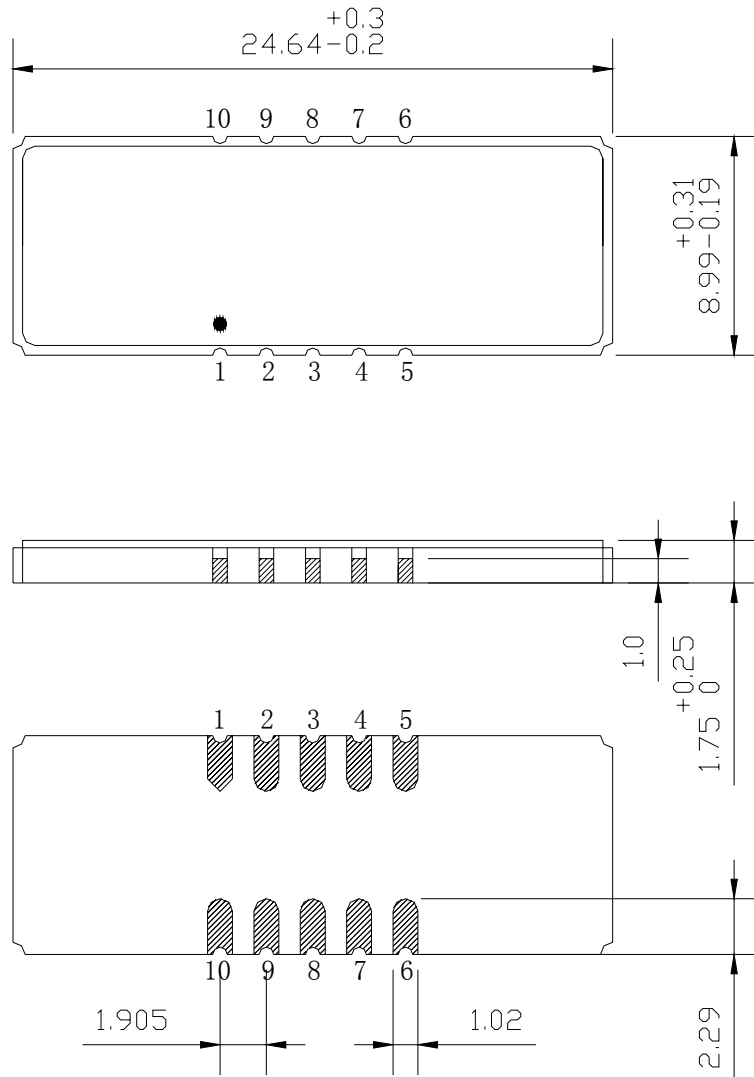


**SIPAT Co., Ltd.**  
( CETC No. 26 Research Institute )  
Nanping Huayuan Road No. 14  
Chongqing, China, 400060


|             |           |          |
|-------------|-----------|----------|
| Part Number | LBN16023  |          |
| Rev. Date   | 2005-4-14 |          |
| Rev.        | 1.0       | Page 2/3 |

Typical Performance


Frequency Respond

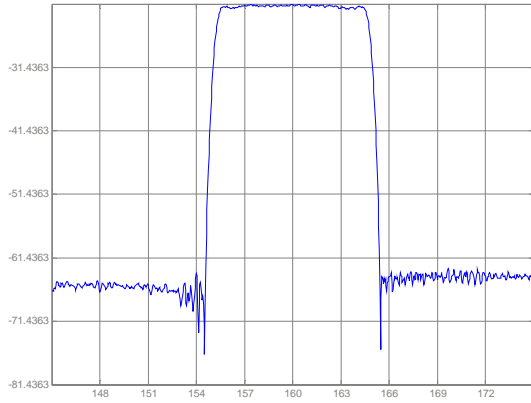


Passband Respond

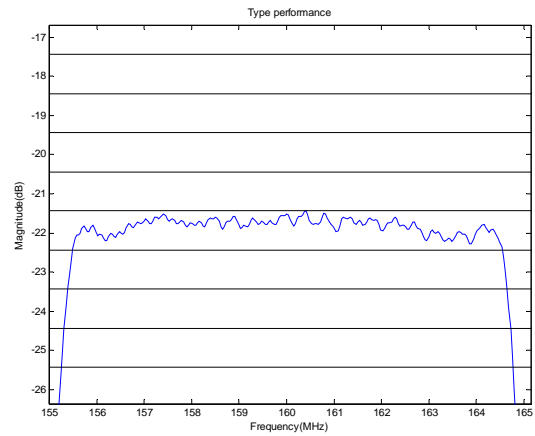


Group Delay Variation( $f_0 \pm 4.4$  MHz, smooth)

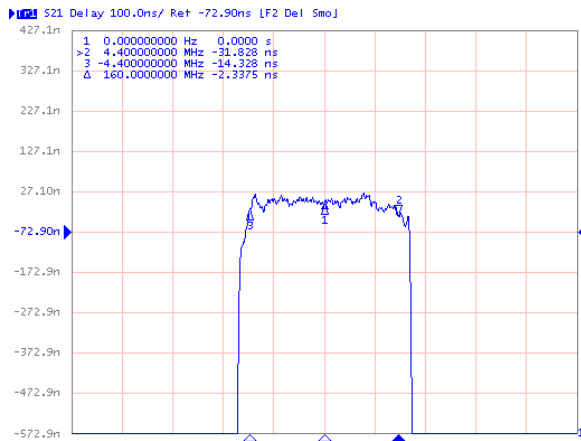


Phase Linearity( $f_0 \pm 4.4$  MHz)

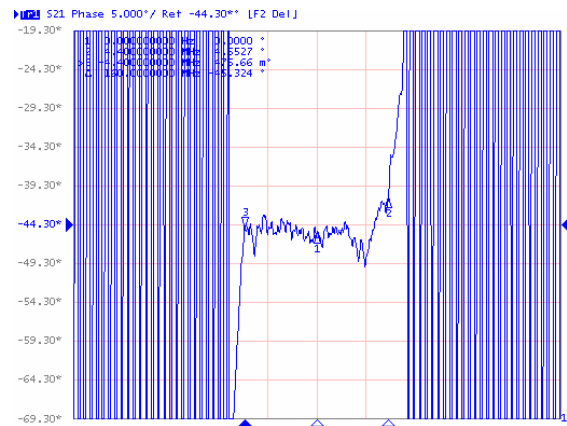

Simth Chart S11

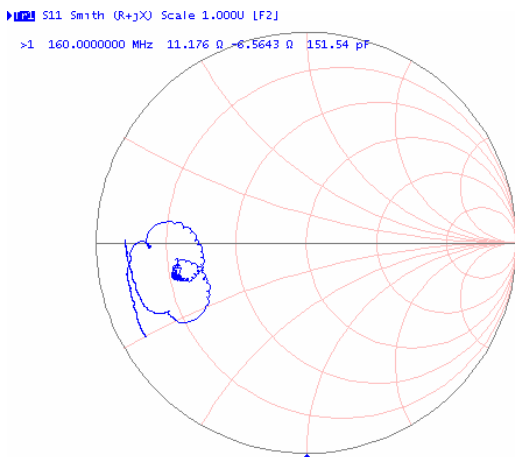

Simth Chart S22

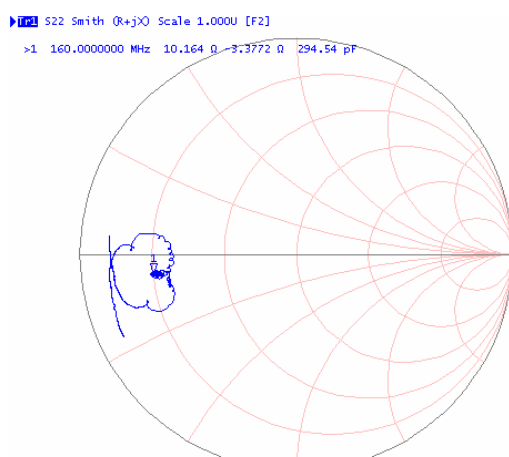

**SIPAT Co., Ltd.**  
( CETC No. 26 Research Institute )  
Nanning Huayuan Road No. 14  
Chongqing, China, 400060

|             |           |          |
|-------------|-----------|----------|
| Part Number | LBN16023  |          |
| Rev. Date   | 2005-4-14 |          |
| Rev.        | 1.0       | Page 3/3 |