

## 155 Mbps PIN-TIA (1310nm) 3.3V


*Preliminary*

### Features

- 155 Mbps typical bandwidth.
- InGaAs/InP PIN Detector with transimpedance amplifier in a TO-46 hermetic package.
- High sensitivity with AGC.
- Differential ended output
- Single +3.3V operation.

### Applications

- ◆ **Optical Communication Receiver / Transceiver**
  - SONET OC-3/SDH STM-1
  - Fast Ethernet
  - Fiber Channel

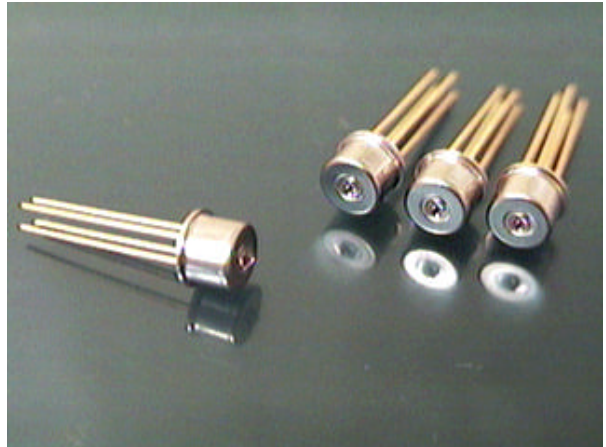

### Handling and Safety Precautions

Anti-static protection, such as ionized air blowers or grounded wrist straps with a 1 mega series resistor, should be used at all times when handling laser diodes. In addition, soldering irons should be well grounded.

Overheating caused by soldering of the leads of a laser diode must be prevented. Recommend soldering iron temperature and maximum exposure time are below 260°C and 10 seconds.

### Description

The MCD-3T4C-001 is a high performance 1310 nm InGaAs/InP PIN detector with transimpedance-amplifier .This product is designed for short and medium distance optical fiber communication.

The MCD-3T4C-001 is compatible with industry standard wave or hand solder processes.

*Preliminary*

**Absolute Maximum Ratings (Tc = 25 °C)**


Parameter	Symbol	Rated Value	Unit
Voltage	V	4.5	V
Operating case temperature	Top	- 40 to +85	°C
Storage temperature	T <sub>STG</sub>	- 40 to +85	°C

**DC/ Electrical Characteristics (Tc = 25 °C)**


Parameter	Symbol	Min.	Typ.	Max.	Unit
Supply power	Vcc	3.0	3.3	3.6	V
Differential Output Voltage	Vd	-	1	-	V
Supply current (no load)	Icc	-	-	24	mA

**AC/ Optical & Electrical Characteristics (Tc = 25 °C)**

Parameter	Symbol	Test Conditions	Min.	Typ.	Max.	Unit
Detection Range			1100	1310	1650	nm
Active Area			-	75	-	µm
Gain@10Mbs Differential	G	λ=1300nm	50	-	70	V/mW
Bandwidth	BW	P <sub>f</sub> =1W	120	140	-	MHz
Saturation Power	Psat	λ=1300nm	-3	0	-	dBm
Sensitivity	Sens	BER=10 <sup>-10</sup> @155Mbps	-	-37	-35	dBm
Output Resistance	Rout		-	50	65	ohm
Operation Speed			-	155	-	Mbps

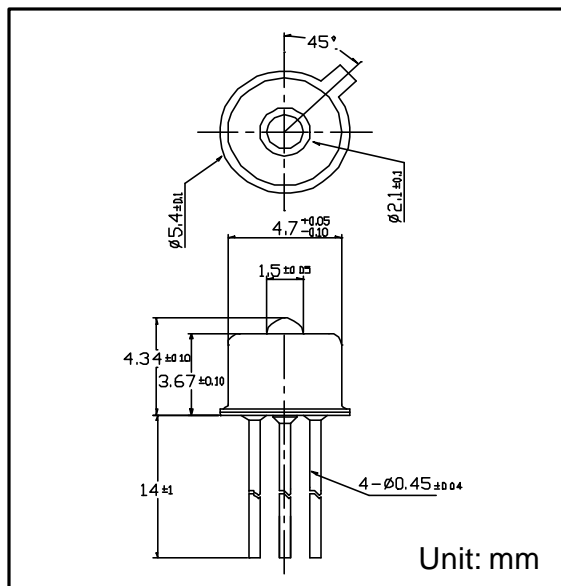

**Package Dimensions**

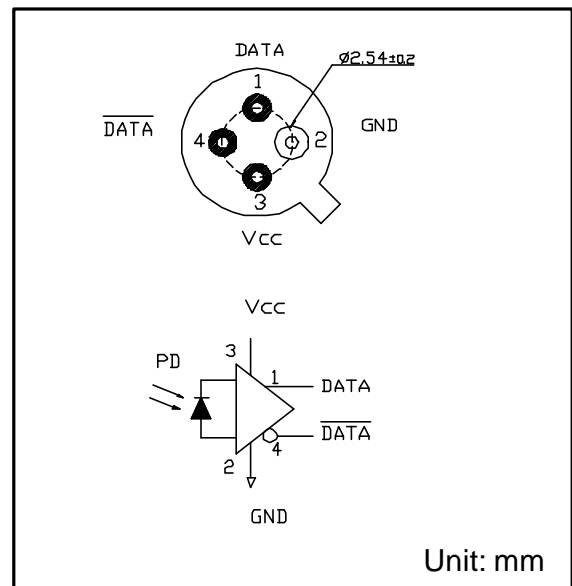

**Pin Connections ( Bottom View )**

NOTE: Specifications are subjected to change without notice.